
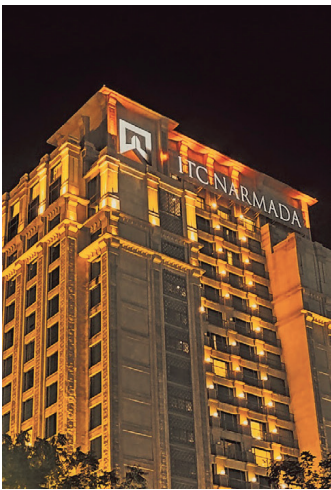


Facade/Projection Lights

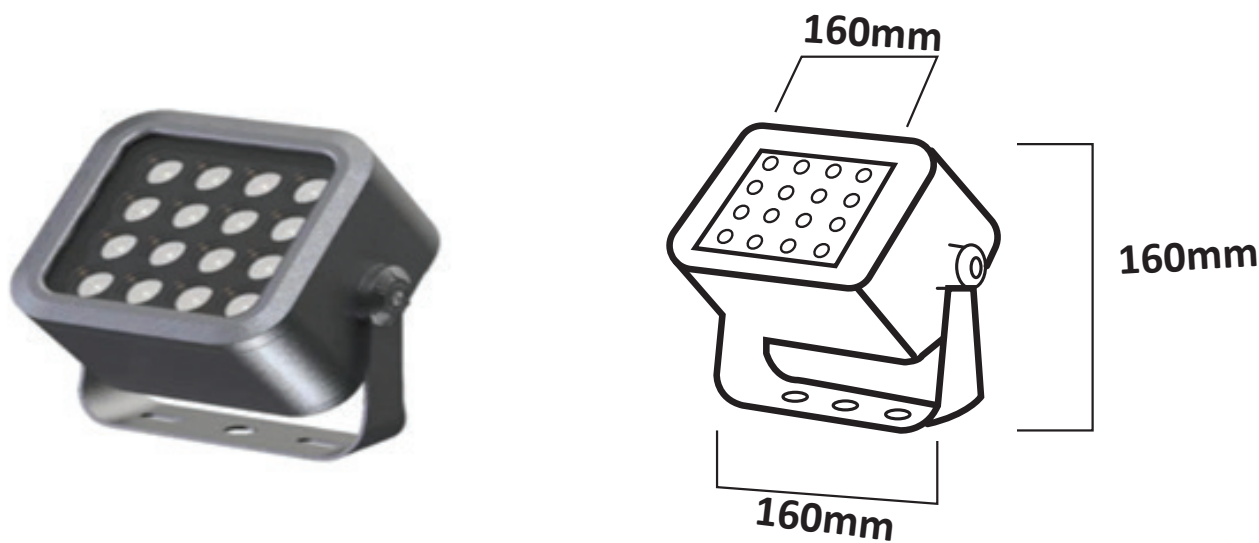

Model : iLED 36 OL 670019


PRODUCT DESCRIPTION

The Facade/Projection luminaires are in the range of 36w. Universal power supply/drivers with input range of 90 - 280V AC 50/60 Hz and PF >0.95. The material used is Ventilated powder coated die cast aluminum with tempered glass & reflector.It is ideal for sign, Bulding facade, accent, general security lighting etc.

SPECIFICATION

Material : Powder Coated Die Cast Aluminium With
Specialised Lens & Tempered Glass
Mounting : Surface Mount
Power: 36W
Input Volatage : 90-280V AC
Lumen Flux: 3600 - 5760Lm
Color : WW/WW/NW
Dimesion : 160mm X 160mm X 160mm
IP Rating : IP67
Driver : Internal
Operating Temp : -40°c~ + 70°c

BEAM ANGLE

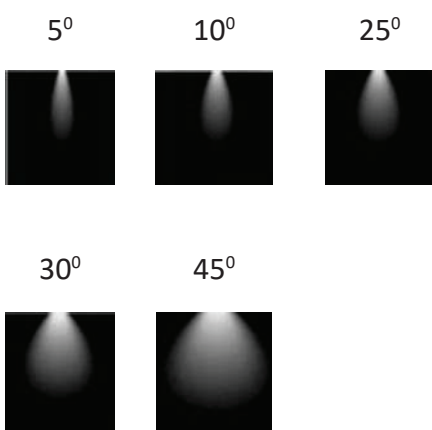

ORDERING INFORMATION

iLED	36	OL	670019	W	WW	NW
Brand Name	Rated Power	Outdoor Light	Model No.	White	Warm White	Neutral White

www.iled.in
iLED Lighting Systems Pvt Ltd
Chennai-600096, Tamil Nadu, India