


Facade/Projection Lights

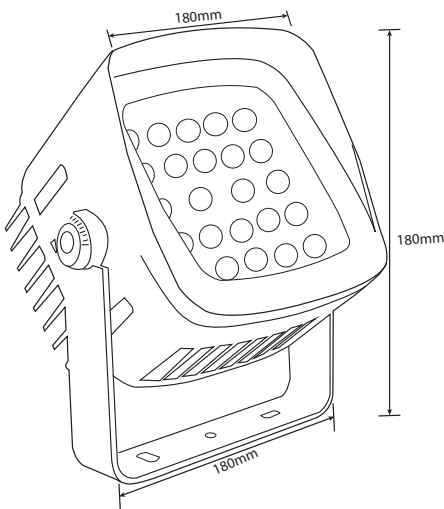

Model : iLED 50 OL 670023


PRODUCT DESCRIPTION

The Facade/Projection luminaires are in the range of 3X9W. Universal power supply/drivers with input range of 90 V to 280 V AC 50/60 Hz and PF >0.95. The material used is Ventilated powder coated die cast aluminum with tempered glass & reflector.It is ideal for sign, Bulding facade, accent, general security lighting etc. Different fixture colours available on request.

SPECIFICATION

Material : Powder coated Die cast Aluminium
with Specialised Lens & Tempered Glass
Mounting : Surface Mount
Lumen flux : 5000-8000Lm
Input: 90-280V AC
Rated Power : 50 WATTS
Color : WW/NW/W
Dimesion : 180 X 180 X 180 mm
IP Rating : IP67
LIGHT DEGREE OPTIONS AT REQUEST

BEAM ANGLE

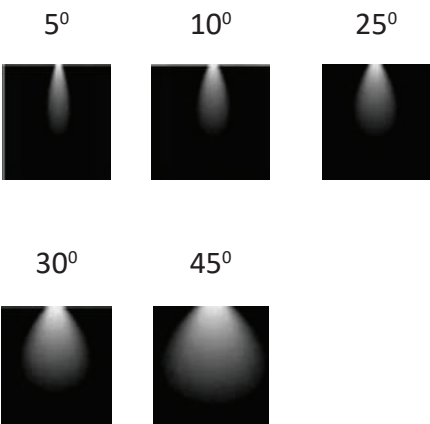

ORDERING INFORMATION

iLED	50	OL	670023	WW	NW	W
------	----	----	--------	----	----	---

Brand Name	Rated Power	Outdoor Light	Model No.	Warm White	Neutal White	White
------------	-------------	---------------	-----------	------------	--------------	-------

www.iled.in
iLED Lighting Systems Pvt Ltd
Chennai, Tamil Nadu, India 600096