


Recess Mount Ceiling Down Lights (BACK LIT)

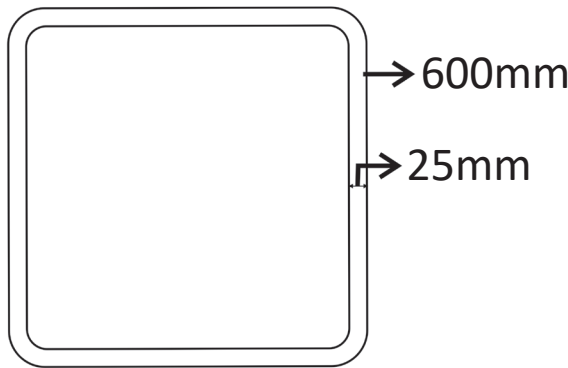

Model : iLED 60 EPL SM CDL SQR 33009

PRODUCT DESCRIPTION

The Facade/Projection luminaires are in the range of 60W Universal power supply/drivers with input range of 90 -280 V AC and PF >0.95. The material used is Ventilated powder coated die cast aluminum with tempered glass & reflector.It is ideal for sign, Bulding facade, accent, general security lighting etc.
Different fixture colours available on request.

SPECIFICATION

Material : Plastic with Aluminum PCB
Mounting : Surface Mount
Input: 90-280V AC
Rated Power : 60W
Lumen Flux: 6000-9600Lm
Color : 3000-6000K
Dimesion : 600 X 600 X 25 mm
IP Rating : IP20
CRI : >80

ORDERING INFORMATION

iLED	60W	CDL	33009
Brand Name	Rated Power	Outdoor Light	Model No.