
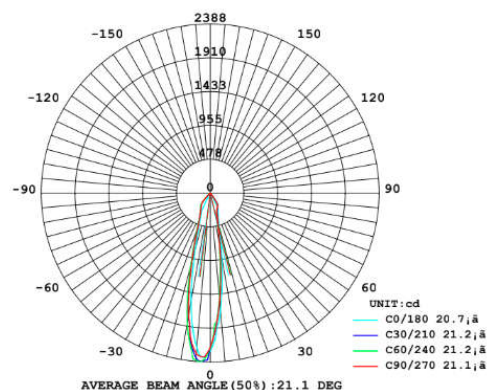


COB Down Light

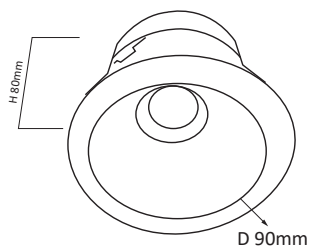

Model: iLED 8/10 RDL COB 330036 - REAR ADJUSTABLE

PRODUCT DESCRIPTION


The recessed mount luminaire is made of aluminium and depending on the fixture size it is available in the range of 12/15 W Universal powersupply/drivers within put range of 90-280V AC 50/60Hz and PF>0.96. It is ideal for hotel, showroom, home, office, theatres, auditorium,etc.

Different fixture colour savailable on request.

SPECIFICATION

| | |
|--------------------|---|
| Material | : Ventilated Aluminium Cooling With Specialised Lens & Polished Reflector |
| Mounting | : Recess mount |
| Power | : 12/15 WATTS |
| Voltage | : 90 – 280 V AC 50/60 Hz |
| Power Factor | : >0.96 |
| LED colors | : WW/NW/W |
| Lumen Flux | : 1200-1920Lm/1500-2400Lm |
| Dimension | : D-90 X H-80 mm |
| Cut-out diameter | : 75 mm |
| Driver | : External |
| Operating Temp | : -40°C ~ + 70°C |
| CRI | : 85 |
| Led used | : CREE ⇄ |
| Dimmable Interface | : CASAMBI , Colour tunable (2700 K – 6000 K), DALI Edge pulse/0/1-10 V dimming control (optional) |

BEAM ANGLE

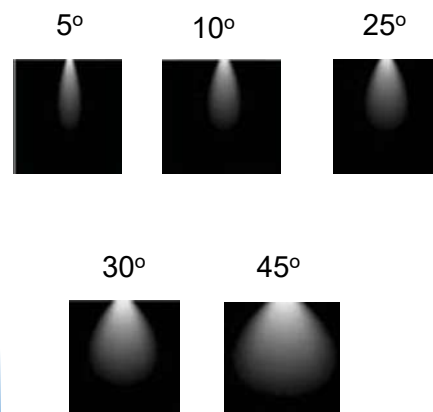

ORDERING INFORMATION

| | | | | | | | |
|------------|-------------|------------------|---------------|-----------|-------|------------|---------------|
| iLED | 12/15 | RDL | COB | 330036 | W | WW | NW |
| Brand name | Rated Power | Round Down Light | Chip On Board | Model No. | White | Warm White | Neutral White |

The technical specifications may vary due to continuous improvement without prior notice.

*Logos of products and companies are used for reference

www.iled.in

iLED Lighting Systems Pvt Ltd
Chennai, Tamil Nadu, India 600096