
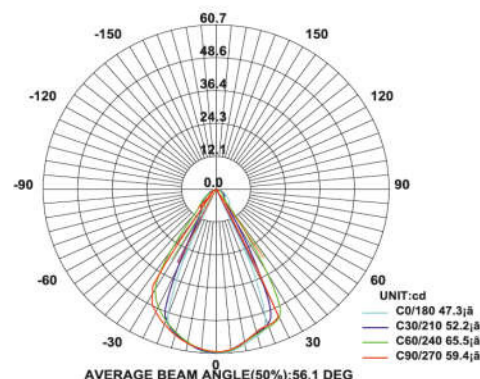


In wall Light **indoor**



Model: iLED 1 IWL CED 33001

PRODUCT DESCRIPTION

This recessed mount luminaires is in the range of 1 W. Universal power supply/drivers with input range of 24 V AC-DC , 90 V to 305 V AC,50/60 HZ and PF >0.95. The material used is Abs plastic with glass. It is ideal for bedroom, passages, corridors etc.

Different fixture colours available on request.

SPECIFICATION

Material	: Abs plastic with glass
Lumen Efficacy	: 160 – 180 lumens
Mounting	: Inwall / 2-way switch box
Power	: 1 W
Voltage	: 24 V AC-DC , 90 V to 305 V AC ,50/60 HZ
Power Factor	: >0.95
LED colors	: White 6000-6400 K Neutral White 4000-4500 K Warm White 2700-3000 K
Lumen Flux	: 120-140 lm/W
Dimension	: L-94 X W-94 X H-32 mm
Cut out dimension	:L-83 X W-83 X H-23mm
Driver	:internal
Operating Temp	: -40°C ~ + 70°C
CRI	: >85
IP Rating	:IP 20
Led used	CREE ⇄
Dimmable Interface	C.A.S.A.M.B.I Colour tunable (2700 K – 6000 K), DALI, Edge pulse/0/1-10 V dimming control (optional)

ORDERING INFORMATION

iLED	1	IWL	33001	W	WW	NW
Brand name	Rated Power	In wall light	Model No.	White	Warm White	Neutral White

The technical specifications may vary due to continuous improvement without prior notice.

*Logos of products and companies are used for reference

www.iled.in

iLED Lighting Systems Pvt Ltd
Chennai - 600096, Tamil Nadu, India