


Facade/Projection Lights

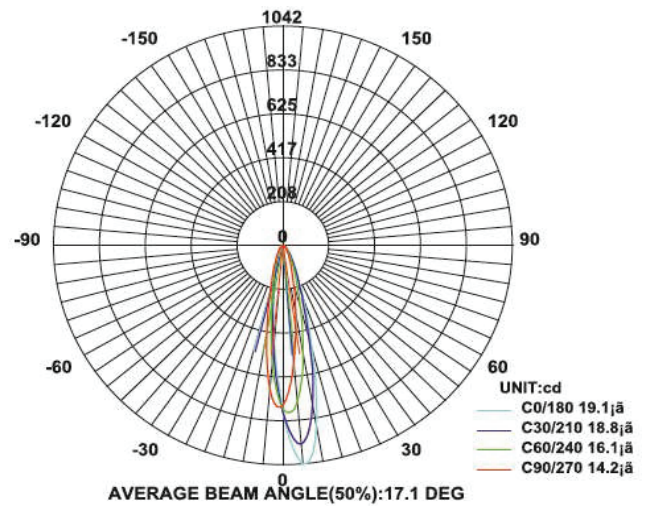

Model : iLED 10-15 OL 670014


PRODUCT DESCRIPTION

The Facade/Projection luminaires are in the range of 10/15W. Universal power supply/drivers with input range of 90 V to 305 V AC 50/60 Hz and PF >0.95. The material used is Ventilated powder coated die cast aluminum with tempered glass & reflector.It is ideal for sign, Bulding facade, accent, general security lighting etc. Different fixture colours available on request.

SPECIFICATION

Material : Ventilated powder coated Die cast Aluminum With tempered glass & lens
 Mounting : Surface Mount
 Lumen flux : 1300-1000 / 1950-1500 Lm
 Rated Power : 10/15W
 Color : WW/WW/NW
 Dimesion : D-79 X H-116 mm
 IP Rating : IP65
 Driver : Internal
 Operating Temp : -40°C~ + 70°C
 CRI : 80

BEAM ANGLE

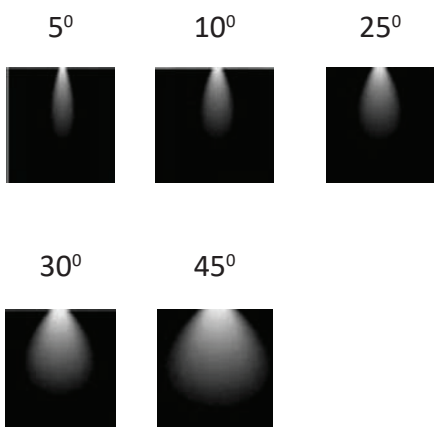

ORDERING INFORMATION

iLED	10/15	OL	670014	W	WW	NW
------	-------	----	--------	---	----	----

Brand Name Rated Power Outdoor Light Model No. White Warm White Neutral White

www.iled.in
 iLED Lighting Systems Pvt Ltd
 Chennai-600096, Tamil Nadu, India