
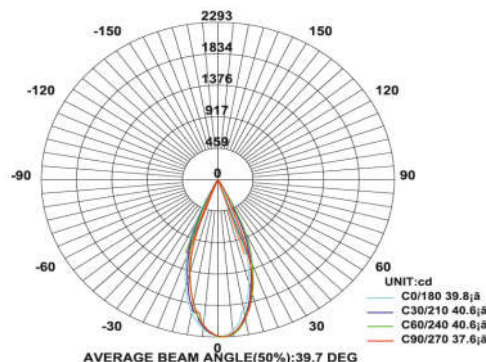


Front Removable Fitting Frame (FR Series)

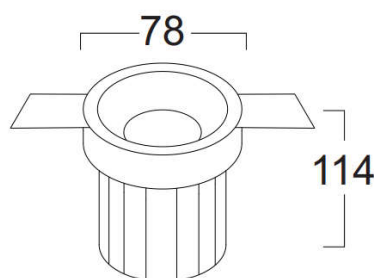

Model: iLED 10 RDL COB FR 33002


PRODUCT DESCRIPTION

The FR series TRIM LESS Front removable recess mount Luminaire ideal, with out damaging the ceiling are made of aluminium and available in 10 W – 24W


Universal power supply/drivers with input range of 90 V to 270 V AC 50/60 Hz and PF >0.96 are provided. It is ideal for hotel, showroom, office, auditorium & etc.

Different fixture colours available on request.

SPECIFICATION

Material	: Ventilated aluminum cooling with polished reflector and glass
Mounting	: Recess mount - Trimless
Power	: 10 W
Voltage	: 90 – 270 V AC 50/60 Hz
Power Factor	: >0.96
LED colors	: White 6000-6400 K Neutral White 4000-4500 K Warm White 2700-3000 K
Lumen Flux	: 120-140 lm/W (lumen efficacy: 160 -180 lm)
Dimension	: D-82 X H-115 mm
Cut out diameter	: 83 mm
Driver	: External
Operating Temp	: -40°C ~ + 70°C
CRI	: 85
IP Rating	: IP 20
Led used	: CREE 
Dimmable Interface	: CASAMBI , Colour tunable (2700 K – 6000 K), DALI, Edge pulse/0/1-10 V dimming control (optional)

BEAM ANGLE

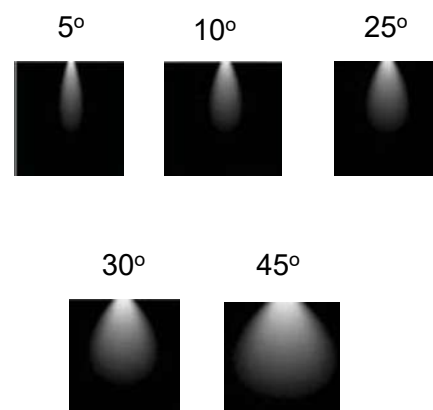

VARIANTS

MODEL	RATED POWER	DIMENSION
iLED 15 RDL COB FR 03	15 W	D-78 X H-115 mm
iLED 20 RDL COB FR 04	20 W	D-78 X H-115 mm

ORDERING INFORMATION

iLED	10	RDL	33002	W	WW	NW
Brand name	Rated Power	Round Down Light	Model No.	White	Warm White	Neutral White

The technical specifications may vary due to continuous improvement without prior notice.

*Logos of products and companies are used for reference

www.iled.in

iLED Lighting Systems Pvt Ltd
Chennai - 600096, Tamil Nadu, India