


## Surface Mount Down Light

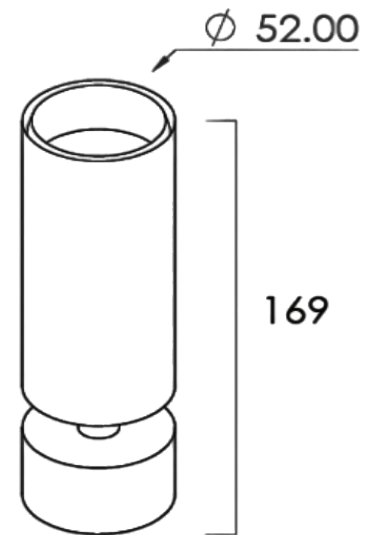

Model : iLED 10 SMRDL ADJUSTABLE 330047

### PRODUCT DESCRIPTION

This surface mount luminaire is in the range of 10W. Universal power supply/drivers with input range of 90 V to 305 VAC 50/60 Hz and PF >0.95. The material used is ventilated cooling aluminum with reflector & tempered glass. It is ideal for hotel, showroom, home, office, auditorium etc.

### SPECIFICATION

- Material : Ventilated cooling aluminum with reflector or lens
- Lumen Efficacy : 160 – 180 lumens
- Mounting : Surface mount
- Power : 10W
- Voltage : 90 – 305 VAC 50/60 Hz
- Power Factor : >0.95
- LED colors : White 6000-6400 K
- Neutral White 4000-4500 K
- Warm White 2700-3000 K
- Lumen Flux : 120-140 lm/W
- Light angle : 5°, 10°, 15°, 25°, 30°, 45° & 60°
- Dimension : D-52 X H-169 mm
- Driver : Internal
- Operating Temp : -40°C ~ + 70°C
- Application : Hotel, Show room, home, Office, Auditorium, Theatres.

### ORDERING INFORMATION

iLED	10	SMRDL	330047	W	WW	NW
Brand Name	Rated Power	Outdoor Light	Model No.	White	Warm White	Neutral White