


## Presence & Movement sensor light

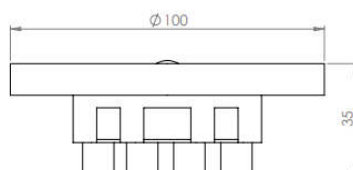


**Model:** iLED 100 PIR 33001

### PRODUCT DESCRIPTION

The presence & movement sensor luminaire is made of plastic housing with PIR sensor and it can be used upto 100 W. Universal power supply/drivers with input range of 90 V to 270 V AC, 50/60 Hz and PF >0.96. It is ideal for corridor, garage, balcony, warehouse, kitchen, cloakroom, storage, toilet, etc.

*Different fixture colours available on request.*

### SPECIFICATION

Material	: Plastic housing with PIR sensor
Mounting	: Recess mount
Duration	: 10 sec to 4 minutes adjustable
Detection range	: 180°
Power	: 100 W (customised designs available for higher wattaged )
Voltage	: 90 – 270 V AC, 50/60 Hz
Power Factor	: >0.96
Lux level	: 2-2000 lux adjustable
Dimension	: D-100 X H-35 mm
Cut out dimension	: L-45 XW-80 XH-12mm
Driver	: Internal
Operating Temp	: -40°C ~ + 70°C
CRI	: 85
IP Rating	: IP 20
Led used	: <b>CREE</b> 
Dimmable Interface	: <b>CASAMBI</b> , Colour tunable (2700 K – 6000 K), DALI, Edge pulse/0/1-10 V dimming control (optional)

### ORDERING INFORMATION

iLED	100	PIR	33001
Brand name	Rated Power	Passive Infrared	Model No.

The technical specifications may vary due to continuous improvement without prior notice.

\*Logos of products and companies are used for reference

[www.iled.in](http://www.iled.in)

iLED Lighting Systems Pvt Ltd  
Chennai - 600096, Tamil Nadu, India