
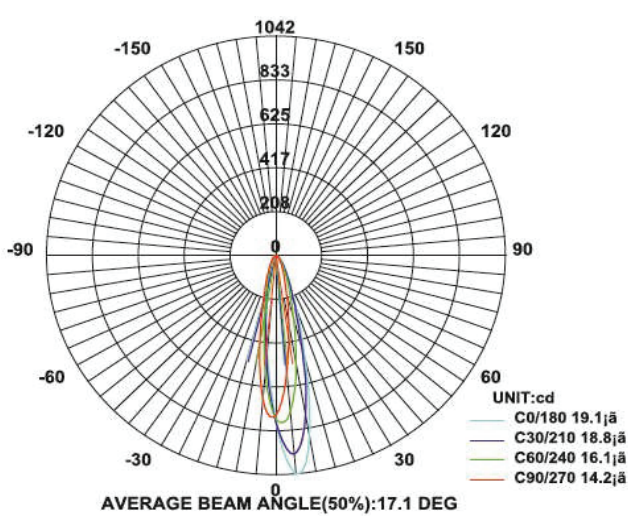


Facade/Projection Lights

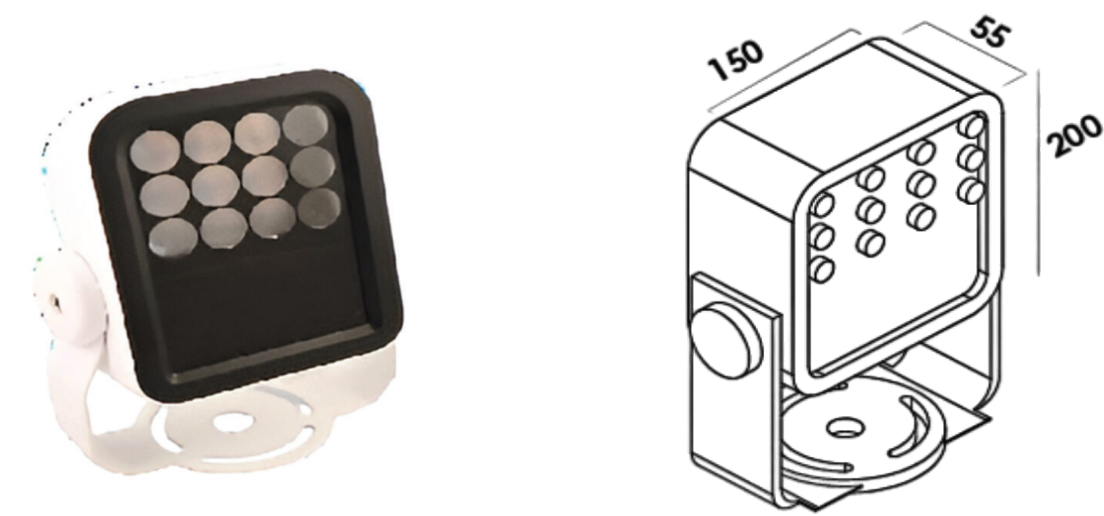

Model : iLED 12 OL 670011


PRODUCT DESCRIPTION

The Facade/Projection luminaires are in the range of 18w. Universal power supply/drivers with input range of 90 V to 305 V AC 50/60 Hz and PF >0.95. The material used is Ventilated powder coated die cast aluminum with tempered glass & reflector.It is ideal for sign, Bulding facade, accent, general security lighting etc.
Different fixture colours available on request.

SPECIFICATION

Material : Ventiled powder coated Die cast Aluminum
with tempered glass & lens
Mounting : Surface Mount
Lumen flux : 2340-1800Lm
Rated Power : 18W
Color : WW/WW/NW
Dimesion : L-150 x W-55 x H-200mm
IP Rating : IP65
Driver : Internal
Operating Temp : -40°c~ + 70°c
CRI : 85

BEAM ANGLE

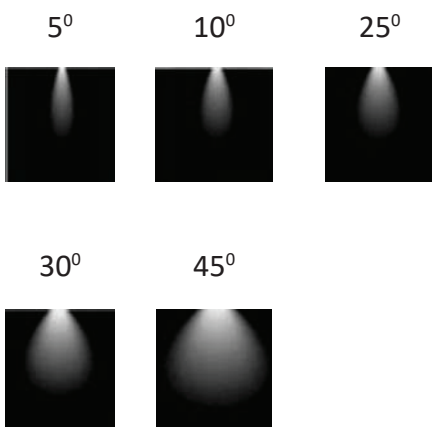

ORDERING INFORMATION

iLED	18	OL	670011	W	WW	NW
Brand Name	Rated Power	Outdoor Light	Model No.	White	Warm White	Neutral White

www.iled.in
iLED Lighting Systems Pvt Ltd
Chennai-600096, Tamil Nadu, India