
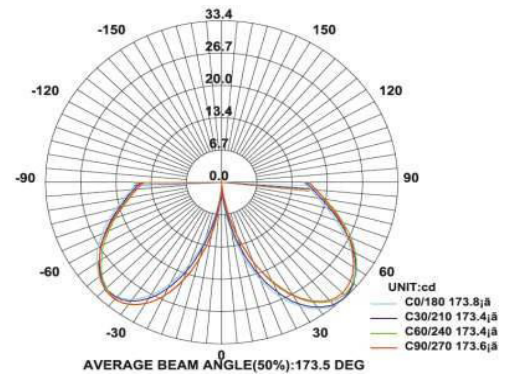


Bollards



Model: iLED 15+15 BD 670026 TWIN

PRODUCT DESCRIPTION

The bollard luminaire is made of extruded aluminium diecast and available in 10-30W. Universal power supply/drivers with input range of 90V to 270V AC 50/60Hz and PF >0.96 It is ideal for drive ways, pathway,gardens & etc. Different fixture colours available on request.

SPECIFICATION

Material	: Aluminium die cast with powder coat & tempered glass
Mounting	: Surface mount
Power	: 10-30W
Voltage	: 90 – 270V AC, 12/24 AC/DC
Power Factor	: >0.96
LED colors	: White 6000-6400K Neutral White 4000-4500 K Warm White 2700-3000K
Lumen Flux	: 120-140 lm/W (lumen efficacy: 160 -180 lm)
Dimension	: W-320 X H-1140 mm
Driver	: Internal
Operating Temp	: -40°C ~ + 70°C
CRI	: 85
IP Rating	: IP 67
Led used	: CREE ⇄
Dimmable (optional)	: CASAMBI , Colour tunable (2700K – 6000K), DALI, Edge pulse/0/1-10V dimming control

ORDERING INFORMATION

iLED	15+15	BD	670026	W	WW	NW
Brand name	Rated Power	Bollard	Model No.	White	Warm White	Neutral White