
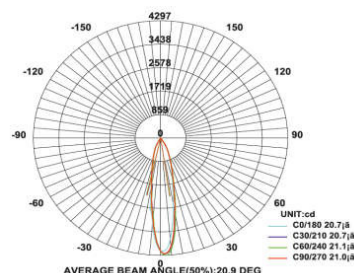


COB Gimbal Lights



Model: iLED 15 RGBL 330002, iLED 25 RGBL 33003


PRODUCT DESCRIPTION

The recessed mount luminaire is made of die cast aluminium and available in 15 W and 25 W. Universal power supply/drivers with input range of 90 V to 270 V AC 50/60 Hz and PF >0.96 are provided. It is ideal for hotel, showroom, home, office, theatres, auditorium, etc. *Different fixture colours available on request.*

SPECIFICATION

Material	: Aluminum alloy die casting
Mounting	: Recess mount
Power	: 15 W, 25 W
Voltage	: 90 – 270 V AC 50/60 Hz
Power Factor	: >0.96
LED colors	: White 6000-6400 K Neutral White 4000-4500 K Warm White 2700-3000 K
Lumen Flux	: 120-140 lm/W (lumen efficacy: 160 -180 lm)
Dimension	: D-130 X H-83 mm, D-170 X H-105 mm
Cut-out diameter	: D-108 mm, 148 mm
Driver	: External
Operating Temp	: -40°C ~ + 70°C
CRI	: 85
IP Rating	: IP 20
Led used	: CREE
Dimmable Interface	: CASAMBI , Colour tunable (2700 K – 6000 K), DALI, Edge pulse/0/1-10 V dimming control (optional)

BEAM ANGLE

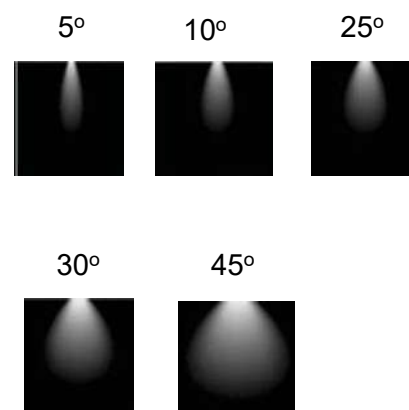

ORDERING INFORMATION

iLED	15	RGBL	33002	W	WW	NW
Brand name	Rated Power	Round Gimbal Light	Model No.	White	Warm White	Neutral White

The technical specifications may vary due to continuous improvement without prior notice.

*Logos of products and companies are used for reference

www.iled.in

iLED Lighting Systems Pvt Ltd
Chennai - 600096, Tamil Nadu, India