
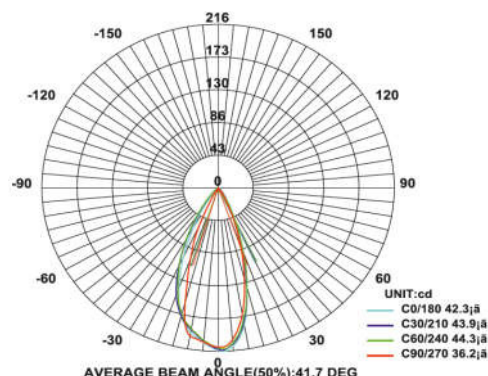


## Ceiling Recess Mount Lights With Lens



**Model:** iLED 1\*3 SDL 33009

### PRODUCT DESCRIPTION


The Ceiling recessed mount luminaire is made of aluminium with PMMA lens and available in 3 W with different angle reflector. It is ideal for hotel, showroom, home, offices, theaters etc.

*Different fixture colours available on request.*

### SPECIFICATION

|                    |                                                                                                              |
|--------------------|--------------------------------------------------------------------------------------------------------------|
| Material           | : Ventilated powder coated aluminum with different angle reflector                                           |
| Mounting           | : Recess mount with trim/trimless                                                                            |
| Power              | : 3 W                                                                                                        |
| Voltage            | : 12/24 V DC , 230 V AC                                                                                      |
| LED colors         | : White 6000-6400 K<br>Neutral White 4000-4500 K<br>Warm White 2700-3000 K                                   |
| Lumen Flux         | : 120-140 lm/W (lumen efficacy: 160 -180 lm)                                                                 |
| Dimension          | : L-45 X W-45 X H-49 mm                                                                                      |
| Cut out dimension  | : L-37 X W-37 X H-49 mm                                                                                      |
| Driver             | : External                                                                                                   |
| Operating Temp     | : -40°C ~ + 70°C                                                                                             |
| CRI                | : 85                                                                                                         |
| IP Rating          | : IP 20                                                                                                      |
| Led used           | : <b>CREE</b>                                                                                                |
| Dimmable Interface | : <b>CASAMBI</b> , Colour tunable (2700 K – 6000 K), DALI,<br>Edge pulse/0/1-10 V dimming control (optional) |

### BEAM ANGLE

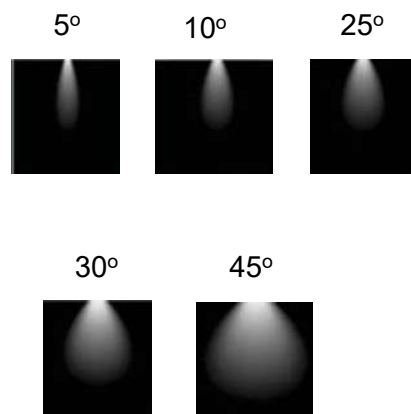

### ORDERING INFORMATION

|            |             |                   |           |       |            |               |
|------------|-------------|-------------------|-----------|-------|------------|---------------|
| iLED       | 3           | SDL               | 33009     | W     | WW         | NW            |
| Brand name | Rated Power | Square Down Light | Model No. | White | Warm White | Neutral White |

The technical specifications may vary due to continuous improvement without prior notice.

\*Logos of products and companies are used for reference

[www.iled.in](http://www.iled.in)

iLED Lighting Systems Pvt Ltd  
Chennai - 600096, Tamil Nadu, India