


Surface Mount Down Light

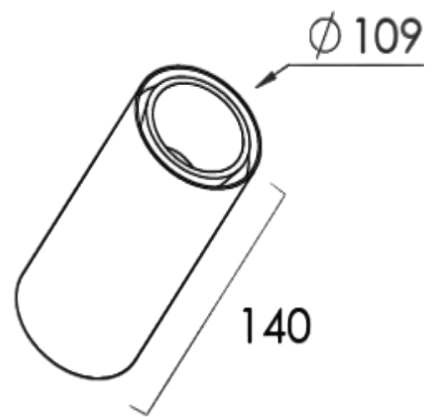

Model : iLED 20-22 SM RDL 330025

PRODUCT DESCRIPTION

This surface mount luminaire is in the range of 20-22W. Universal power supply/drivers with input range of 90 V to 305 VAC 50/60 Hz and PF >0.95. The material used is ventilated cooling aluminum with reflector & tempered glass.It is ideal for hotel, showroom, home, office, auditorium etc.

SPECIFICATION

- Material : Ventilated cooling aluminum with reflector or lens
- Lumen Efficacy : 2600-2000 / 2860-2200Lm
- Mounting : Surface mount
- Power : 20-22W
- LED colors : W/WW/NW
- Dimension : D-109 x H-140mm
- Cutout : 87mm
- Driver : Internal
- Operating Temp : -40°C ~ + 70°C
- Application : Hotel, Show room, home, Office, Auditorium, Theatres.

ORDERING INFORMATION

iLED	20-22W	SMRDL	330025	W	WW	NW
Brand Name	Rated Power	Outdoor Light	Model No.	White	Warm White	Neutral White