
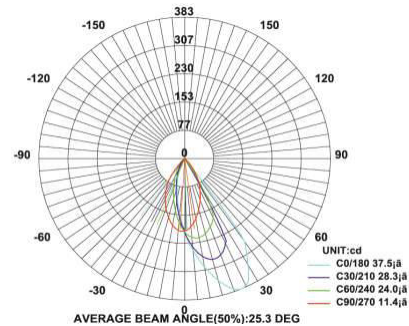


Bollards

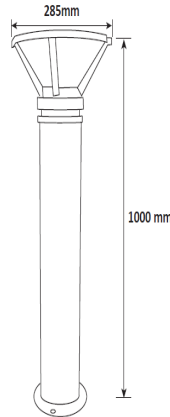

Model: iLED 20 BD 670027

PRODUCT DESCRIPTION

The bollard luminaire is made of extruded aluminium die cast and available in 15-25W. Universal power supply/drivers with input range of 90 V to 270 V AC 50/60 Hz and PF >0.96. It is ideal for drive ways, pathway, gardens etc. Different fixture colours available on request.

SPECIFICATION

Material	: Aluminium die cast with powder coat & tempered glass
Mounting	: Surface mount
Power	: 15-25 W
Voltage	: 90 – 270 V AC, 50/60 Hz/12-24V DC
Power Factor	: >0.96
LED colors	: White 6000-6400 K Neutral white 4000-4500 K Warm white 2700-3000 K
Lumen Flux	: 120-140 lm/W (lumen efficacy: 160 -180 lm)
Dimension	: D-285 X H-1000 mm
Driver	: Internal
Operating Temp	: -40°C ~ + 70°C
CRI	: >85
IP Rating	: IP 67
Led used	: CREE ⇄
Dimmable (optional)	: CASAMBI , Colour tunable (2700 K – 6000 K), DALI, Edge pulse/0/1-10 V dimming control

ORDERING INFORMATION

iLED	20	BD	670027	W	WW	NW
Brand name	Rated Power	Bollard	Model No.	White	Warm White	Neutral White