
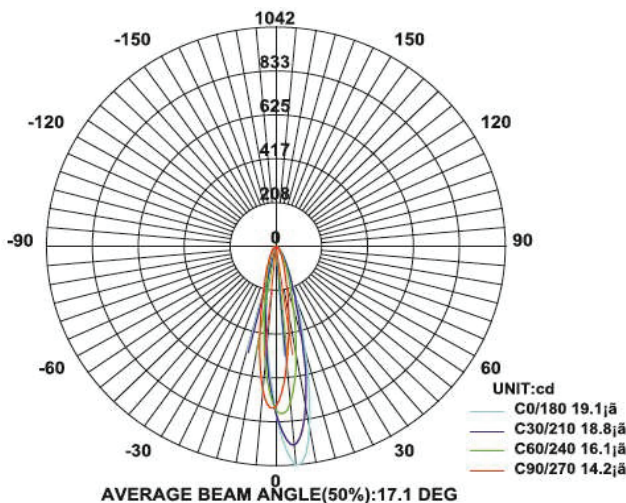


# Facade/Projection Lights

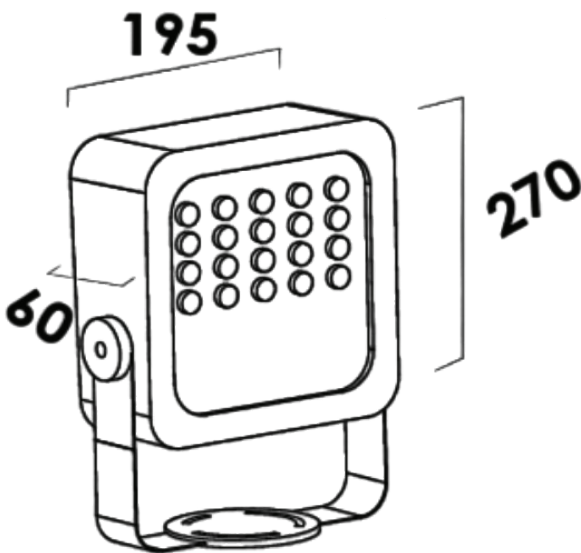

Model : iLED 24-36 OL 670012


## PRODUCT DESCRIPTION

The Facade/Projection luminaires are in the range of 36w. Universal power supply/drivers with input range of 90 V to 305 V AC 50/60 Hz and PF >0.95. The material used is Ventilated powder coated die cast aluminum with tempered glass & reflector.It is ideal for sign, Bulding facade, accent, general security lighting etc.  
Different fixture colours available on request.

## SPECIFICATION

Material : Ventiled powder coated Die cast Aluminum  
with tempered glass & lens  
Mounting : Surface Mount  
Lumen flux : 4680-3600Lm  
Rated Power : 36W  
Color : WW/WW/NW  
Dimesion : L-195XW-60XH-270mm  
IP Rating : IP65  
Driver : Internal  
Operating Temp : -40°c~ + 70°c  
CRI : 85

## BEAM ANGLE

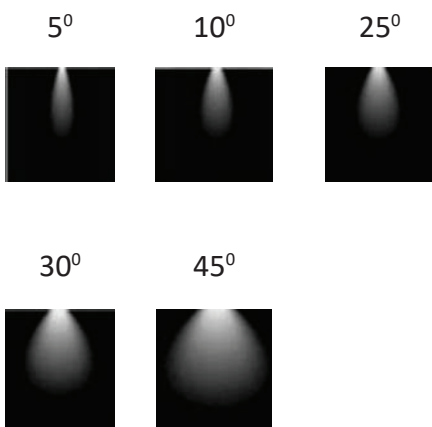

## ORDERING INFORMATION

iLED	36	OL	670012	W	WW	NW
Brand Name	Rated Power	Outdoor Light	Model No.	White	Warm White	Neutral White