


# INWALL LIGHT- OUTDOOR

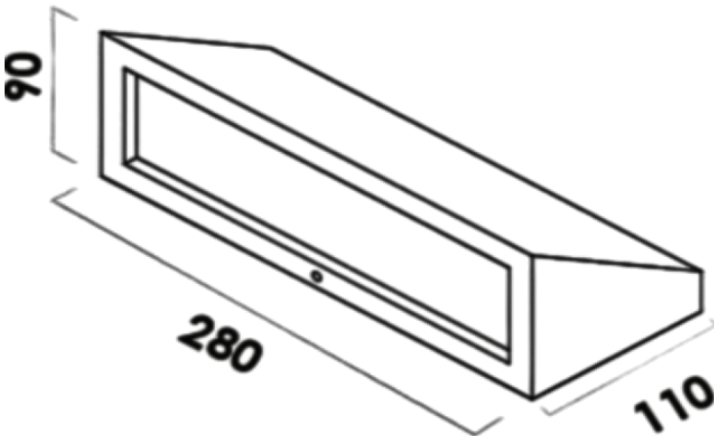

Model : iLED 24 IWL 670011

## PRODUCT DESCRIPTION

Lorem ipsum  
 The Facade/Projection luminaires are in the range of 24W Universal power supply/drivers with input range of 90 V to 305 V AC 50/60 Hz and PF >0.95. The material used is Ventilated powder coated die cast aluminum with tempered glass & reflector.It is ideal for sign, Bulding facade, accent, general security lighting etc.  
 Different fixture colours available on request.

## SPECIFICATION

Material : Aluminum Die Cast With Powder coated  
 Mounting : Inwall  
 Lumen flux : 3120-2400Lm  
 Rated Power : 24W  
 Color : WW/WW/NW  
 Dimesion : L-280XW-110XH-90mm  
 IP Rating : IP65  
 CRI : >80

## ORDERING INFORMATION

iLED	24W	IWL	670011	W	WW	NW
Brand Name	Rated Power	Outdoor Light	Model No.	White	Warm White	Neutral White