
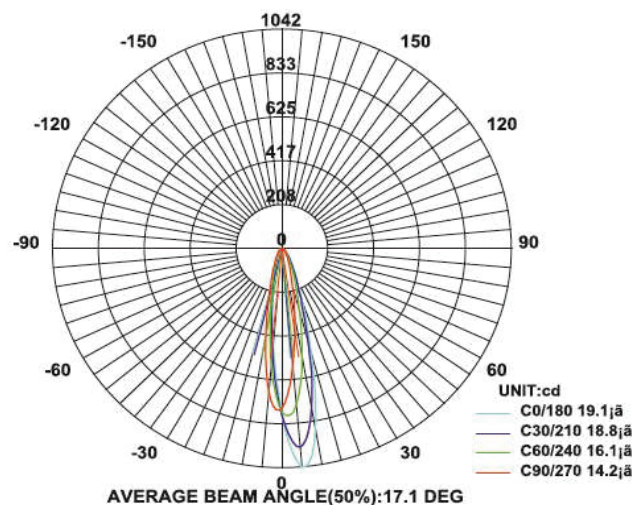


Facade/Projection Lights

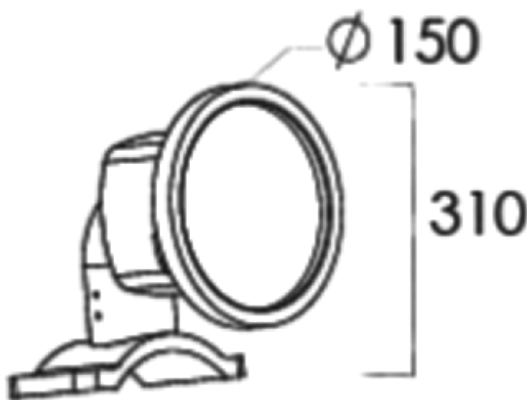

Model : iLED 24 OL 670013


PRODUCT DESCRIPTION

The Facade/Projection luminaires are in the range of 24w. Universal power supply/drivers with input range of 90 V to 305 V AC 50/60 Hz and PF >0.95. The material used is Ventilated powder coated die cast aluminum with tempered glass & reflector.It is ideal for sign, Bulding facade, accent, general security lighting etc. Different fixture colours available on request.

SPECIFICATION

Material : Ventiled powder coated Die cast Aluminum  
with Reflector & Clear Diffuser  
Mounting : Pole / Surface Mount  
Lumen flux : 3120-2400Lm  
Rated Power : 24W  
Color : WW/WW/NW  
Dimesion : D-310 X H-150 mm  
IP Rating : IP65  
Driver : Internal  
Operating Temp : -40°c~ + 70°c  
CRI : 80

BEAM ANGLE

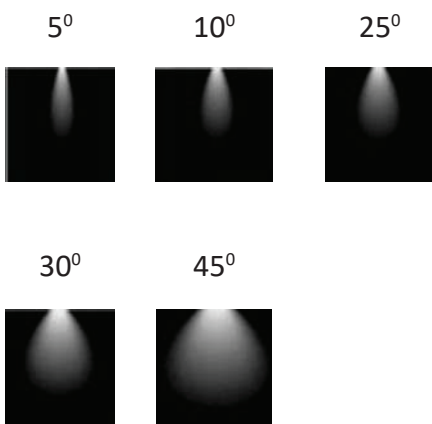

ORDERING INFORMATION

iLED	24	OL	670013	W	WW	NW
Brand Name	Rated Power	Outdoor Light	Model No.	White	Warm White	Neutral White