
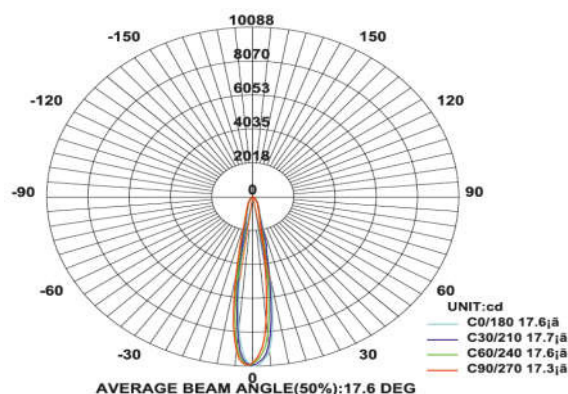


## Track Lights

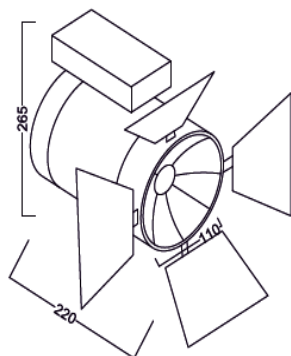

**Model:** iLED 24 TRL COB 33006


### PRODUCT DESCRIPTION

The track light luminaire is made of aluminium and it is available in the range of 10 W to 40 W. Universal power supply/drivers with input range of 90 V to 270 V AC 50/60 Hz and PF >0.96. It is ideal for hotel, apartments, textiles & jewellery etc. Different fixture colours available on request.

### SPECIFICATION

|                    |                                                                                                           |
|--------------------|-----------------------------------------------------------------------------------------------------------|
| Material           | : Powder coated aluminum with lens & toughened glass                                                      |
| Power              | : 24 W                                                                                                    |
| Voltage            | : 90 – 270 V AC 50/60 Hz                                                                                  |
| Power Factor       | : >0.96                                                                                                   |
| LED colors         | : White 6000-6400 K<br>Neutral White 4000-4500 K<br>Warm White 2700-3000 K                                |
| Lumen Flux         | : 120-140 lm/W (lumen efficacy: 160 -180 lm)                                                              |
| Dimension          | : L-220 X W-110 X H-265 mm                                                                                |
| Driver             | : Internal                                                                                                |
| Operating Temp     | : -40°C ~ + 70°C                                                                                          |
| CRI                | : 85                                                                                                      |
| IP Rating          | : IP 20                                                                                                   |
| Led used           | : <b>CREE</b> ⇄                                                                                           |
| Dimmable Interface | : <b>CASAMBI</b> , Colour tunable (2700 K – 6000 K), DALI, Edge pulse/0/1-10 V dimming control (optional) |

### BEAM ANGLE

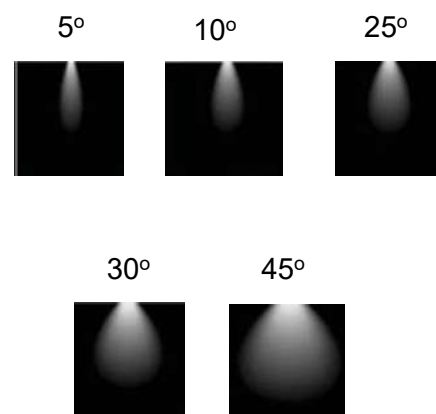

### ORDERING INFORMATION

|            |             |             |           |       |            |               |
|------------|-------------|-------------|-----------|-------|------------|---------------|
| iLED       | 24          | TRL         | 33006     | W     | WW         | NW            |
| Brand name | Rated Power | Track Light | Model No. | White | Warm White | Neutral White |

The technical specifications may vary due to continuous improvement without prior notice.

\*Logos of products and companies are used for reference

[www.iled.in](http://www.iled.in)

iLED Lighting Systems Pvt Ltd  
Chennai - 600096, Tamil Nadu, India