
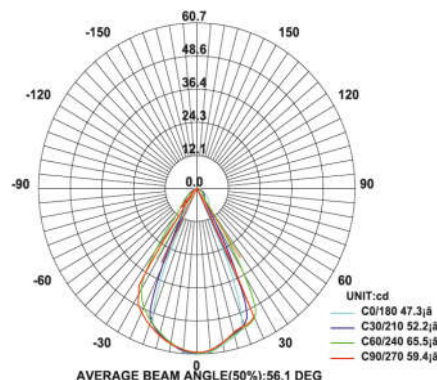


## Inwall Light indoor



**Model:** iLED 1/3 IWL CED 33002

### PRODUCT DESCRIPTION

This recessed mount luminaires is in the range of 1 W and 3W . Universal power supply/drivers with input range of 90 V to 305 V AC,50/60 HZ and PF >0.95. The material used is Aluminum die cast with powder coating. It is ideal for bedroom, stairs, passages, corridors etc.

*Different fixture colours available on request.*

### SPECIFICATION

Material	: Aluminum die cast with powder coating
Lumen Efficacy	: 160 – 180 lumens
Mounting	: In wall, Recess mount
Power	: 1W/ 3W
Voltage	: 90 V to 305 V AC , 50/60HZ
Power Factor	: >0.95
LED colors	: White 6000-6400 K Neutral White 4000-4500 K Warm White 2700-3000 K
Lumen Flux	: 120-140 lm/W
Dimension	: L-50 X W-50 X H-30 mm L-45 X W-45 X H-30mm
Cut out dimension	: L-29 X W-29 X H-28mm
Driver	: external
Operating Temp	: -40°C ~ + 70°C
CRI	: >85
IP Rating	: IP 20 (OPTIONAL IP65)
Led used	: <b>CREE</b> ⇄
Dimmable Interface	: <b>CAS</b> ▲ <b>MBI</b> , Colour tunable (2700 K – 6000 K), DALI, Edge pulse/0/1-10 V dimming control (optional)

### ORDERING INFORMATION

iLED	1/3	IWL	33002	W	WW	NW
Brand name	Rated Power	In wall light	Model No.	White	Warm White	Neutral White

The technical specifications may vary due to continuous improvement without prior notice.

\*Logos of products and companies are used for reference

[www.iled.in](http://www.iled.in)

iLED Lighting Systems Pvt Ltd  
Chennai - 600096, Tamil Nadu, India