
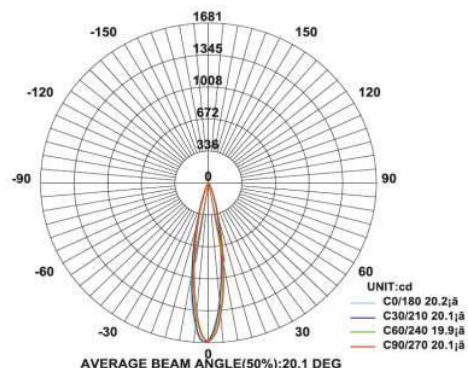


COB Down Lights



Model: iLED 3 RDL COB 330020


PRODUCT DESCRIPTION

The Ceiling recessed spot luminaire is made of Ventilated Aluminium with PMMA lens and available in 1W-3W. It is ideal for hotels, showrooms, homes, offices ,theaters etc. Different fixture colours available on request.

SPECIFICATION

Material	: Ventilated aluminum cooling with PMMA lens
Mounting	: Recess mount
Power	: 1-3W
Voltage	: 12/24 V DC , 230 V AC
LED colors	: White 6000-6400 K Neutral White 4000-4500 K Warm White 2700-3000 K
Lumen Flux	: 120-140 lm/W (lumen efficacy: 160 -180 lm)
Dimension	: D-39 X H-38 mm
Cut out diameter	: 29 mm
Driver	: External
Operating Temp	: -40°C ~ + 70°C
CRI	: >85
IP Rating	: IP 20
Led used	: CREE ⇄
Dimmable Interface	: CASAMBI , Colour tunable (2700 K – 6000 K), DALI, Edge pulse/0/1-10 V dimming control (optional)

BEAM ANGLE

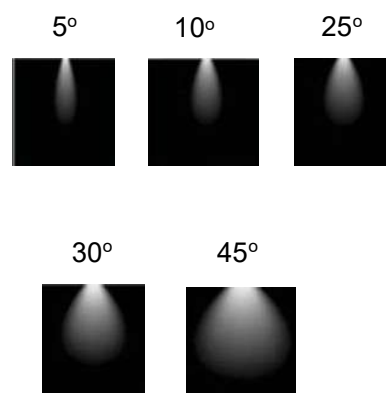

ORDERING INFORMATION

iLED	3	RDL	330020	W	WW	NW
Brand name	Rated Power	Round Down Light	Model No.	White	Warm White	Neutral White

The technical specifications may vary due to continuous improvement without prior notice.

*Logos of products and companies are used for reference

www.iled.in

iLED Lighting Systems Pvt Ltd
Chennai - 600096, Tamil Nadu, India