


Street Lights

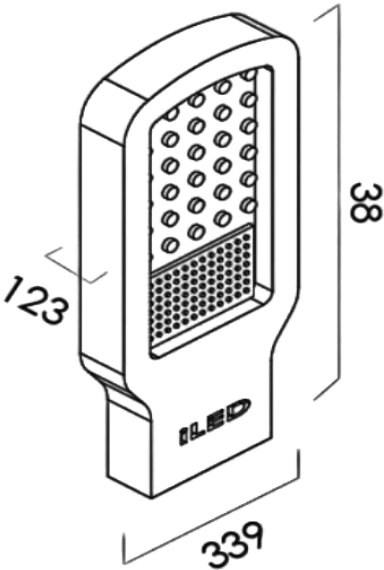

Model : iLED 30 ST SLM 08

PRODUCT DESCRIPTION

The Facade/Projection luminaires are in the range of 30W Universal power supply/drivers with input range of 90 V to 305 V AC 50/60 Hz and PF >0.95. The material used is Ventilated powder coated die cast aluminum with tempered glass & reflector.It is ideal for sign, Bulding facade, accent, general security lighting etc. Different fixture colours available on request.

SPECIFICATION

Material : Powder coated aluminum Die casting With PMMA lens (optional) & tempered glass
 Mounting : Aluminum / GI pole
 Rated Power : 30W
 Lumen flux : 3900-3000Lm
 Color : WW/WW/NW
 Dimesion : L-339XW-123XH-38mm
 CRI : >80
 IP Rating : IP65

ORDERING INFORMATION

iLED	30W	ST	08	W	WW	NW
Brand Name	Rated Power	Outdoor Light	Model No.	White	Warm White	Neutral White