
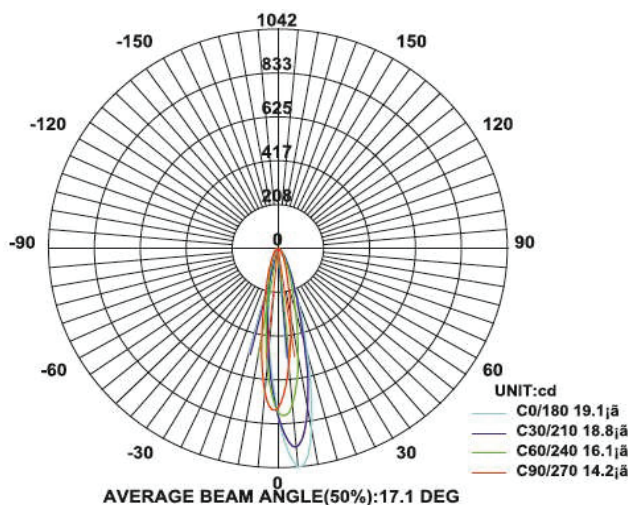


# Facade/Projection Lights

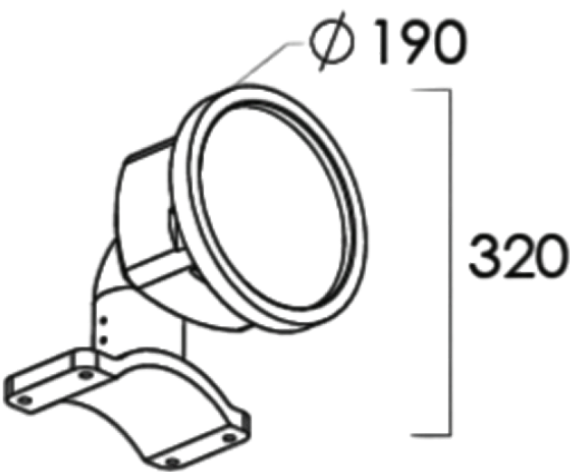

Model : iLED 36 OL 670014


## PRODUCT DESCRIPTION

The Facade/Projection luminaires are in the range of 36w. Universal power supply/drivers with input range of 90 V to 305 V AC 50/60 Hz and PF >0.95. The material used is Ventilated powder coated die cast aluminum with tempered glass & reflector.It is ideal for sign, Bulding facade, accent, general security lighting etc.  
Different fixture colours available on request.

## SPECIFICATION

Material : Ventiled powder coated Die cast Aluminum  
with Reflector & Clear Diffuser  
Mounting : Pole / Surface Mount  
Lumen flux : 4680-3600Lm  
Rated Power : 36W  
Color : WW/WW/NW  
Dimesion : D-190 X H-320 mm  
IP Rating : IP65  
Driver : Internal  
Operating Temp : -40°C~ + 70°C  
CRI : 80

## BEAM ANGLE

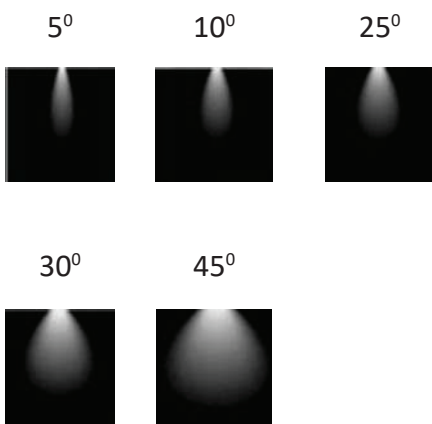

## ORDERING INFORMATION

iLED	36	OL	670014	W	WW	NW
Brand Name	Rated Power	Outdoor Light	Model No.	White	Warm White	Neutral White