
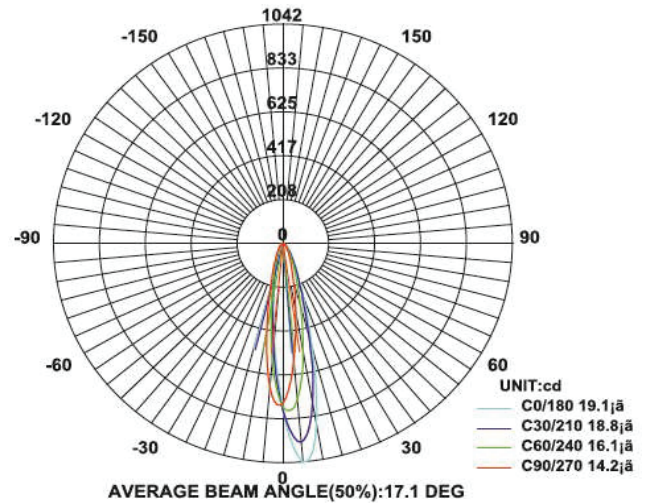


Facade/Projection Lights

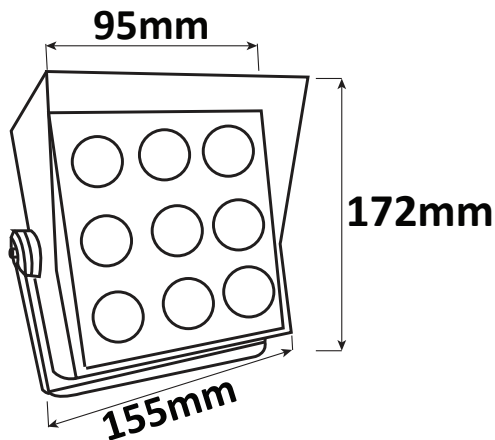

Model : iLED 3*9 OL 670021 - NARROW BEAM WW


PRODUCT DESCRIPTION

The Facade/Projection luminaires are in the range of 3X9W. Universal power supply/drivers with input range of 90 V to 305 V AC 50/60 Hz and PF >0.95. The material used is Ventilated powder coated die cast aluminum with tempered glass & reflector.It is ideal for sign, Bulding facade, accent, general security lighting etc. Different fixture colours available on request.

SPECIFICATION

Material : Diecast Aluminum With Narrow Beam Lens
 Mounting : Surface Mount
 Lumen flux : 360X3000/1080X900
 Rated Power : 3X9W
 Color : WW
 Dimesion : W-95xH-172XL-155mm
 IP Rating : IP65
 Driver : Internal
 Operating Temp : -40°C~ + 70°C
 CRI : 80

BEAM ANGLE

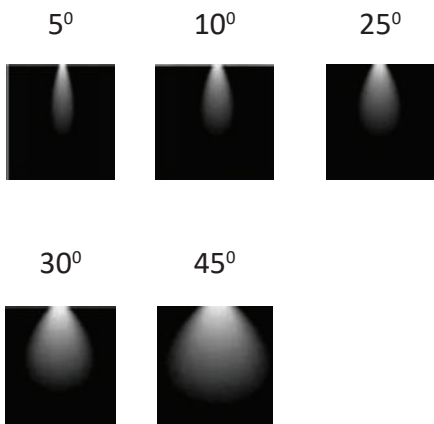

ORDERING INFORMATION

iLED	3x9	OL	670021	WW
------	-----	----	--------	----

Brand Name	Rated Power	Outdoor Light	Model No.	Warm White
------------	-------------	---------------	-----------	------------