
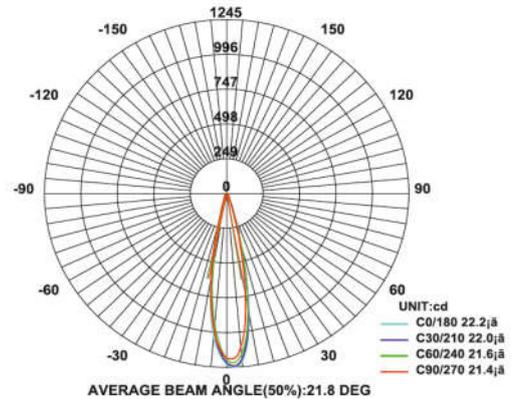


Burials & Pathway Lights



Model: iLED 4 UG 67008


PRODUCT DESCRIPTION

The outdoor burial mount luminaire is made of die cast aluminium with stainless steel top and available in 4 W. DC/Universal power supply/drivers with input range of 90 V to 270 V AC 50/60 Hz and PF >0.96. It is ideal for sign, facade area, accent and general lighting area etc. *Different fixture colours available on request.*

SPECIFICATION

| | |
|--------------------|---|
| Material | : Stainless steel top with ventilated powder coated die cast aluminum with tempered glass & lens |
| Mounting | : Outdoor burial mount |
| Power | : 4 W |
| Voltage | : 12 / 24 V AC/DC, 230V AC |
| Power Factor | : >0.96 |
| LED colors | : White 6000-6400 K Neutral White 4000-4500 K Warm White 2700-3000 K |
| Lumen Flux | : 120-140 lm/W (lumen efficacy: 160 -180 lm) |
| Dimension | : D-90 X H-120 mm |
| Cut-out Dimension | : D- 85 X H-118 mm |
| Driver | : Internal |
| Operating Temp | : -40°C ~ + 70°C |
| CRI | : 85 |
| IP Rating | : IP 67 |
| Led used | : CREE |
| Dimmable Interface | : CASAMBI , Colour tunable (2700 K – 6000 K), DALI, Edge pulse/0/1-10 V dimming control (optional) |

BEAM ANGLE

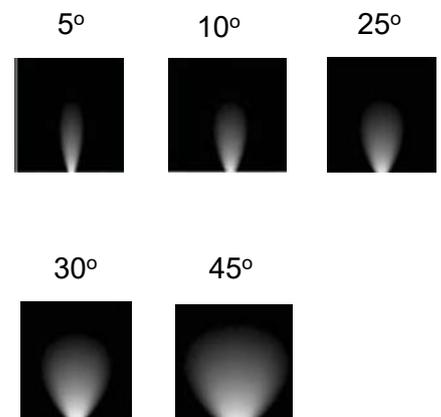

ORDERING INFORMATION

| | | | | | | |
|------------|-------------|--------------|-----------|-------|------------|---------------|
| iLED | 4 | UG | 67008 | W | WW | NW |
| Brand name | Rated Power | Under Ground | Model No. | White | Warm White | Neutral White |

The technical specifications may vary due to continuous improvement without prior notice.

*Logos of products and companies are used for reference

www.iled.in

iLED Lighting Systems Pvt Ltd
Chennai-600096, Tamil Nadu, India