


Super Market Light

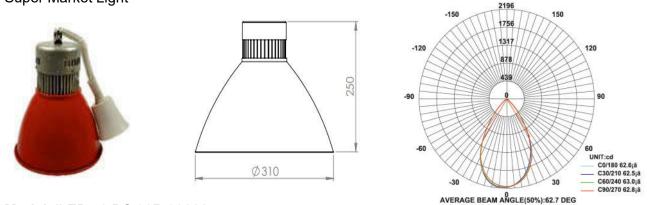

Model: iLED 50 DS 32R 33002


PRODUCT DESCRIPTION

The super market suspended/angular mount luminaires are in the range of 36 W, 40W and 50 W. Universal power supply/drivers with input range of 90 V to 305 V AC 50/60 Hz and PF >0.95 are provided. The material used is Extrution aluminum with reflective hood and milky diffuser. It is ideal for factory, warehouse, yard, super market RED MEET & etc. *Different fixture colours available on request.*

SPECIFICATION

Material Lumen Efficacy	: Extrution aluminum with reflective hood and milky diffuser : 160 – 180 lumens
Mounting	: Suspended
Power	: 50W
Voltage	: 90 V to 305 V AC 50/60 Hz
Power Factor	: >0.95
LED colors	: White 6000-6400 K
	Neutral White 4000-4500 K
	Warm White 2700-3000 K
Lumen Flux	: 120-140 lm/W
Dimension	: D-245 X H-260 mm
Driver	: Internal
Operating Temp	: -40°C ~ + 70°C
CRI	: 85
IP Rating	: IP 20
Led used	CREE 🚖
Dimmable Interface	CASAMBI, Colour tunable (2700 K – 6000 K), DALI, Edge pulse/0/1-10 V dimming control (optional)

ORDERING INFORMATION



The technical specifications may vary due to continuous improvement without prior notice.

*Logos of products and companies are used for reference

www.iled.in iLED Lighting Systems Pvt Ltd Chennai, Tamil Nadu, India 600096