
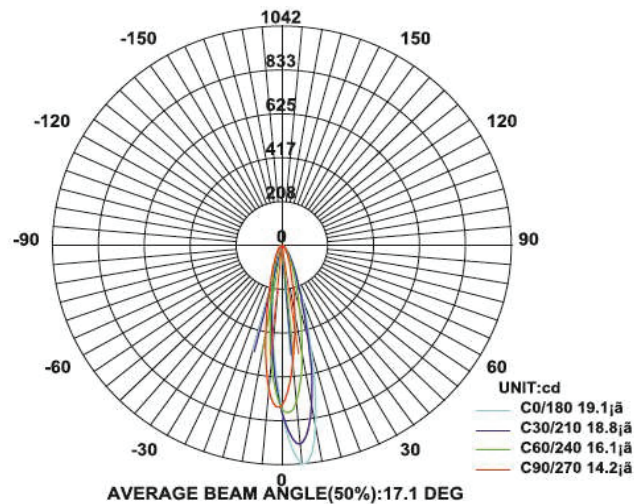


# Facade/Projection Lights

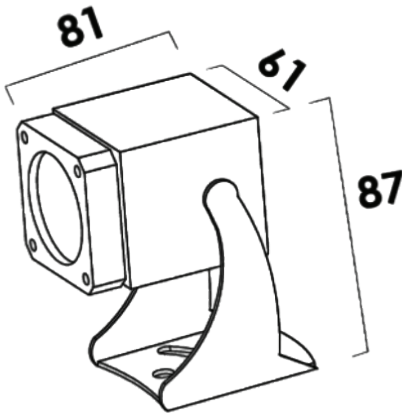

Model : iLED 7-10 OL 670016 SQR


## PRODUCT DESCRIPTION

The Facade/Projection luminaires are in the range of 7/10w. Universal power supply/drivers with input range of 90 V to 305 V AC 50/60 Hz and PF >0.95. The material used is Ventilated powder coated die cast aluminum with tempered glass & reflector.It is ideal for sign, Bulding facade, accent, general security lighting etc. Different fixture colours available on request.

## SPECIFICATION

Material : Ventilated powder coated Die cast Aluminum With tempered glass & lens  
 Mounting : Surface Mount  
 Lumen flux : 910-700 / 1300-1000Lm  
 Rated Power : 7/10W  
 Color : W/WW/NW  
 Dimesion : L-81 X W-61 X H-87 mm  
 IP Rating : IP65  
 Driver : Internal  
 Operating Temp : -40°C~ + 70°C  
 CRI : 80

## BEAM ANGLE

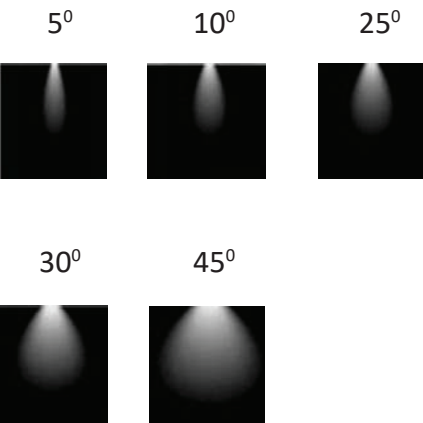

## ORDERING INFORMATION

iLED	7/10W	OL	670016	W	WW	NW
Brand Name	Rated Power	Outdoor Light	Model No.	White	Warm White	Neutral White

www.iled.in  
 iLED Lighting Systems Pvt Ltd  
 Chennai-600096 , Tamil Nadu, India