
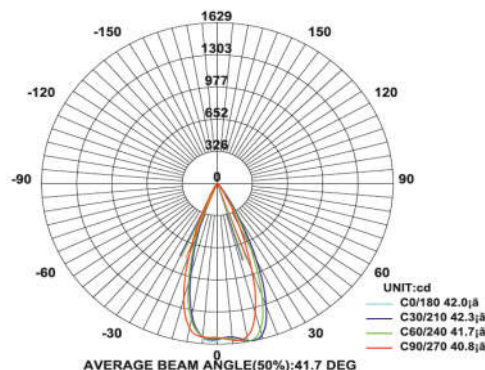


COB Gimbal Lights

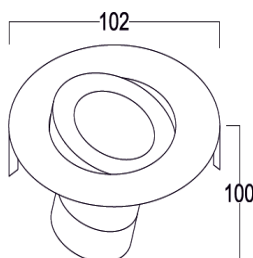


Model: iLED 8 RGBL 33001 - Front Removable/Retrofit

PRODUCT DESCRIPTION


The recessed mount luminaire is made of die cast aluminium front removable without disturbing the ceiling ring, does not damage POP ceiling and available in 8 W. Universal power supply/drivers with input range of 90 V to 270 V AC 50/60 Hz and PF >0.96. It is ideal for hotel, showroom, home, office, theatres, auditorium, etc.

Different fixture colours available on request.

SPECIFICATION

| | |
|--------------------|--|
| Material | : Aluminum alloy die casting |
| Mounting | : Recess mount |
| Power | : 8 W |
| Voltage | : 90 – 270 V AC 50/60 Hz |
| Power Factor | : >0.96 |
| LED colors | : White 6000-6400 K Neutral White 4000-4500 K Warm White 2700-3000 K |
| Lumen Flux | : 120-140 lm/W (lumen efficacy: 160 -180 lm) |
| Dimension | : D-102 X H-100 mm |
| Cut-out diameter | : D-86 mm |
| Driver | : External |
| Operating Temp | : -40°C ~ + 70°C |
| CRI | : 85 |
| IP Rating | : IP 20 |
| Led used | : CREE  |
| Dimmable Interface | : CASAMBI , Colour tunable (2700 K – 6000 K), DALI, Edge pulse/0/1-10 V dimming control (optional) |

BEAM ANGLE

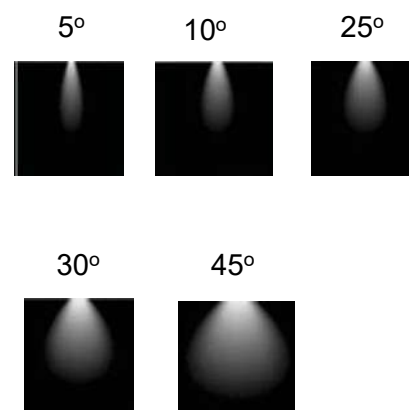

ORDERING INFORMATION

| | | | | | | |
|------------|-------------|--------------------|-----------|-------|------------|---------------|
| iLED | 8 | RGBL | 33001 | W | WW | NW |
| Brand name | Rated Power | Round Gimbal Light | Model No. | White | Warm White | Neutral White |

The technical specifications may vary due to continuous improvement without prior notice.

*Logos of products and companies are used for reference

www.iled.in

iLED Lighting Systems Pvt Ltd
Chennai - 600096, Tamil Nadu, India