
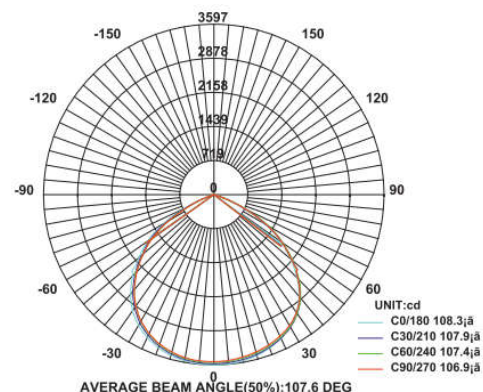


Hi Bay lights

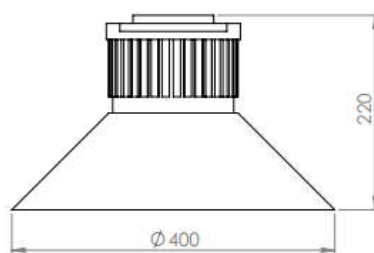


Model: iLED 80 HB 33002

PRODUCT DESCRIPTION

The hi bay luminaire is made Extrusion aluminium with reflective hood and milky diffuser. depending on the fixture size it is available in the range from 80W. Universal power supply/drivers with input range of 85 V to 270 V AC, 50/60 Hz and PF >0.96. It is ideal for factory, warehouse, yard, super market, conventional centre, etc.
Different fixture colours available on request.

SPECIFICATION

Material	: Extrusion aluminium with reflective hood & milky diffuser
Mounting	: Suspended
Power	: 80 W
Voltage	: 85 – 270 V AC 50/60 Hz
Power Factor	: >0.96
LED colors	: White 6000-6400 K Neutral White 4000-4500 K Warm White 2700-3000 K
Lumen Flux	: 120-140 lm/W (lumen efficacy: 160 -180 lm)
Dimension	: D-400 X H-220 mm(with clamp H-290)
Driver	: External
Operating Temp	: -40°C ~ + 70°C
CRI	: 85
IP Rating	: IP 67
Led used	: CREE 
Dimmable Interface	: CASAMBI , Colour tunable (2700 K – 6000 K), DALI, Edge pulse/0/1-10 V dimming control (optional)

VARIANTS

MODEL	RATED POWERS	DIMENSION
iLED 80 HB 33002	80 W	D-400XH-220 mm
iLED 120/150 HB 33003	120/150 W	D-450XH-250Mmm D-480XH-325(WITH CLAMP H-390)
iLED 180/200 HB 33004	180/200 W	D-330 X H-220 mm

ORDERING INFORMATION

iLED	80	HB	33002	W	WW	NW
Brand name	Rated Power	Hi Bay	Model No.	White	Warm White	Neutral White

The technical specifications may vary due to continuous improvement without prior notice.
 *Logos of products and companies are used for reference

www.iled.in
 iLED Lighting Systems Pvt Ltd
 Chennai - 600096, Tamil Nadu, India