



LIGHTS UNIVERSE

AUTOMATED PCB ASSEMBLY



JUKI PICK AND PLACE



8 ZONE REFLOW OVEN

PRODUCTION SHOP FLOOR



PRODUCTION ASSEMBLY LINE



3 AXIS AUTO SEALANT FILLING MACHINE



DRIVER ASSEMBLY




CNC LUMINARE OPERATIONS



LASER MARKING MACHINE

LM79 TESTING AND CERTIFICATION

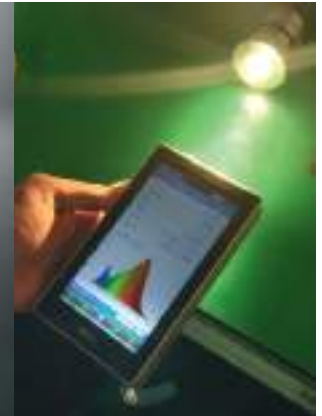

GONIO PHOTOMETRIC AND CCT TEST



DRIVER TESTING



AGING TEST



IP RATING / WATER
PROOF TESTING

INDEX

ARCHITECTURAL PROFILE LIGHTINGS



iLED AP 01 SURFACE / SUSPENSION

PAGE NO. - 001



iLED AP 01A - SURFACE / SUSPENSION

PAGE NO. - 001



iLED AP 02 - RECESS

PAGE NO. - 001



iLED AP 03-CORNER PROFILE

PAGE NO. - 001



iLED AP 04 - SURFACE / SUSPENSION - IP67

PAGE NO. - 002



iLED AP 06 - SURFACE / SUSPENSION

PAGE NO. - 002



iLED AP 07 - SHOWCASE PROFILE

PAGE NO. - 002



iLED AP 22-STEP

PAGE NO. - 002



iLED AP 25 - UNDERWATER - IP68

PAGE NO. - 003



iLED AP 32 - SURFACE / SUSPENSION

PAGE NO. - 003



iLED AP 33-FLOOR - IP67

PAGE NO. - 003



iLED AP 39-30 - CURTAIN

PAGE NO. - 003



iLED AP 45-CEILING

PAGE NO. - 004



iLED AP 49 - WALL MOUNT
(UP & DOWN LIGHT)

PAGE NO. - 004



iLED AP 52 - SUSPENSION

PAGE NO. - 004



iLED AP 114 - FLEXIBLE PROFILE

PAGE NO. - 004

NEW



iLED LS 30-8A - SUSPENSION

PAGE NO. - 005

LUXPRO®



iLED AP 068-R - TRIMLESS RECESS

PAGE NO. - 005



iLED AP 071 - TRIMLESS RECESS

PAGE NO. - 005

NEW



iLED AP 630 CUPBOARD ROD HANGER

PAGE NO. - 005

LUXPRO®



iLED AP 6244

PAGE NO. - 006

BOLLARDS



iLED 6 ST BD 01

PAGE NO. - 007



iLED 6 ST BD 02

PAGE NO. - 007



iLED 12 BD 9826 03

PAGE NO. - 007



iLED 12 BD 9830 04

PAGE NO. - 007



iLED 12 BD 05

PAGE NO. - 008



iLED BD 06

PAGE NO. - 008



iLED BD 07

PAGE NO. - 008



iLED BD 08

PAGE NO. - 008



iLED BD 09

PAGE NO. - 009



iLED BD 10

PAGE NO. - 009

INDEX

BOLLARDS

				
iLED BD 11	iLED 20 BD 12	iLED 7 BD 13	iLED 12 BD 14	iLED 7 BD 15
PAGE NO. - 009	PAGE NO. - 009	PAGE NO. - 010	PAGE NO. - 010	PAGE NO. - 010
				
iLED 12 BD 16	iLED 7 BD 17	iLED 12 BD 18	iLED 12 BD 19	iLED 12 BD 20
PAGE NO. - 010	PAGE NO. - 011	PAGE NO. - 011	PAGE NO. - 011	PAGE NO. - 011
				
iLED 12 / 20 BD 21	iLED 12 / 20 BD 22	iLED 12 / 20 BD 23		
PAGE NO. - 012	PAGE NO. - 012	PAGE NO. - 012		

BULBS

				
iLED 3 B 01	iLED 6 B 02	iLED 9 B 03	iLED 13 B 04	iLED 5 TCB 05
PAGE NO. - 013	PAGE NO. - 013	PAGE NO. - 013	PAGE NO. - 013	PAGE NO. - 014
				
iLED 8 TCB 06	iLED 10 TCB 07	iLED 12 TCB 08	iLED 6 PL 09	iLED 6 PL 10
PAGE NO. - 014	PAGE NO. - 014	PAGE NO. - 014	PAGE NO. - 015	PAGE NO. - 015
				
LED 5 CB 11	iLED 7 CB 12			
PAGE NO. - 015	PAGE NO. - 015			

BURIALS & PATHWAY LIGHTS

				
iLED 3 UG 01	iLED 3 UG 02	iLED 3 PWL 03 - ONE WAY	iLED 3 PWL 04 - TWO WAY	iLED 3 PWL 05 - THREE WAY
PAGE NO. - 016	PAGE NO. - 016	PAGE NO. - 016	PAGE NO. - 016	PAGE NO. - 017

INDEX

BURIALS & PATHWAY LIGHTS

				
iLED 3 PWL 06 - FOUR WAY	iLED 3 / 9 PWL 07 - FOUR WAY	iLED 4 UG 08	iLED 6 UG 09	iLED 12 UG 10
PAGE NO. - 017	PAGE NO. - 017	PAGE NO. - 017	PAGE NO. - 018	PAGE NO. - 018
				
iLED 20/24 UG 11	iLED 30/40 UG 12	iLED 15 UG 13-ANTIGLARE	iLED 25 UG 14-ANTIGLARE	iLED 6 UG 15 - NARROW BEAM
PAGE NO. - 018	PAGE NO. - 018	PAGE NO. - 019	PAGE NO. - 019	PAGE NO. - 019

CEILING RECESS MOUNT LIGHTS WITH LENS

				
iLED 1 RDL 01	iLED 3 RDL 02	iLED 3 RDL 03	iLED 3 RDL 04	iLED 3/6 RDL 05
PAGE NO. - 020	PAGE NO. - 020	PAGE NO. - 020	PAGE NO. - 021	PAGE NO. - 021
				
iLED 3/6 SDL 06	iLED 5 RDL 07	iLED 18 RDL 08	iLED 1*3 SDL 09	iLED 2*3 SDL 10
PAGE NO. - 021	PAGE NO. - 022	PAGE NO. - 022	PAGE NO. - 022	PAGE NO. - 023
				
iLED 5*3 SDL 11	iLED 10*3 SDL 12	iLED 15*3 SDL 13	iLED 1 RDL 14	iLED 1 RDL 15
PAGE NO. - 023	PAGE NO. - 023	PAGE NO. - 024	PAGE NO. - 024	PAGE NO. - 024
				
iLED 1 RDL 16	iLED 3 RDL 17			
PAGE NO. - 025	PAGE NO. - 025			

COB DOWN LIGHTS

				
iLED 4/6 RDL COB 01	iLED 6 SDL COB 02	iLED 12 RDL COB 03	iLED 12 SDL COB 04	iLED 18 RDL COB 05
PAGE NO. - 026	PAGE NO. - 026	PAGE NO. - 026	PAGE NO. - 026	PAGE NO. - 027

INDEX

COB DOWN LIGHTS

				
iLED 24 RDL COB 06	iLED 40 RDL COB 07	iLED 20/30 SDL COB 08	iLED 40/60 SDL COB 09	iLED 10 RDH COB 10 - DEEP DRAWN ADJ
PAGE NO. - 027	PAGE NO. - 027	PAGE NO. - 027	PAGE NO. - 028	PAGE NO. - 028
				
iLED 10 RDH COB 11 - DEEP DRAWN ADJ	iLED 15 RDH COB 12 - DEEP DRAWN ADJ	iLED 5 RDL NA COB 13 ECO	iLED 7 RDL NA COB 14 ECO	iLED 9 RDL NA COB 15 ECO
PAGE NO. - 028	PAGE NO. - 028	PAGE NO. - 029	PAGE NO. - 029	PAGE NO. - 029
				
iLED 12 RDL NA COB 16 ECO	iLED 15 RDL NA COB 17 ECO	iLED 18 RDL NA COB 18 ECO	iLED 10-12 RDL NA COB 19 - DEEP DRAWN	iLED 20-30 RDL NA COB 20 - DEEP DRAWN
PAGE NO. - 029	PAGE NO. - 030	PAGE NO. - 030	PAGE NO. - 030	PAGE NO. - 030
				
iLED 30-40 RDL NA COB 21 - DEEP DRAWN	iLED 40-50 RDL NA COB 22 - DEEP DRAWN	iLED 60-80 RDL NA COB 23 - DEEP DRAWN	iLED 07 RDH COB 24 ADJ	iLED 07 RDL NA COB 25
PAGE NO. - 031	PAGE NO. - 031	PAGE NO. - 031	PAGE NO. - 032	PAGE NO. - 032

COB GIMBAL LIGHTS

			
iLED 8 RGBL 01 - RETROFIT	iLED 15 RGBL 02	iLED 25 RGBL 03	iLED 25 RGBL 04
PAGE NO. - 033	PAGE NO. - 033	PAGE NO. - 033	PAGE NO. - 033

CONTROLLERS

				
iLED 4A3 RGB RF 01	iLED 4A3 RGB RF 02	iLED 6A3 RGB 308 RF 03	iLED 6A3 RGB 308 RF 04	iLED WIFI CONTROLLER 05 RGB / RGBW
PAGE NO. - 034	PAGE NO. - 034	PAGE NO. - 034	PAGE NO. - 034	PAGE NO. - 035
				
iLED WIFI CONTROLLER 06 RGB / RGBW	iLED 6A2 W+WW RF 07	iLED TOUCH DIMMER 08	iLED DIMMER 09	iLED DIML 1-7-168-IR 10
PAGE NO. - 035	PAGE NO. - 035	PAGE NO. - 035	PAGE NO. - 036	PAGE NO. - 036

INDEX

CONTROLLERS



iLED RP-307 11

PAGE NO. - 036



iLED DMX 512 ISOLATED SPLITTER-LT123

PAGE NO. - 036



iLED DMX 705 DECODER/ENCODER

PAGE NO. - 037



iLED 123 SIGNAL AMPLIFIER

PAGE NO. - 037



iLED DMX 800

PAGE NO. - 037

CORDLESS TABLE LAMPS (RECHARGEABLE)



iLED 2 EL 1EO 01 - RECHARGEABLE

PAGE NO. - 038



iLED 2 EL 1EG 02 - RECHARGEABLE

PAGE NO. - 038



iLED 2 EL 1EB 03 - RECHARGEABLE

PAGE NO. - 038



iLED 2 EL 1EH 04 - RECHARGEABLE

PAGE NO. - 039



iLED 1 CL 01 WW 05 - RECHARGEABLE

PAGE NO. - 039

CUPBOARD LIGHTS

NEW



iLED 5 CBL 01

PAGE NO. - 040

NEW



iLED 5 CBL 02

PAGE NO. - 040

NEW



iLED 10 CBL 03

PAGE NO. - 040

DRIVE OVER LIGHT

NEW

LUXPRO®



iLED 1 DOL 01

PAGE NO. - 041

NEW

LUXPRO®



iLED 1+1 DOL 02

PAGE NO. - 041

NEW

LUXPRO®



iLED 3 DOL 03

PAGE NO. - 041

NEW

LUXPRO®



iLED 3+3 DOL 04

PAGE NO. - 041

LED DRIVERS / POWER SUPPLY PAGE NO.152 - 153

FACADE / PROJECTION LIGHTS

NEW

LUXPRO®



iLED 10 OL 01

PAGE NO. - 042

NEW

LUXPRO®



iLED 20 OL 02

PAGE NO. - 042

NEW

LUXPRO®



iLED 30 OL 03

PAGE NO. - 042

NEW

LUXPRO®



iLED 40 OL 04

PAGE NO. - 042

NEW

LUXPRO®



iLED 50 OL 05

PAGE NO. - 043

NEW

LUXPRO®



iLED 12 / 18 OL 06

PAGE NO. - 043

NEW

LUXPRO®



iLED 24 / 36 OL 07

PAGE NO. - 043

NEW

LUXPRO®



iLED 45 / 60 OL 08

PAGE NO. - 043

NEW

LUXPRO®



iLED 80 OL 09

PAGE NO. - 044

NEW

LUXPRO®



iLED 6 U / D OD 10

PAGE NO. - 044

INDEX

FLOOD / FOCUS LIGHT



iLED 30 FL EC 001

PAGE NO. - 045



iLED 50 FL EC 002

PAGE NO. - 045



iLED 100 FL EC 003

PAGE NO. - 045



iLED 100 FL EC 003A

PAGE NO. - 045



iLED 150 FL EC 004

PAGE NO. - 046



iLED 200 FL EC 005

PAGE NO. - 046



iLED 300 FL EC 006

PAGE NO. - 046



iLED 450 FL EC 007

PAGE NO. - 046



iLED 18 FL 008

PAGE NO. - 047



iLED 40 FL 009

PAGE NO. - 047



iLED 40 FL 010

PAGE NO. - 047

FRONT REMOVABLE FITTING FRAME (FR SERIES)

NEW

LUXPRO®



iLED 12 RDL COB FR 01

PAGE NO. - 048

NEW

LUXPRO®



iLED 10 RDL COB FR 02

PAGE NO. - 048

NEW

LUXPRO®



iLED 15 RDL COB FR 03

PAGE NO. - 048

NEW

LUXPRO®



iLED 20 RDL COB FR 04

PAGE NO. - 049



iLED S-ZH093-Q -ANTI DAZZLE - FR SERIES

PAGE NO. - 049

NEW

LUXPRO®



iLED S-SCY105-Q -DEEP- FR SERIES

PAGE NO. - 049



iLED H-090F DEEP- FR SERIES

PAGE NO. - 050



iLED RRF 1007A - FR SERIES

PAGE NO. - 050



iLED RRF 001 - FR SERIES

PAGE NO. - 050



iLED RRHX001- FR SERIES

PAGE NO. - 051



iLED ST 502A

PAGE NO. - 051



iLED ST 503A - COB DOWNLIGHTS THIN FRAME

PAGE NO. - 051



iLED ST TS11 - COB DOWNLIGHTS THIN FRAME

PAGE NO. - 052



iLED 9 RRF W/WW

PAGE NO. - 052



iLED 2x9 RRF W/WW

PAGE NO. - 052

GARDEN POLE / STREET LIGHTS



iLED XJ6128 01

PAGE NO. - 053



iLED XJ6135 02

PAGE NO. - 053



iLED XJ6137 03

PAGE NO. - 053



iLED Street light Base 04

PAGE NO. - 053



iLED 30 PL 05

PAGE NO. - 054

INDEX

GARDEN POLE / STREET LIGHTS



iLED 30+20 PL 06

PAGE NO. - 054



iLED 30+10 PL 07

PAGE NO. - 054



iLED 60 PL 08

PAGE NO. - 054



iLED 30 PL 09

PAGE NO. - 055



iLED 36 PL 10

PAGE NO. - 055



iLED 30 PL 11

PAGE NO. - 055



iLED 30 PL 12

PAGE NO. - 055



iLED 36 PL 13

PAGE NO. - 056



iLED 50 PL 14

PAGE NO. - 056



iLED 60 PL 15

PAGE NO. - 056



iLED 30 PL 16

PAGE NO. - 056



iLED 30 PL 17

PAGE NO. - 057



iLED 80 PL 18

PAGE NO. - 057



iLED 80 PL 19

PAGE NO. - 057

GARDEN LIGHTS



iLED - 5 GL 01

PAGE NO. - 058



iLED - 8 GL 02

PAGE NO. - 058

NEW



LUXPRO®

iLED - 7 GL 03

PAGE NO. - 058



iLED - 10 GL 04

PAGE NO. - 058

NEW



LUXPRO®

iLED - 15 GL 05

PAGE NO. - 059



iLED 30/40 GL 06

PAGE NO. - 059



iLED 60/80 GL 07 - POST TOP LANTERN

PAGE NO. - 059



iLED 90/120 GL 08 - POST TOP LANTERN

PAGE NO. - 059



iLED 120 GL 09

PAGE NO. - 060



iLED 120/160 GL / ML 10 - POST TOP LANTERN

PAGE NO. - 060



iLED 40 GL 11

PAGE NO. - 060



iLED 80 GL 12

PAGE NO. - 060



iLED 100 GL 13

PAGE NO. - 061




iLED CLAMP FOR GL 11/12/13

PAGE NO. - 061

GYPSON LIGHTS - TRIMLESS

NEW

LUXPRO®



iLED GPL TD SF1001-01

PAGE NO. - 062

NEW

LUXPRO®



iLED GPL TD S2F1001-02

PAGE NO. - 062

NEW

LUXPRO®



iLED GPL TD S3F1001-03

PAGE NO. - 062

NEW

LUXPRO®



iLED GPL TH SY2002-04

PAGE NO. -063

NEW

LUXPRO®



iLED GPL TH S2Y2002-05

PAGE NO. -063

INDEX

GYP SUM LIGHTS - TRIMLESS

				
iLED GPL TD SF1004-06	iLED GPL TD S2F1004-07	iLED GPL TH SY3001-08	iLED GPL TH SY3002-09	iLED GPL TH SR3010-10
PAGE NO. - 063	PAGE NO. - 064	PAGE NO. - 064	PAGE NO. - 064	PAGE NO. - 065

				
iLED GPL TH SR3012-11	iLED GPL XQ SR3001-12	iLED GPL XQ SR4001-13	iLED GPL XQ SF1001-14	iLED GPL QJ SR2001-15
PAGE NO. - 065	PAGE NO. - 065	PAGE NO. - 066	PAGE NO. - 066	PAGE NO. - 066

		
iLED GPL QJ SR2002-16	iLED GPL QJ SR2003-17	iLED GPL QJ SY2001-18
PAGE NO. - 067	PAGE NO. - 067	PAGE NO. - 067

HI BAY LIGHTS

			
iLED 30 FL Black Eye 001	iLED 80 HB 002	iLED 120/150 HB 003	iLED 180/200 HB 004
PAGE NO. - 068	PAGE NO. - 068	PAGE NO. - 068	PAGE NO. - 068

SUPER MARKET LIGHTS

				
iLED 50 DS 21G 01	iLED 50 DS 32R 02	iLED 50 DS 41Y 03	iLED 36/40 TL T8 04 - TRI PROOF	iLED 40 TL T8 05 - TRI PROOF
PAGE NO. - 069	PAGE NO. - 069	PAGE NO. - 069	PAGE NO. - 069	PAGE NO. - 070


iLED 40 TL T8 06 - TRI PROOF
PAGE NO. - 070

INDEX

SPORTS LIGHTS / HI BAY LIGHTS ADJUSTABLE



iLED 80 HB/FL 01

PAGE NO. - 070



iLED 120 HB/FL 02

PAGE NO. - 071



iLED 160 HB/FL 03

PAGE NO. - 071

HOLOGRAPHIC ADVERTISING MACHINE



iLED 3D HOLOGRAPHIC FAN

PAGE NO. - 072



iLED GOBO LIGHT

PAGE NO. - 072

INTERACTIVE/DANCE FLOOR



iLED IA03-01

PAGE NO. - 073



iLED IA06-02

PAGE NO. - 073



iLED IA04-03

PAGE NO. - 073



iLED PIANO TILES 04

PAGE NO. - 073

INWALL LIGHTS INDOOR



iLED 1 IWL CED 01

PAGE NO. - 074



iLED 3 IWL CED 02

PAGE NO. - 074



iLED 1 / 3 IWL CED 03

PAGE NO. - 074



iLED 1 / 3 IWL CED 04

PAGE NO. - 074



iLED 3 / 5 IWL CED 05

PAGE NO. - 075

INWALL LIGHTS OUTDOOR



iLED 5 IWL 01 - IP65

PAGE NO. - 076



iLED 5 IWL 02 - IP65

PAGE NO. - 076



iLED 5 IWL CED 03 - IP65

PAGE NO. - 076



iLED 5 IWL CED 04 - IP65

PAGE NO. - 076

NEW



iLED 6 IWL 05 - IP65

PAGE NO. - 077



iLED 15 IWL 06 - IP65

PAGE NO. - 077



iLED 35 IWL 07 - IP65

PAGE NO. - 077



iLED 35 IWL 08 - IP65

PAGE NO. - 077



iLED 9 IWL 09 - IP65

PAGE NO. - 078

INDEX

JEWELLERY & SHOWCASE DISPLAY LIGHTING



iLED 1 JL 01

PAGE NO. - 078



iLED 1 SJL SQ 02

PAGE NO. - 078



iLED 3 RJL 03

PAGE NO. - 078



iLED 3 SJL 04

PAGE NO. - 079



iLED 5 JL 05

PAGE NO. - 079



iLED 24 JL 06

PAGE NO. - 079

MIRROR / PICTURE LIGHTS



iLED 8 ML 01

PAGE NO. - 080



iLED 12 ML 02

PAGE NO. - 080



iLED 8 ML 03

PAGE NO. - 080



iLED 8 ML 03

PAGE NO. - 080



iLED 8 ML 04

PAGE NO. - 081

NEON STRIP LIGHT

NEW



iLED 12 NL 01

PAGE NO. - 081


NEW



iLED 12 NL 02

PAGE NO. - 081

NEW



iLED 12 NL 03

PAGE NO. - 081

NEW



iLED 7 NL 04 & iLED 12 NL 05

PAGE NO. - 082

ACCESSORIES



iLED NLA 06 TO 18

PAGE NO. - 082

OUTDOOR COB DOWN LIGHTS

NEW



iLED 10 RDL NA COB IP67 01

PAGE NO. - 083

NEW



iLED 15 RDL NA COB IP67 02

PAGE NO. - 083

NEW



iLED 20 RDL NA COB IP67 03

PAGE NO. - 083

NEW



iLED 30 RDL NA COB IP67 04

PAGE NO. - 084

NEW



iLED 40 RDL NA COB IP67 05

PAGE NO. - 084

PANEL DOWN LIGHTS MILKY (BACK LIT)



iLED 10 PDL 01

PAGE NO. - 085



iLED 16 PDL 02

PAGE NO. - 085



iLED 24 PDL 03

PAGE NO. - 085



iLED 7 SQ PDL 04

PAGE NO. - 085



iLED 16 SQ PDL 05

PAGE NO. - 086

INDEX

PANEL DOWN LIGHTS MILKY (BACK LIT)



iLED 24 SQ PDL 06	iLED 6 PDL 3IN 1 07	iLED 12 PDL 3IN1 08	iLED 18 PDL 3IN 1 09	iLED LUMI PANEL FRAMELESS 10
PAGE NO. - 086	PAGE NO. - 086	PAGE NO. - 086	PAGE NO. - 087	PAGE NO. - 087

PANEL DOWN LIGHTS MILKY (EDGE LIT)



iLED 3 SLPDL RND 11	iLED 3 SLPDL SQ 12	iLED 6 SLPDL RND 13	iLED 6 SLPDL SQ 14	iLED 12 SLPDL RND 15
PAGE NO. - 087	PAGE NO. - 087	PAGE NO. - 088	PAGE NO. - 088	PAGE NO. - 088



iLED 12 SLPDL SQ 16	iLED 15 SLPDL RND 17	iLED 15 SLPDL SQ 18	iLED 18 SLPDL RND 19	iLED 18 SLPDL SQ 20
PAGE NO. - 088	PAGE NO. - 089	PAGE NO. - 089	PAGE NO. - 089	PAGE NO. - 089



iLED 22 SLPDL RND 21	iLED 22 SLPDL SQ 22	iLED 9 RDL 23	iLED 18 RDL 24 ECO
PAGE NO. - 090	PAGE NO. - 090	PAGE NO. - 090	PAGE NO. - 090

PRESENCE / MOVEMENT SENSOR LIGHTS



iLED 100 PIR 01	iLED 1000 PIR 02
PAGE NO. - 091	PAGE NO. - 091

ANTI STUMBLE LIGHTS



iLED 1.3 ASL 01
PAGE NO. - 091

INDEX

RECESS MOUNT CEILING DOWN LIGHTS (BACK LIT)



iLED 15/24 CDL 11 01	iLED 30 / 60 CDL 21 02	iLED 40 CDL 14 03	iLED 40 CDL 22 04 BACKLIT	iLED 50 CDL 22 05 EDGELIT
PAGE NO. - 092	PAGE NO. - 092	PAGE NO. - 092	PAGE NO. - 093	PAGE NO. - 093

RGB VIDEO TUBES



iLED 200-RGBA-01	iLED 200-RGBB-02	iLED 495-26 RGBB-03
PAGE NO. - 094	PAGE NO. - 094	PAGE NO. - 094

SIGNAGES



iLED 1 ES 01 SS G/RECO	iLED 1 ES 02 DS G/R-ECO	iLED 3 ES 03 G/R	iLED 3 ES 04 G/R/RGB
PAGE NO. - 095	PAGE NO. - 095	PAGE NO. - 095	PAGE NO. - 095

SOLAR STREET LIGHTS



iLED 15 Solar Street Light System S01	iLED 20 Solar Street Light System S02	iLED 40 Solar Street Light System S03	iLED Solar 60-70 Solar Street Light System S04	iLED 80-90 Solar Street Light System S05
PAGE NO. - 096	PAGE NO. - 096	PAGE NO. - 096	PAGE NO. - 096	PAGE NO. - 097



iLED 120 Solar Street Light System S06	iLED 150 Solar Street Light System S07	iLED 180 Solar Street Light System S08	iLED 20 Solar Street Light System S09	iLED 40 Solar Street Light System S10
PAGE NO. - 097	PAGE NO. - 097	PAGE NO. - 097	PAGE NO. - 097	PAGE NO. - 098



iLED 60 Solar Street Light System S11
PAGE NO. - 098

INDEX

SPOT LIGHTS & RETROFITS



iLED 4 MR16 01

PAGE NO. - 99



iLED 5 MR16 02

PAGE NO. - 99



iLED 6 MR16 03

PAGE NO. - 99



iLED 8 MR16 04

PAGE NO. - 99



iLED 8 MR16 COB 05

PAGE NO. - 100



iLED 12-15 AR 111 COB 06

PAGE NO. - 100



iLED 12 MR16 COB 07

PAGE NO. - 100



iLED 12 MR16 COB 08

PAGE NO. - 100



iLED 12 MR16 COB 09

PAGE NO. - 100



LUXPRO®



iLED 12 MR16 COB 10

PAGE NO. - 101



iLED 18 PLC 12

PAGE NO. - 101



iLED 24 PLC 13

PAGE NO. - 101

STAGE LIGHTS WITH DMX CONTROLLER



iLED 160 TH 226 - RGB PAR CAN

PAGE NO. - 102



iLED 120 TH 251 - PAR CAN

PAGE NO. - 102



iLED 150 TH 329 - LED PROFILE SPOT LIGHT

PAGE NO. - 102



iLED 180 TH 337 - LED PROFILE SPOT LIGHT

PAGE NO. - 103

STREET LIGHTS



iLED 14 ST 01

PAGE NO. - 104



iLED 20 / 30 / 45 / 60 / 90 ST 02

PAGE NO. - 104



iLED 40 ST 03

PAGE NO. - 104



iLED 60 ST 04

PAGE NO. - 105



iLED 60 ST 05

PAGE NO. - 105



iLED 80 ST 06

PAGE NO. - 105



iLED 36 ST 1711

PAGE NO. - 106



iLED 72 ST 1712

PAGE NO. - 106



iLED 108 ST 1713

PAGE NO. - 106



iLED 144 ST 1714

PAGE NO. - 106

INDEX

STRIP LIGHTS



iLED 6 STL 2835/60

PAGE NO. - 107



iLED 12 STL 2835/120 -

PAGE NO. - 107



iLED 16 STL 2835 / 120 OR iLED 5050 / 60

PAGE NO. - 107



iLED 20 STL 2835/168 -

PAGE NO. - 108



iLED 24 STL 2835/240 -

PAGE NO. - 108



iLED 44 STL 2835/360

PAGE NO. - 108

SURFACE MOUNT DOWN LIGHTS



iLED 3 SM RDL 01

PAGE NO. - 109



iLED 6 SM RDL 02 -3928

PAGE NO. - 109



iLED 10 SM RDL 03 - 3931

PAGE NO. - 109



iLED 15 SM RDL 04 - 3935

PAGE NO. - 109



iLED 20 SM RDL 05 - 3936

PAGE NO. - 110

SURFACE MOUNT DOWN LIGHTS



iLED 6 SM SDL 06 - 3955

PAGE NO. - 110



iLED 10 SM SDL 07-3956

PAGE NO. - 110



iLED 20 SM SDL 08-3956-1

PAGE NO. - 110



iLED 8 SM RDL 09

PAGE NO. - 111



iLED 8 SM SDL 10

PAGE NO. - 111



iLED 20 SM RDL 11

PAGE NO. - 111



iLED 20 SM SDL 12

PAGE NO. - 111



iLED 27 SM RDL 13

PAGE NO. - 112



iLED 27 SM SDL 14

PAGE NO. - 112



iLED 12 SM RDL 15 ECO

PAGE NO. - 112



iLED 18 SM RDL 16 ECO

PAGE NO. - 112




iLED 7/12/15 SM RDL 17

PAGE NO. - 113




iLED 12 SM SDL 18

PAGE NO. - 113



iLED SMDL D17 19

PAGE NO. - 113



iLED SMDL D35 20

PAGE NO. - 113

INDEX

SURFACE MOUNT DOWN LIGHTS



iLED 120 SMDL D70 21

PAGE NO. - 114



iLED 10 SM RDL 22 - FR SERIES

PAGE NO. - 114



iLED 15 SM RDL GP-M-5518-Q 23- FR SERIES

PAGE NO. - 114



Locking Rings - Q2

PAGE NO. - 114

SWIMMING POOL / FOUNTAIN LIGHTS




iLED 1 SWP 01

PAGE NO. - 115



iLED 1 SWP 02

PAGE NO. - 115



iLED 3 SWP 03

PAGE NO. - 115



iLED 3 SWP 04

PAGE NO. - 116



iLED 9 SWP 05

PAGE NO. - 116



iLED 18 SWP 06

PAGE NO. - 116



iLED 6 SWP 07

PAGE NO. - 117



iLED 12 SWP 08

PAGE NO. - 117



iLED 10 SWP 09

PAGE NO. - 117



iLED 12/24 SWP 10

PAGE NO. - 118



iLED 24 SWP 11

PAGE NO. - 118

NEW



LUXPRO

iLED 45/65 SWP 12

PAGE NO. - 118

TABLE LAMPS WITH BUILT IN BATTERY BACKUP



iLED 8082 Table Top/8062 Table CLIP Lamp 01

PAGE NO. - 119



iLED Wall Mount LED Lamp 02

PAGE NO. - 119



iLED UE 001 LED Desk Lamp 03

PAGE NO. - 119



Model:iLED UE 009 LED Desk Lamp 04

PAGE NO. - 119

TRACK LIGHTS



iLED 10 TRL 01

PAGE NO. - 120



iLED 12 TRL COB 02

PAGE NO. - 120



iLED 12 TRL COB 03

PAGE NO. - 120



iLED 15 TRL COB 04

PAGE NO. - 120



iLED 15+15 TRL COB 05

PAGE NO. - 121

INDEX

TRACK LIGHTS

				
iLED 24 TRL COB 06	iLED 30 TRL COB 07	iLED 8 TRL COB 08	iLED 12 TRL COB 09	iLED 24 TRL COB 10
PAGE NO. - 121	PAGE NO. - 121	PAGE NO. - 121	PAGE NO. - 122	PAGE NO. - 122
				
iLED 36 TRL COB 11	iLED 30 / 40 TRL COB 12	iLED 1M TRACK 01 3 Circuit 13	iLED 2M TRACK 02 3 Circuit 14	iLED 3M TRACK 02 3 Circuit 15
PAGE NO. - 122	PAGE NO. - 122	PAGE NO. - 123	PAGE NO. - 123	PAGE NO. - 123
				
iLED X-CONNECTOR 16	iLED I-CONNECTOR 17	iLED T-CONNECTOR 17	iLED L-CONNECTOR 18	
PAGE NO. - 123	PAGE NO. - 123	PAGE NO. - 124	PAGE NO. - 124	

TUBE LIGHTS

				
iLED 5 TL T5 01	iLED 10 TL T5 02	iLED 20 TL T5 03	iLED 20 / 24 TL T8 04	iLED 20 / 24 TL T8 05 - RETRO
PAGE NO. - 125	PAGE NO. - 125	PAGE NO. - 125	PAGE NO. - 125	PAGE NO. - 126

TUBE LIGHTS

			
iLED 40 / 48 TL T8 06	iLED 36/40 TL 07 - TRI PROOF IP67	iLED 40 TL 09 - TRI PROOF IP67	iLED 40 TL 08 - TRI PROOF IP67
PAGE NO. - 126	PAGE NO. - 126	PAGE NO. - 127	PAGE NO. - 127

VIDEO WALLS

				
iLED VIDEO ID PH 4 - 01	iLED VIDEO ID PH 6 - 02	iLED VIDEO ID PH 7.62 - 03	iLED VIDEO OD PH 10 - 04	iLED VIDEO OD PH 12 - 05
PAGE NO. - 128	PAGE NO. - 128	PAGE NO. - 128	PAGE NO. - 129	PAGE NO. - 129

INDEX

VIDEO WALLS

				
iLED VIDEO OD PH 14 - 06	iLED VIDEO OD PH 16 - 07	iLED VIDEO OD PH 20 - 08	iLED RUNNING DISPLAY P3 RGB	iLED RUNNING DISPLAY P4 RGB
PAGE NO. - 129	PAGE NO. - 130	PAGE NO. - 130	PAGE NO. - 130	PAGE NO. - 131

WALL LIGHTS - OUTDOOR

				
iLED 3 CWL OD 01	iLED 4 CWL OD 02	iLED 4 CWL OD 03	iLED CWL OD 04-without Light source	iLED CWL OD 05 -WITHOUT LIGHT SOURCE
PAGE NO. - 132	PAGE NO. - 132	PAGE NO. - 132	PAGE NO. - 132	PAGE NO. - 133
				
iLED CWL OD 06	iLED FD014 OD 07 ECO	iLED FD014 OD 08 ECO	iLED FD014 OD 09 ECO	iLED 5 U/D OD 10
PAGE NO. - 133	PAGE NO. - 133	PAGE NO. - 133	PAGE NO. - 134	PAGE NO. - 134
				
iLED 5+5 U&D OD 11	iLED 5 U / D OD 12	iLED 8 U / D OD 13	iLED 5 +5 U & D OD 14	iLED 8 +8 U & D OD 15
PAGE NO. - 134	PAGE NO. - 134	PAGE NO. - 135	PAGE NO. - 135	PAGE NO. - 135
				
iLED 12 U & D OD 16	iLED 5 U / D 8022 OD 17	iLED 3+3 U & D 8023 OD 18	iLED 3+3 U & D OD 19 - NARROW BEAM	iLED 6 U / D OD 20
PAGE NO. - 135	PAGE NO. - 136	PAGE NO. - 136	PAGE NO. - 136	PAGE NO. - 136

WALL LIGHTS - OUTDOOR

				
iLED 8 RL SM OD 21	iLED 12 RL SM OD 22	iLED 10 OD 23 - VERY NARROW BEAM	iLED 8 WL OD B815 24	iLED 8 WL OD B816 25
PAGE NO. - 137	PAGE NO. - 137	PAGE NO. - 137	PAGE NO. - 137	PAGE NO. - 138
				
iLED 6 WL OD B822 26	iLED 3+3 U&D OD B854 27	iLED 4+4 U & D OD 28	iLED 6+6 U & D OD 29	iLED 4*2 WL OD 30
PAGE NO. - 138	PAGE NO. - 138	PAGE NO. - 138	PAGE NO. - 139	PAGE NO. - 139

INDEX

WALL LIGHTS - OUTDOOR

				
iLED 6 SM OD 31 - 3928	iLED 10 SM OD 32 - 3931	iLED 15 SM OD 33 - 3935	iLED 20 SM OD 34 - 3936	iLED 6 SM OD 35 - 3955
PAGE NO. - 139	PAGE NO. - 139	PAGE NO. - 140	PAGE NO. - 140	PAGE NO. - 140
				
iLED 10 SM OD 36 - 3956	iLED 20 SM OD 37 - 3956	iLED 10 / 15 CWL 38	iLED 10 / 15 CWL 39	iLED 12 CWL 40
PAGE NO. - 140	PAGE NO. - 141	PAGE NO. - 141	PAGE NO. - 141	PAGE NO. - 141
				
iLED 6 U / D 41	iLED 6 RPL 152 - 42	iLED 30 WL OD 43	iLED 1 / 3 WDL 44	
PAGE NO. - 142	PAGE NO. - 142	PAGE NO. - 142	PAGE NO. - 142	

WALL WASHERS - OUTDOOR

				
iLED 10 WW 01	iLED 20 WW 02	iLED 20 WW 03	iLED 24 WW 04	iLED 36 WW 05
PAGE NO. - 143	PAGE NO. - 143	PAGE NO. - 143	PAGE NO. - 143	PAGE NO. - 144
				
iLED 72 WW 06	iLED 22/32 BSPL 07	iLED 30 WW 08	iLED 18 WW 09 RGB DMX	iLED 36 WW 10 RGB DMX
PAGE NO. - 144	PAGE NO. - 144	PAGE NO. - 144	PAGE NO. - 145	PAGE NO. - 145

WALL WASHERS

		
iLED 12 WW SM 11 WW (INDOOR)	iLED 12 WW RM 12 WW (INDOOR)	iLED 10 WW 13 WW (INDOOR)
PAGE NO. - 145	PAGE NO. - 145	PAGE NO. - 146

INDEX

WINDOW SILL / RAY LIGHT - OUTDOOR



iLED 8 RL RM 01

PAGE NO. - 146



iLED 8 RL SM OD 02

PAGE NO. - 146



iLED 12 RL SM OD 03

PAGE NO. - 146

3D LIGHTINGS



iLED 3D A16-01

PAGE NO. - 147



iLED 3D A08-02

PAGE NO. - 147



iLED 3D A03-03

PAGE NO. - 147



iLED 3D T10-04

PAGE NO. - 147



iLED 3D C04-05

PAGE NO. - 148



iLED 3D C08-06

PAGE NO. - 148



iLED 3D C06-07

PAGE NO. - 148



iLED 3D C05-08

PAGE NO. - 148



iLED 3D MC05-09

PAGE NO. - 149




iLED 3D C20-10

PAGE NO. - 149



iLED 3D C21-011

PAGE NO. - 149



iLED 3D C22-012

PAGE NO. - 149




iLED 3D H08-013

PAGE NO. - 150



iLED 3D H48-014

PAGE NO. - 150



iLED 3D H12-015

PAGE NO. - 150



Model:iLED 3D H32-016

PAGE NO. - 150




iLED 3D T05-017

PAGE NO. - 151



iLED 3D H16-018


PAGE NO. - 151

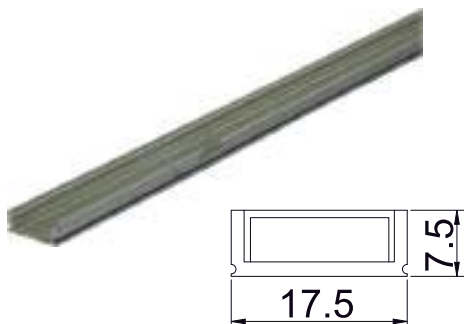

iLED AP 01 SURFACE / SUSPENSION

MATERIAL	Aluminum 6063 Matte Finish with PMMA Cover
MOUNTING	Aluminum mounted on Surface
RATED POWER	Depending on the required length
COLOR	W/WW/ NW
DIMENSION	W - 17.5 x H - 7.5 mm
APPLICATION	Surface Mount


Rs.250/mtr-

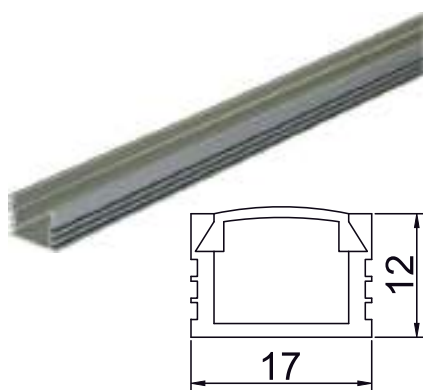

iLED AP 01A - SURFACE / SUSPENSION

MATERIAL	Aluminum 6063 Matte Finish with PMMA Cover
MOUNTING	Aluminum mounted on Surface
RATED POWER	Depending on the required length
COLOR	W/WW/ NW
DIMENSION	W - 17 x H - 12 mm
APPLICATION	Surface Mount


Rs.385/mtr-

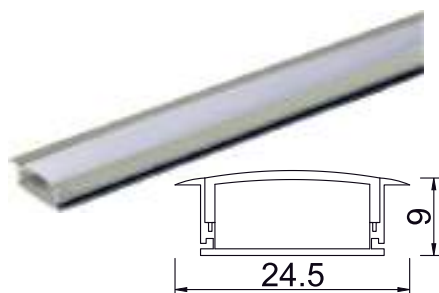

iLED AP 02 - RECESS

MATERIAL	Aluminum 6063 Matte Finish with PMMA Cover
MOUNTING	Aluminum mounted on Recess
RATED POWER	Depending on the required length
COLOR	W/WW/ NW
DIMENSION	W - 24.5 x H - 9 mm
APPLICATION	Recess Mount

Rs.270/mtr-

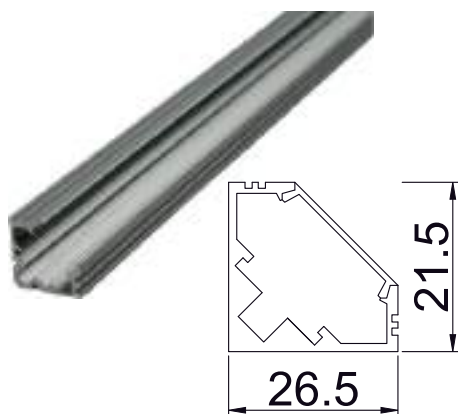

iLED AP 03-CORNER PROFILE

MATERIAL	Aluminum 6063 Matte Finish with PMMA Cover
MOUNTING	Aluminum mounted on corner
RATED POWER	Depending on the required length
COLOR	W/WW/ NW
DIMENSION	W-26.5 X H-21.5 mm
APPLICATION	Corner Mount


Rs.350/mtr-



iLED AP 04 - SURFACE / SUSPENSION - IP67

MATERIAL	Aluminum 6063 Matte Finish with PMMA Cover
MOUNTING	Aluminum mounted on Surface
RATED POWER	Depending on the required length
COLOR	W/WW/ NW
DIMENSION	W - 30.7 x H - 28.5 mm
APPLICATION	Surface Mount/Facade etc


Rs.850/mtr-

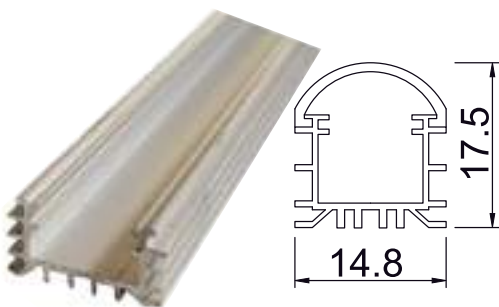

iLED AP 06 - SURFACE / SUSPENSION

MATERIAL	Aluminum 6063 Matte Finish with PMMA Cover
MOUNTING	Aluminum mounted on Surface
RATED POWER	Depending on the required length
COLOR	W/WW/ NW
DIMENSION	W-14.8 x H-17.5 mm
APPLICATION	Surface Mount


Rs.275/mtr-

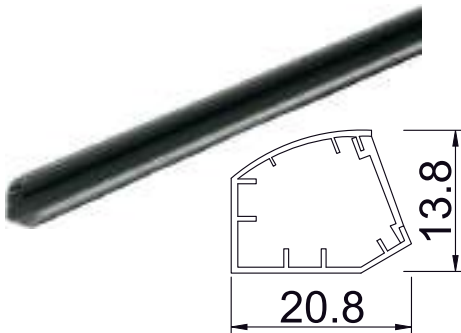

iLED AP 07 - SHOWCASE PROFILE

MATERIAL	Aluminum 6063 Matte Finish with PMMA Cover
MOUNTING	Aluminum mounted on Racks & cupboards
RATED POWER	Depending on the required length
COLOR	W/WW/ NW
DIMENSION	W - 20.8 x H - 13.8 mm
APPLICATION	Showcase, Racks & Cupboards


Rs.350/mtr-

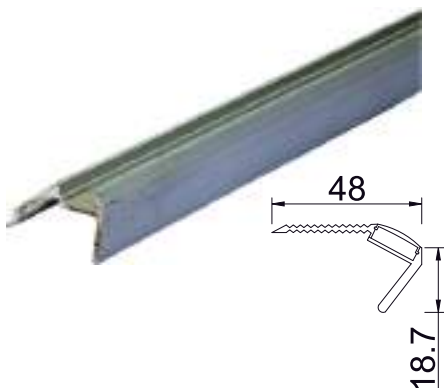

iLED AP 22-STEP

MATERIAL	Aluminum 6063 with PMMA opal matte diffuser, semi clear matte diffuser,
MOUNTING	Aluminum mounted on Surface of steps
RATED POWER	Depending on the required length
COLOR	W/WW/ NW
DIMENSION	W - 48 X H - 18.7 mm
APPLICATION	Staircase/Steps - Cinema Hall, Commercial Office, Hotel


Rs.1,200/mtr-

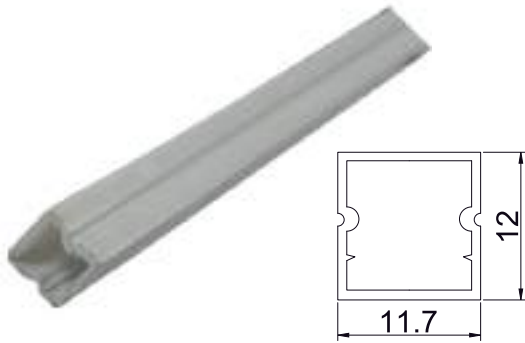

iLED AP 25 - UNDERWATER - IP68

MATERIAL	Waterproof led profile: I P68, Opal Matte PMMA + Lightdense PMMA
MOUNTING	PC mounted on Surface
RATED POWER	Depending on the required length
COLOR	W/WW/ NW
DIMENSION	W - 11.7 x H - 12 mm
APPLICATION	Floor Burial / Facade, IP68


Rs.780/mtr-

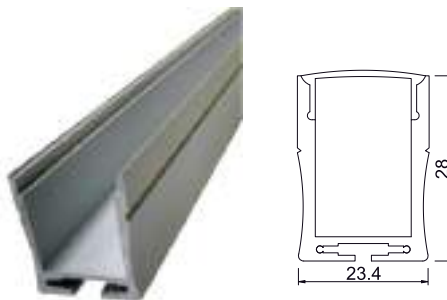

iLED AP 32 - SURFACE / SUSPENSION

MATERIAL	Aluminum 6063 Matte Finish with PMMA Cover
MOUNTING	Aluminum mounted on Surface / Suspension
RATED POWER	Depending on the required length
COLOR	W/WW/ NW
DIMENSION	W - 23.4 x H - 28 mm
APPLICATION	Surface Mount


Rs.969/mtr-

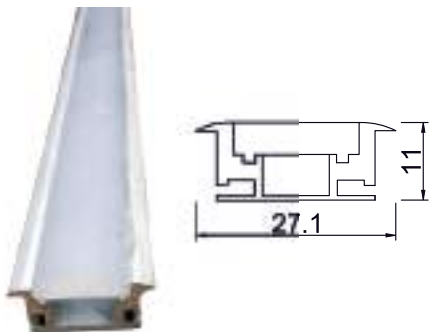

iLED AP 33-FLOOR - IP67

MATERIAL	Waterproof led Aluminum profile for floor, strong PC diffused cover, 3mm thickness
MOUNTING	Aluminum recess mounted on floor
RATED POWER	Depending on the required length
COLOR	W/WW/ NW
DIMENSION	W - 27.1 x H - 11 mm
APPLICATION	Floor Burial / IP 67

Rs.975/mtr-

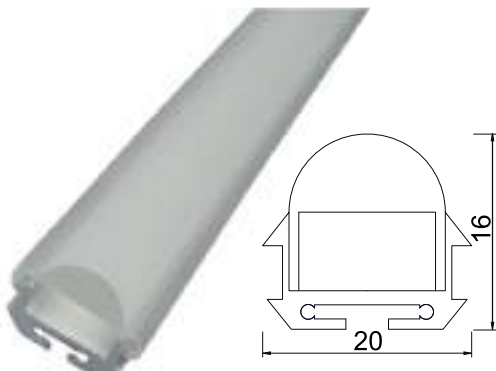


iLED AP 39-30 - CURTAIN

MATERIAL	Aluminum 6063 Matte Finish with clear / Frosted Lens
MOUNTING	Aluminum mounted on Surface
RATED POWER	Depending on the required length
COLOR	W/WW/ NW
DIMENSION	W - 20 x H - 16 mm
APPLICATION	Curtains, Linear Wall Gracer

Rs.1,504/mtr-


iLED AP 45-CEILING

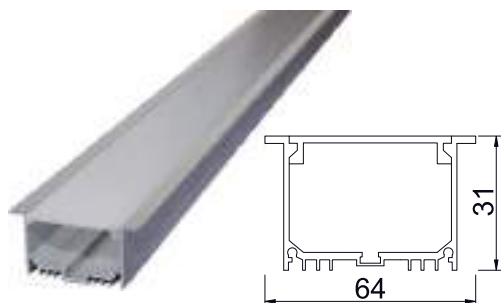

MATERIAL	Recessed Aluminum LED profile with flange
MOUNTING	Aluminum Recess mount
RATED POWER	Depending on the required length
COLOR	W/WW/ NW
DIMENSION	W - 64 x H - 31 mm
APPLICATION	Recess Mount

Rs.2,005/mtr-


iLED AP 49 - WALL MOUNT (UP & DOWN LIGHT)

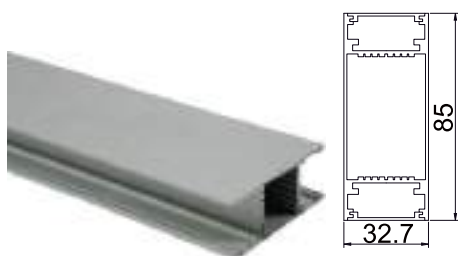

MATERIAL	Aluminum LED profile for walllight, with internal driver
MOUNTING	Aluminum mounted on Surface of wall
RATED POWER	Depending on the required length
COLOR	W/WW/ NW
DIMENSION	W - 32.7 x H - 85 mm
APPLICATION	Wall Mount

Rs.2,896/mtr-


iLED AP 52 - SUSPENSION

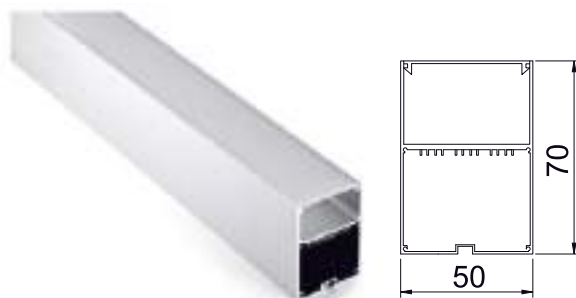

MATERIAL	Aluminum LED profile for pendant light
MOUNTING	Aluminum mounted on Surface or Suspended
RATED POWER	Depending on the required length
COLOR	W/WW/ NW
DIMENSION	W - 50 x H - 70 mm
APPLICATION	Ceiling Suspension / Surface


Rs.3,119/mtr-

iLED AP 114 - FLEXIBLE PROFILE

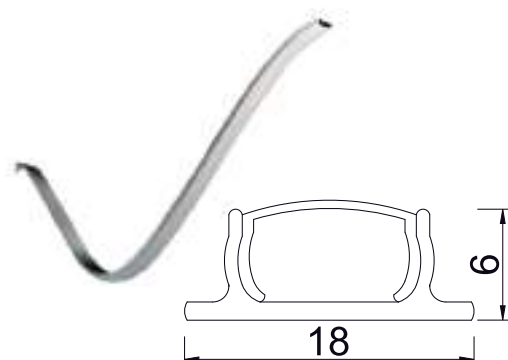

MATERIAL	Aluminum LED profile for pendant light / Pillar
MOUNTING	Aluminum mounted on Surface or Suspended
RATED POWER	Depending on the required length
COLOR	W/WW/ NW
DIMENSION	W - 18 x H - 6 mm
APPLICATION	Ceiling Suspension / Circular / Flexible


Rs.702/mtr-



iLED LS 30-8A - SUSPENSION LUXPRO®

MATERIAL	Aluminum LED profile for pendant light
MOUNTING	Aluminum mounted on Surface or Suspended
RATED POWER	Depending on the required length
COLOR	W/WW/ NW
DIMENSION	L - 1066 x W-33.6 x H-75 mm
APPLICATION	Ceiling Suspension / Surface


Rs.7,039/mtr-

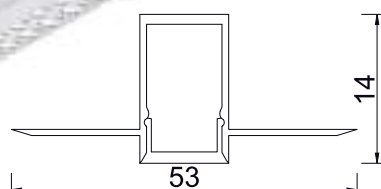

iLED AP 068-R - TRIMLESS RECESS

MATERIAL	Aluminum LED profile for Recess Mount
MOUNTING	Aluminum mounted on Ceiling Recess
RATED POWER	Depending on the required length
COLOR	W/WW/ NW
DIMENSION	W - 53 x H - 14 mm
APPLICATION	Recess Mount


Rs.1,426/mtr-

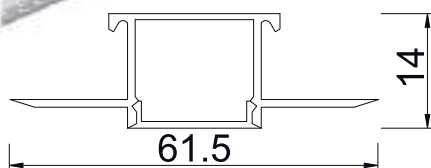

iLED AP 071 - TRIMLESS RECESS

MATERIAL	Aluminum LED profile for Recess Mount
MOUNTING	Aluminum mounted on Ceiling Recess
RATED POWER	Depending on the required length
COLOR	W/WW/ NW
DIMENSION	W - 61.5 x H - 14 mm
APPLICATION	Recess Mount

Rs.1,804/mtr-




iLED AP 630 CUPBOARD ROD HANGER LUXPRO®

MATERIAL	Aluminum LED profile for Recess Mount
MOUNTING	Aluminum mounted on Wardrobe with Endcap
RATED POWER	Depending on the required length
COLOR	W/WW/ NW
DIMENSION	W - 15 x H - 30 mm
APPLICATION	Cupboard Hanger / Wardrobe

Rs.650/mtr-


iLED AP 6244

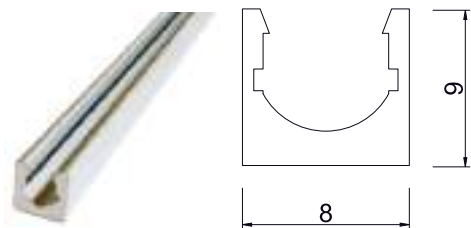

MATERIAL	Aluminum LED profile for Recess Mount
MOUNTING	Aluminum mounted on Surface / Recess
RATED POWER	Depending on the required length
COLOR	W/WW/ NW
DIMENSION	W- 8 x H-9 mm
APPLICATION	Recess Mount / Recess

Rs.300/mtr-



iLED 6 ST BD 01

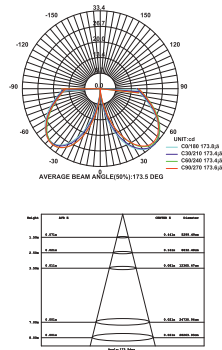

MATERIAL	Stainless Steel Housing with Solid Acrylic Diffuser
MOUNTING	Surface Mount
I/P VOLTAGE	230VAC,50/60Hz
COLOR	W/WW/NW
RATED POWER	6W
LUMEN FLUX	720-540Lm
DIMENSION	D-128(Base) X H-475 X D-47 mm Cylinder
APPLICATION	Garden / Pathway

Rs.3,000/-



iLED 6 ST BD 02



MATERIAL	Stainless Steel Housing with Solid Acrylic Diffuser
MOUNTING	Surface Mount
I/P VOLTAGE	230VAC,50/60Hz
COLOR	W/WW/NW
RATED POWER	6W
LUMEN FLUX	720-540Lm
DIMENSION	D-128(Base) X H-475 X D-47 mm Cylinder
APPLICATION	Garden / Pathway

Rs.3,000/-



iLED 12 BD 9826 03

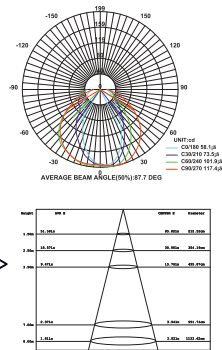

MATERIAL	Ventilated Powder coated Die cast Aluminium with Solid Acrylic Diffuser
MOUNTING	Surface Mount
I/P VOLTAGE	230VAC,50/60Hz
COLOR	W/WW/NW
RATED POWER	12W
LUMEN FLUX	1440-1200Lm
DIMENSION	L-100 X W-100 x H-600 mm
APPLICATION	Garden / Pathway

Rs3,900/-


iLED 12 BD 9830 04

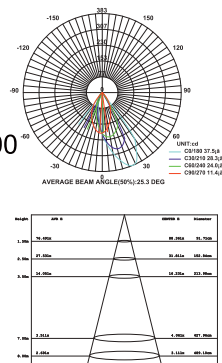

MATERIAL	Ventilated Powder coated Die cast Aluminium with Tempered Glass
MOUNTING	Surface Mount
I/P VOLTAGE	230V AC, 50/60Hz
COLOR	W/WW/NW
RATED POWER	12W
LUMEN FLUX	1440-1200Lm
DIMENSION	L-105 X W-80 x H-400 mm
APPLICATION	Garden / Pathway

Rs.3,700/-


iLED 12 BD 05

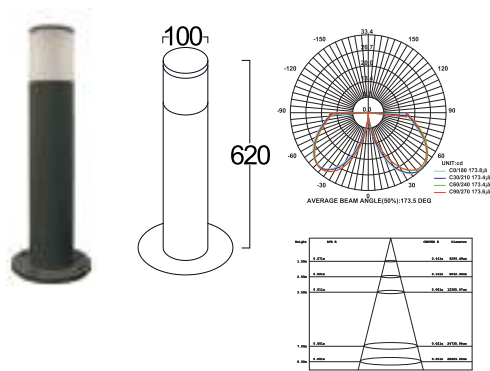

MATERIAL	Aluminum Die Casting Graphite Black Finish
MOUNTING	Surface Mount
I/P VOLTAGE	230VAC,50/60Hz
COLOR	W/WW/NW
RATED POWER	12W
LUMEN FLUX	1440-1200Lm
DIMENSION	H-620 X D-100 mm
APPLICATION	Gate lights / Pathway

Rs.2,750/-


iLED BD 06

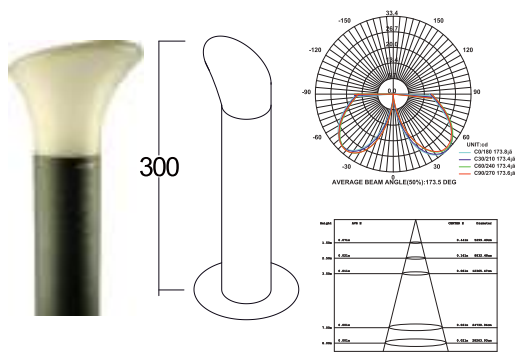

MATERIAL	Aluminum Die Casting Graphite Black Finish
MOUNTING	Surface Mount
I/P VOLTAGE	230VAC,50/60Hz
COLOR	W/WW/NW
RATED POWER	On request
LUMEN FLUX	120-100Lm / watt
DIMENSION	H-300 mm
APPLICATION	Gate lights / Pathway

Rs.1,950/-


iLED BD 07

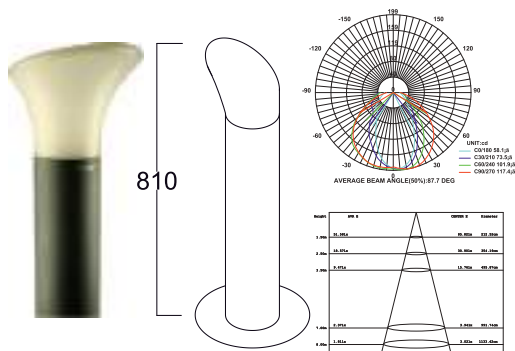

MATERIAL	Aluminum Die Casting Graphite Black Finish
MOUNTING	Surface Mount
I/P VOLTAGE	230VAC,50/60Hz
COLOR	W/WW/NW
RATED POWER	On request
LUMEN FLUX	120-100Lm / watt
DIMENSION	H-810 mm
APPLICATION	Gate lights / Pathway

Rs.2,950/-


iLED BD 08

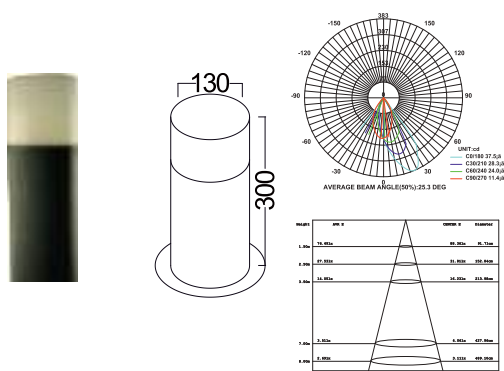

MATERIAL	Aluminum Die Casting Graphite Black Finish
MOUNTING	Surface Mount
I/P VOLTAGE	230VAC,50/60Hz
COLOR	W/WW/NW
RATED POWER	On request
LUMEN FLUX	120-100Lm / watt
DIMENSION	H-300 x W-130 mm
APPLICATION	Gate lights / Pathway

Rs.1,850/-


iLED BD 09

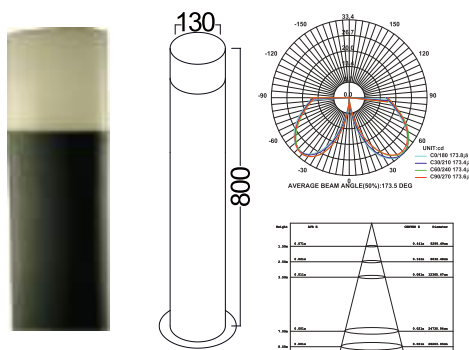

MATERIAL	Aluminum Die Casting Graphite Black Finish
MOUNTING	Surface Mount
I/P VOLTAGE	230V AC, 50/60Hz
COLOR	W/WW/NW
RATED POWER	On request
LUMEN FLUX	120-100Lm / watt
DIMENSION	H-800 x D-130 mm
APPLICATION	Gate lights / Pathway

Rs.2,750/-


iLED BD 10

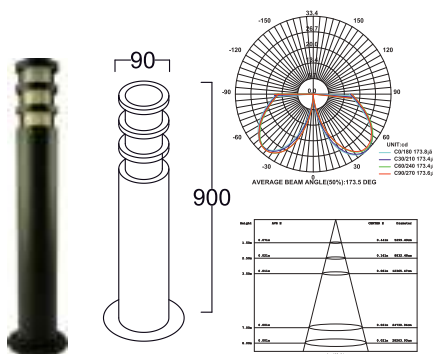

MATERIAL	Aluminum Die Casting Graphite Black Finish
MOUNTING	Surface Mount
I/P VOLTAGE	230V AC, 50/60Hz
COLOR	W/WW/NW
RATED POWER	On request
LUMEN FLUX	120-100Lm / watt
DIMENSION	H-900 X D-90 mm
APPLICATION	Gate lights / Pathway

Rs.3,800/-


iLED BD 11

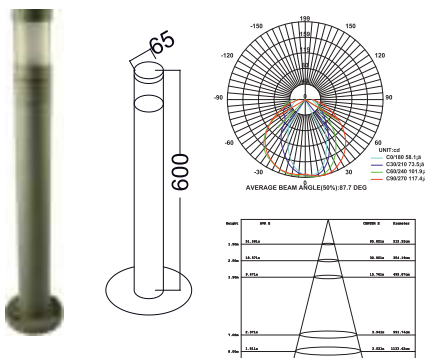

MATERIAL	Aluminum Die Casting Graphite Black Finish
MOUNTING	Surface Mount
I/P VOLTAGE	230V AC, 50/60Hz
COLOR	W/WW/NW
RATED POWER	On request
LUMEN FLUX	120-100Lm / watt
DIMENSION	H-600 x D-65 mm
APPLICATION	Gate lights / Pathway

Rs.2,500/-




iLED 20 BD 12

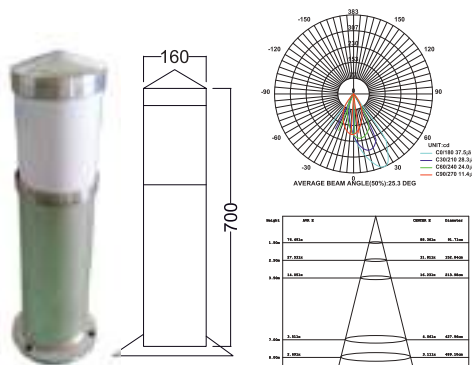

MATERIAL	Aluminum Die Casting Graphite Black Finish With Clear / Milky Diffuser
MOUNTING	Surface Mount
I/P VOLTAGE	230V AC, 50/60Hz
COLOR	W/WW/NW
RATED POWER	20W
LUMEN FLUX	2400-2000Lm
DIMENSION	H-700 X D-160 mm
APPLICATION	Gate lights / Pathway

Rs.6,200/-

iLED 7 BD 13



MATERIAL

Aluminum Die Casting Graphite Black Finish
With Clear / Milky Diffuser

MOUNTING

Surface Mount

I/P VOLTAGE

230V AC, 50/60Hz

COLOR

W/WW/NW

RATED POWER

7W

LUMEN FLUX

840-700Lm

DIMENSION




L-160 X W-53 X H-300 mm

APPLICATION

Gate lights / Pathway

Rs.4,350/-

iLED 12 BD 14



MATERIAL

Aluminum Die Casting Graphite Black Finish
With Clear / Milky Diffuser

MOUNTING

Surface Mount

I/P VOLTAGE

230 VAC, 50/60Hz

COLOR

W/WW/NW

RATED POWER

12W

LUMEN FLUX

1440-1200Lm

DIMENSION




L-160 X W-53 X H-600 mm

APPLICATION

Gate lights / Pathway

Rs.5,250/-

iLED 7 BD 15



MATERIAL

Aluminum Die Casting Graphite Black
Finish With Clear / Milky Diffuser

MOUNTING

Surface Mount

I/P VOLTAGE

230V AC, 50/60Hz

COLOR

W/WW/NW

RATED POWER

7W

LUMEN FLUX

840-700Lm

DIMENSION




D-149 X H-300 mm

APPLICATION

Gate lights / Pathway

Rs.2,500/-

iLED 12 BD 16



MATERIAL

Aluminum Die Casting Graphite Black Finish
With Clear / Milky Diffuser

MOUNTING

Surface Mount

I/P VOLTAGE

230 VAC, 50/60Hz

COLOR

W/WW/NW

RATED POWER

12W

LUMEN FLUX

1440-1200Lm



DIMENSION

D-149 X H-600 mm

APPLICATION

Gate lights / Pathway



Rs.3,900/-

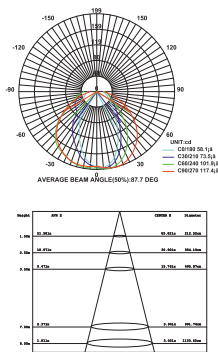

iLED 7 BD 17

MATERIAL	Aluminum Die Casting Graphite Black Finish With Clear / Milky Diffuser
MOUNTING	Surface Mount
I/P VOLTAGE	230V AC, 50/60Hz
COLOR	W/WW/NW
RATED POWER	7W
LUMEN FLUX	840-700Lm
DIMENSION	D-150 X H-300 mm
APPLICATION	Gate lights / Pathway



Rs.4,950/-

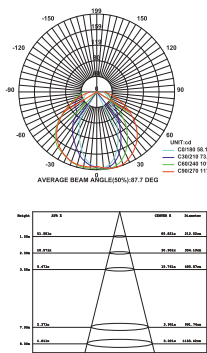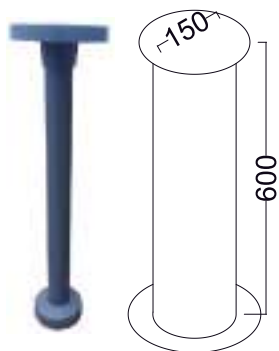

iLED 12 BD 18

MATERIAL	Aluminum Die Casting Graphite Black Finish With Clear / Milky Diffuser
MOUNTING	Surface Mount
I/P VOLTAGE	230V AC, 50/60Hz
COLOR	W/WW/NW
RATED POWER	12
LUMEN FLUX	1440-1200Lm
DIMENSION	D-150 X H-600 mm
APPLICATION	Gate lights / Pathway



Rs.5,750/-



iLED 12 BD 19

MATERIAL	Aluminum Die Casting Graphite Black Finish With Clear / Milky Diffuser
MOUNTING	Surface Mount
I/P VOLTAGE	230V AC, 50/60Hz
COLOR	W/WW/NW
RATED POWER	12W
LUMEN FLUX	1440-1200Lm
DIMENSION	L-127 X W-98 X H-714 mm
APPLICATION	Gate lights / Pathway

Rs.4,950/-

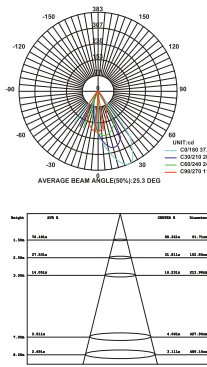



iLED 12 BD 20

MATERIAL	Aluminum Die Casting Graphite Black Finish With Clear / Milky Diffuser
MOUNTING	Surface Mount
I/P VOLTAGE	230VAC, 50/60Hz
COLOR	W/WW/NW
RATED POWER	12W
LUMEN FLUX	1440-1200Lm
DIMENSION	D-65 X H-600 mm
APPLICATION	Gate lights / Pathway

Rs.6,500/-



iLED 12 / 20 BD 21

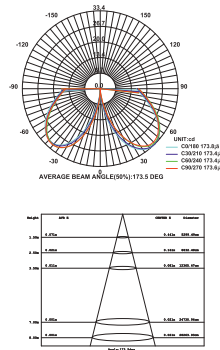

MATERIAL	Aluminum Die Casting Graphite Black Finish With Clear Lens / Crystal Diffuser
MOUNTING	Surface Mount
I/P VOLTAGE	230VAC, 50/60Hz
COLOR	W/WW/NW
RATED POWER	12 / 20W
LUMEN FLUX	1440-1200Lm / 2400-2000Lm
DIMENSION	D-108 X H-1000 mm
APPLICATION	Gate lights / Pathway

Rs.10,500/-



iLED 12 / 20 BD 22



MATERIAL	Aluminum Die Casting Graphite Black Finish With designed crystal clear Diffuser
MOUNTING	Surface Mount
I/P VOLTAGE	230VAC, 50/60Hz
COLOR	W/WW/NW
RATED POWER	12 / 20W
LUMEN FLUX	1440-1200Lm / 2400-2000Lm
DIMENSION	D-108 X H-600 mm
APPLICATION	Gate lights / Pathway


Rs.5,550/-

iLED 12 / 20 BD 23



MATERIAL	Aluminum Die Casting Graphite Black Finish With designed crystal clear Diffuser
MOUNTING	Surface Mount
I/P VOLTAGE	230VAC, 50/60Hz
COLOR	W/WW/NW
RATED POWER	12 / 20W
LUMEN FLUX	1440-1200Lm / 2400-2000Lm
DIMENSION	D-108 X H-600 mm
APPLICATION	Gate lights / Pathway


Rs.5,550/-

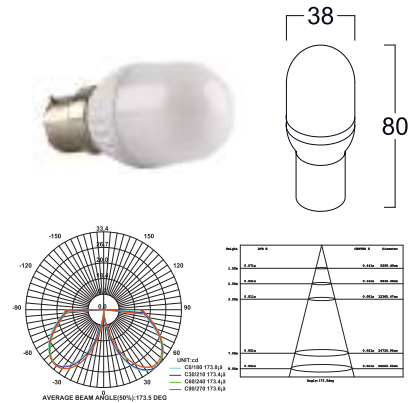

iLED 3 B 01

MATERIAL	Acrylonitrile Butadiene Styreneplastic with PMMA Milky Cover
MOUNTING	Retrofit: E14/E27/B22
I/P VOLTAGE	230VAC,50/60Hz
RATED POWER	3/4W
LUMEN FLUX	360 - 300Lm
COLOR	W/WW / NW
DIMENSION	D-38 X H-80 mm
DIMENSION (Box)	W-44 X H-90 mm
APPLICATION	Hotels, Restaurants, Super Markets,Home, Hospitals Etc.,


Rs.120/-

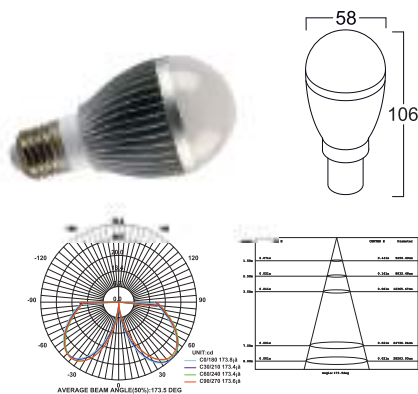

iLED 6 B 02

MATERIAL	entilated Aluminum Coolingwith PMMA Milky Cover
MOUNTING	Retrofit E14/E27/B22
I/P VOLTAGE	230VAC,50/60Hz
RATED POWER	6W
LUMEN FLUX	720 - 600Lm
COLOR	W/WW / NW
DIMENSION	D-58 X H-106 mm
DIMENSION (BOX)	W-70 X H-130 mm
APPLICATION	Hotels, Restaurants, Super Markets,Home, Hospitals Etc.,


Rs.225/-

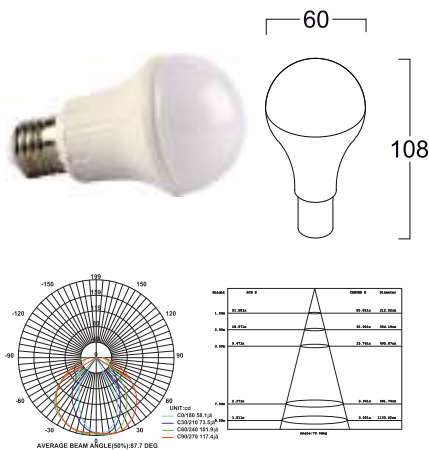

iLED 9 B 03

MATERIAL	Proof Thermoplastic with PMMA milky cover
MOUNTING	Retrofit E27/B22
I/P VOLTAGE	230VAC,50/60Hz
RATED POWER	9W
LUMEN FLUX	840 -700 Lm
COLOR	COLOR : W/WW / NW
DIMENSION	D-60 X H-108 mm
DIMENSION (BOX)	W-70 X H-130 mm
APPLICATION	Hotels, Restaurants, Super Markets,Home, Hospitals Etc.,

Rs.300/-

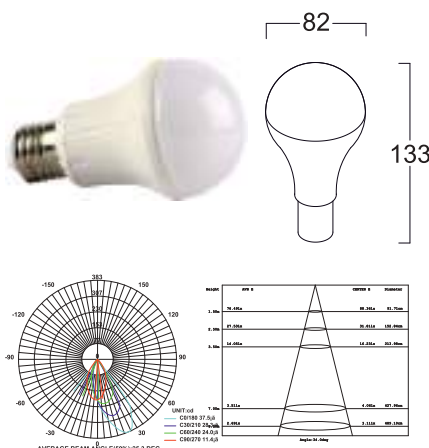

iLED 13 B 04

MATERIAL	Proof Thermoplastic withPMMA milky cover
MOUNTING	Retrofit E27/B22
I/P VOLTAGE	230VAC,50/60Hz
RATED POWER	RATED POWER : 13W
LUMEN FLUX	1440 - 1200Lm
COLOR	W/WW / NW
DIMENSION	D-82 X H-133 mm
DIMENSION (BOX)	W-86 X H-139 mm
APPLICATION	Hotels, Restaurants, Super Markets,Home, Hospitals Etc.,

Rs.375/-


iLED 5 TCB 05



MATERIAL	Proof Thermoplastic withPMMA milky cover
MOUNTING	Retrofit E27/B22
I/P VOLTAGE	230VAC,50/60Hz
RATED POWER	2.5W + 2.5W
LUMEN FLUX	360 -270 Lm
COLOR	W&WW, R&B, R&G, B&G
DIMENSION	D-50 X H-85 mm
DIMENSION (Box)	W-65 X H-85 mm
APPLICATION	Hotels, Restaurants, Super Markets, Home, Hospitals Etc.,

Rs.190/-


iLED 8 TCB 06

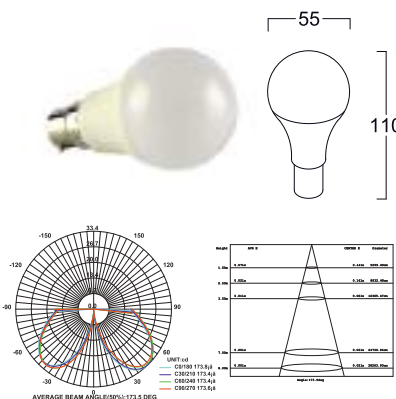

MATERIAL	Proof Thermoplastic withPMMA milky cover
MOUNTING	Retrofit E27/B22
I/P VOLTAGE	230VAC,50/60Hz
RATED POWER	4W + 4W
LUMEN FLUX	480 -360 Lm
COLOR	W&WW, R&B, R&G, B&G
DIMENSION	D-55 X H-110 mm
DIMENSION (Box)	W-70 X H-130 mm
APPLICATION	Hotels, Restaurants, Super Markets, Home, Hospitals Etc.,

Rs.225/-


iLED 10 TCB 07

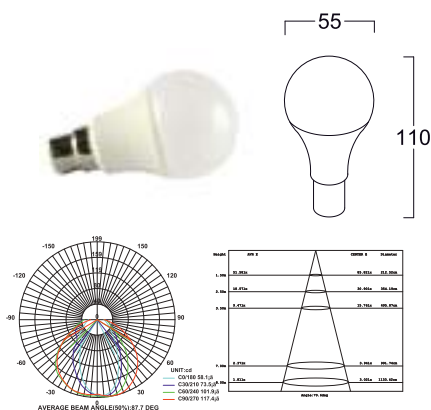

MATERIAL	Proof Thermoplastic withPMMA milky cover
MOUNTING	Retrofit E27/B22
I/P VOLTAGE	230VAC,50/60Hz
RATED POWER	5W + 5W
LUMEN FLUX	600 -450 Lm
COLOR	W&WW, R&B, R&G, B&G
DIMENSION	D-55 X H-110 mm
DIMENSION (Box)	W-70 X H-130 mm
APPLICATION	Hotels, Restaurants, Super Markets, Home, Hospitals Etc.,


Rs.250/-

iLED 12 TCB 08

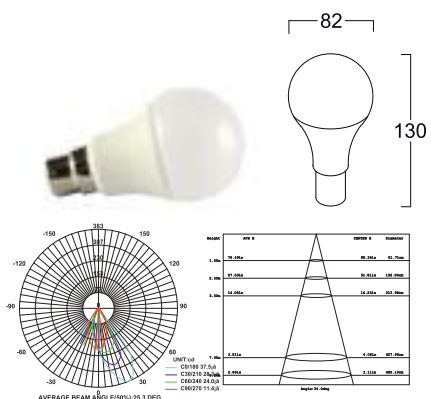

MATERIAL	Proof Thermoplastic withPMMA milky cover
MOUNTING	Retrofit E27/B22
I/P VOLTAGE	230VAC,50/60Hz
RATED POWER	6W + 6W
LUMEN FLUX	720 -540 Lm
COLOR	W&WW, R&B, R&G, B&G
DIMENSION	D-82 X H-130 mm
DIMENSION (Box)	W-86 X H-139 mm
APPLICATION	Hotels, Restaurants, Super Markets, Home, Hospitals Etc.,


Rs.300/-

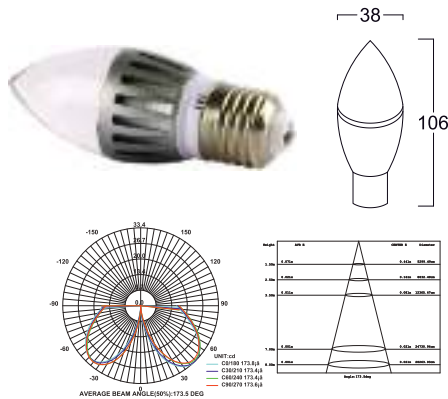

iLED 6 PL 09

MATERIAL	Ventilated Aluminum Coolingwith PMMA Cover-Clear
MOUNTING	Retrofit E14/E27/B22
I/P VOLTAGE	230VAC,50/60Hz
RATED POWER	6W
LUMEN FLUX	720 - 600Lm
COLOR	W/WW / NW
DIMENSION	D-38 X H-106 mm
DIMENSION (Box)	W-50 X H-200 mm
APPLICATION	Hotels, Restaurants, Super Markets, Home, Hospitals Etc.,


Rs.392/-

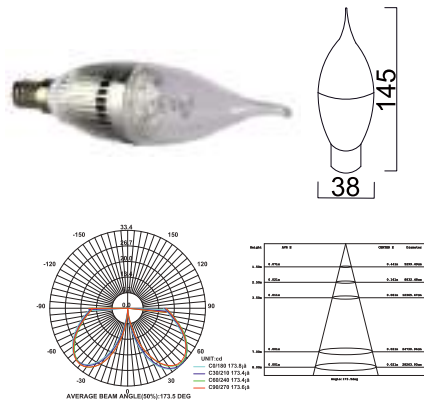

iLED 6 PL 10

MATERIAL	Ventilated Aluminum Coolingwith PMMA Cover-Clear
MOUNTING	Retrofit E14/E27/B22
I/P VOLTAGE	230VAC,50/60Hz
RATED POWER	6W
LUMEN FLUX	720 - 600Lm
COLOR	W/WW / NW
DIMENSION	D-38 X H-145 mm
DIMENSION (Box)	W-50 X H-200 mm
APPLICATION	Hotels, Restaurants, Super Markets, Home, Hospitals Etc.,


Rs.392/-

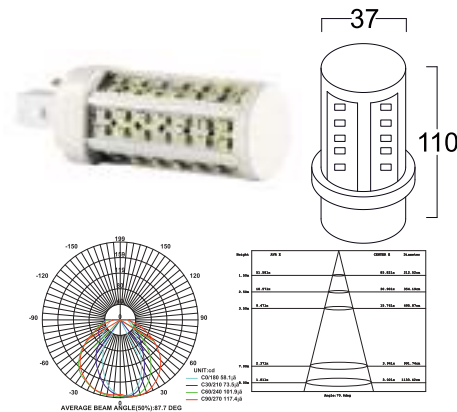

LED 5 CB 11

MATERIAL	Abs Plastic
MOUNTING	Retrofit G24
I/P VOLTAGE	230VAC,50/60Hz
RATED POWER	5 W
LUMEN FLUX	440- 300Lm
COLOR	W/WW / NW
DIMENSION	D-37 X H-110 mm
DIMENSION (Box)	W-55 X H-120 mm
APPLICATION	Hotels, Restaurants, Super Markets, Home, Hospitals Etc.,


Rs.200/-

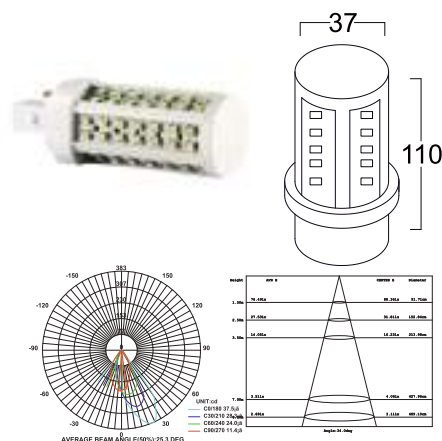

iLED 7 CB 12

MATERIAL	Abs Plastic
MOUNTING	Retrofit :G24
I/P VOLTAGE	230VAC,50/60Hz
RATED POWER	7 W
LUMEN FLUX	600 - 550Lm
COLOR	W/WW / NW
DIMENSION	D-37 X H-110 mm
DIMENSION (Box)	W-55 X H-125 mm
APPLICATION	Hotels, Restaurants, Super Markets, Home, Hospitals Etc.,


Rs.250/-

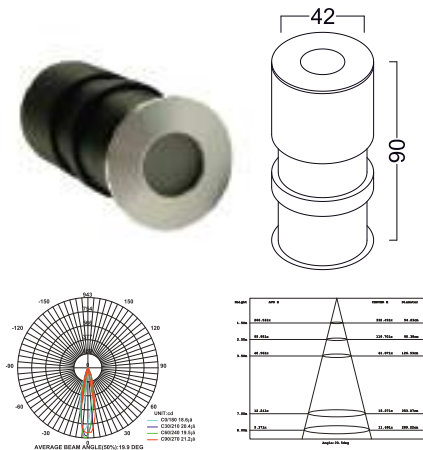

iLED 3 UG 01

MATERIAL	Ventilated aluminum with PMMA transparent lens & Milky
MOUNTING	Outdoor burial Mount
I/P VOLTAGE	230VAC,50/60Hz / 24V DC
RATED POWER	3W
LUMEN FLUX	360-300Lm
COLOR	W/WW/NW/R/G/B
DIMENSION	D-42 X H-90 mm
APPLICATION	Sign, facade, area, accent and general security lighting
ANGLE	5°, 10°, 25°, 30°, 45°


Rs.1,250/-

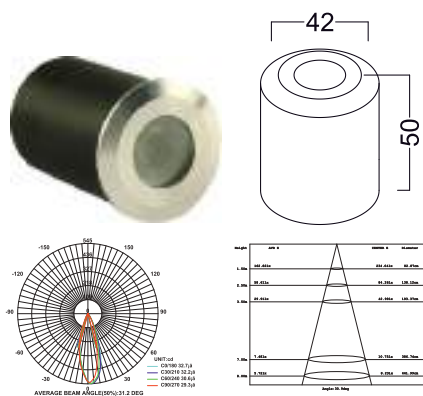

iLED 3 UG 02

MATERIAL	Ventilated powder coated Diecast Aluminum with tempered glass & reflector
MOUNTING	Outdoor burial Mount
I/P VOLTAGE	230VAC,50/60Hz / 24V DC
RATED POWER	3W
LUMEN FLUX	360-300Lm
COLOR	W/WW/NW/R/G/B
DIMENSION	D-42 X H-50 mm
APPLICATION	Sign, facade, area, accent and general security lighting
ANGLE	5°, 10°, 25°, 30°, 45°

Rs.1,025/-

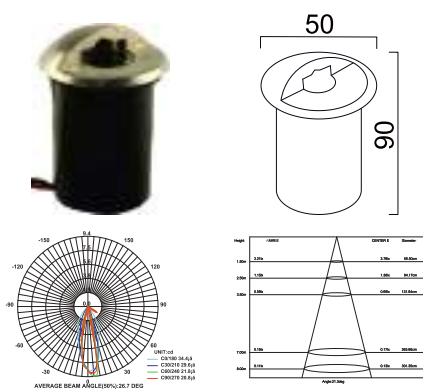

iLED 3 PWL 03 - ONE WAY

MATERIAL	Ventilated aluminum Diecasting with PMMA Lens
MOUNTING	Outdoor burial Mount
I/P VOLTAGE	230VAC,50/60Hz / 24V DC
RATED POWER	3W
LUMEN FLUX	360-300Lm
COLOR	W/WW/NW/R/G/B
DIMENSION	D-50 X H-90 mm
APPLICATION	Sign, facade, area, accent and general security lighting




Rs.1,700/-



iLED 3 PWL 04 - TWO WAY

MATERIAL	Ventilated aluminum Diecasting with PMMA Lens
MOUNTING	Outdoor burial Mount
I/P VOLTAGE	230VAC,50/60Hz / 24V DC
RATED POWER	3W
LUMEN FLUX	360-300Lm
COLOR	W/WW/NW/R/G/B
DIMENSION	D-50 X H-90 mm
APPLICATION	Sign, facade, area, accent and general security lighting




Rs.1,700/-



iLED 3 PWL 05 - THREE WAY

MATERIAL	Ventilated aluminum Die casting with PMMA Lens
MOUNTING	Outdoor burial Mount
I/P VOLTAGE	230VAC, 50/60Hz / 24V DC
RATED POWER	3W
LUMEN FLUX	360-300Lm
COLOR	W/WW/NW/R/G/B
DIMENSION	D-50 X H-90 mm
APPLICATION	Sign, facade, area, accent and general security lighting




Rs.1,700/-



iLED 3 PWL 06 - FOUR WAY

MATERIAL	Ventilated aluminum Die casting with PMMA Lens
MOUNTING	Outdoor burial Mount
I/P VOLTAGE	230VAC, 50/60Hz / 24V DC
RATED POWER	3W
LUMEN FLUX	360-300Lm
COLOR	W/WW/NW/R/G/B
DIMENSION	D-50 X H-90 mm
APPLICATION	Sign, facade, area, accent and general security lighting




Rs.1,700/-



iLED 3 / 9 PWL 07 - FOUR WAY

MATERIAL	Ventilated aluminum Die casting with PMMA Lens
MOUNTING	Outdoor burial Mount
I/P VOLTAGE	230VAC, 50/60Hz / 24V DC
RATED POWER	3 / 9W
LUMEN FLUX	360-300/1080-900Lm
COLOR	W/WW/NW/R/G/B
DIMENSION	D-100 X H-115 mm
APPLICATION	Sign, facade, area, accent and general security lighting


Rs.2,100/-



iLED 4 UG 08

MATERIAL	Stainless steel top with ventilated powder coated Die cast Aluminum with Tempered Glass and Reflector
MOUNTING	Outdoor burial Mount
I/P VOLTAGE	230VAC, 50/60Hz / 24V DC
RATED POWER	W
LUMEN FLUX	480-400Lm
COLOR	W/WW/NW/R/G/B
DIMENSION	D-90 X H-120 mm
APPLICATION	Sign, facade, area, accent and general security lighting
ANGLE	5°, 10°, 25°, 30°, 45°


Rs.1,800/-

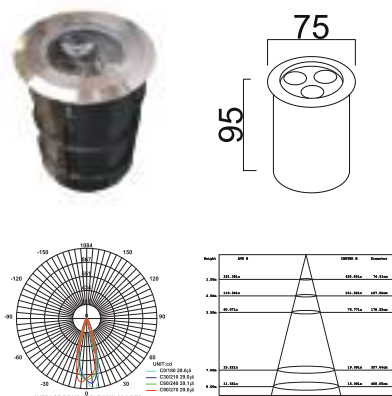

iLED 6 UG 09

MATERIAL	Stainless steel top with ventilated powder coated Die cast Aluminum with Tempered Glass and Reflector
MOUNTING	Outdoor burial Mount
I/P VOLTAGE	230VAC, 50/60Hz / 24V DC
RATED POWER	6W
LUMEN FLUX	720-600Lm
COLOR	W/WW/NW/R/G/B
DIMENSION	D-95 X H-75 mm
APPLICATION	Sign, facade, area, accent and general security lighting
ANGLE	5°, 10°, 25°, 30°, 45°


Rs.2,300/-

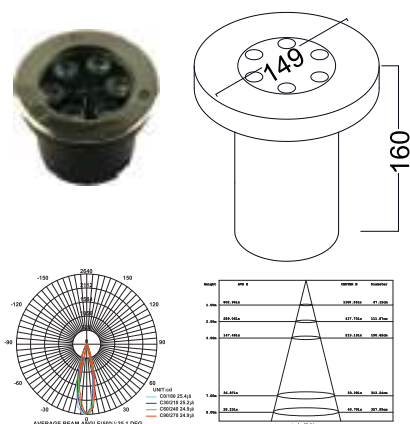

iLED 12 UG 10

MATERIAL	Stainless steel top with ventilated powder coated Die cast Aluminum with Tempered Glass and Reflector
MOUNTING	Outdoor burial Mount
I/P VOLTAGE	230VAC, 50/60Hz / 24V DC
RATED POWER	9/12W
LUMEN FLUX	1080-900/1440-1200Lm
COLOR	W/WW/NW/R/G/B
DIMENSION	D -146 X H- 160 mm
APPLICATION	Sign, facade, area, accent and general security lighting
ANGLE	5°, 10°, 25°, 30°, 45°


Rs.3,000/-

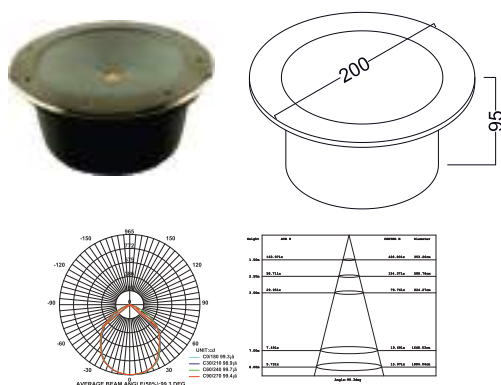

iLED 20/24 UG 11

MATERIAL	Stainless steel top with ventilated powder coated Die cast Aluminum with Tempered Glass and Reflector
MOUNTING	Outdoor burial Mount
I/P VOLTAGE	230VAC, 50/60Hz / 24V DC
RATED POWER	20/24W
LUMEN FLUX	2400-2000/2880-2400Lm
COLOR	W/WW/NW
DIMENSION	D -200 X H- 95 mm
APPLICATION	Sign, facade, area, accent and general security lighting
ANGLE	5°, 10°, 25°, 30°, 45°

Rs.4,500/-



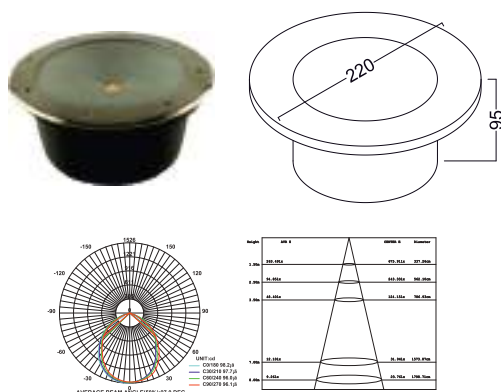


iLED 30/40 UG 12

MATERIAL	Stainless steel top with ventilated powder coated Die cast Aluminum with Tempered Glass and Reflector
MOUNTING	Outdoor burial Mount
I/P VOLTAGE	230VAC, 50/60Hz / 24V DC
RATED POWER	30/40W
LUMEN FLUX	3600-3000/4800-4000Lm
COLOR	W/WW/NW
DIMENSION	D- 220 XH - 95 mm
APPLICATION	Sign, facade, area, accent and general security lighting
ANGLE	5°, 10°, 25°, 30°, 45°

Rs.6,000/-

NEW






iLED 15 UG 13-ANTIGLARE LUXPRO®

MATERIAL	Stainless steel top with ventilated powder coated Die cast Aluminum with Lens, tempered glass & Honeycomb Filter
MOUNTING	Outdoor burial Mount
I/P VOLTAGE	230VAC, 50/60Hz / 24V DC
RATED POWER	15W
LUMEN FLUX	1800-1500Lm
COLOR	W/WW/NW
DIMENSION	D- 180 XH -110 mm
APPLICATION	Sign, facade, area, accent and general security lighting
ANGLE	5°, 10°, 25°, 30°, 45°

Rs.7,250/-

NEW






iLED 25 UG 14-ANTIGLARE LUXPRO®

MATERIAL	Stainless steel top with ventilated powder coated Die cast Aluminum with Lens, tempered glass & Honeycomb Filter
MOUNTING	Outdoor burial Mount
I/P VOLTAGE	230VAC, 50/60Hz / 24V DC
RATED POWER	25W
LUMEN FLUX	3000-2500Lm
COLOR	W/WW/NW
DIMENSION	D- 220 XH - 110 mm
APPLICATION	Sign, facade, area, accent and general security lighting
ANGLE	5°, 10°, 25°, 30°, 45°

Rs.12,500/-

NEW






iLED 6 UG 15 - NARROW BEAM LUXPRO®

MATERIAL	Ventilated powder coated Diecast Aluminum with Narrow beam Lens
MOUNTING	Outdoor burial Mount
I/P VOLTAGE	230VAC, 50/60Hz / 24V DC
RATED POWER	6 W
LUMEN FLUX	720-600Lm
COLOR	W/WW/NW/R/G/B
DIMENSION	L-60 X W-60 X H-112 mm
APPLICATION	Sign, facade, area, accent and general security lighting
ANGLE	2°

Rs.4,500/-

iLED 1 RDL 01



MATERIAL

Ventilated Aluminium cooling with PMMA lens

MOUNTING

Recessed Mount

I/P VOLTAGE

230V AC, 50/60Hz

RATED POWER

1W

LUMEN FLUX

120-90Lm

COLOR

W/ WW / NW

DIMENSION

D-20 X H-30 mm

CUT OUT DIA

14mm

APPLICATION




Hotel, Show room, Home, Office, Auditorium, Theaters

ANGLE

25°

Rs.350/-

iLED 3 RDL 02



MATERIAL

Ventilated Aluminium cooling with PMMA lens & Adjustable

MOUNTING

Recessed Mount

I/P VOLTAGE

230V AC, 50/60Hz

RATED POWER

3W

LUMEN FLUX

120Lm / Watt

COLOR

W/ WW / NW

DIMENSION

D-52 X H-32 mm

CUT OUT DIA

38mm

APPLICATION




Hotel, Show room, Home, Office, Auditorium, Theaters

ANGLE

5°, 10°, 25°, 30°, 45°

Rs.350/-

iLED 3 RDL 03



MATERIAL

Ventilated Aluminium cooling with PMMA lens

MOUNTING

Recessed Mount

I/P VOLTAGE

230V AC, 50/60Hz

RATED POWER

3W

LUMEN FLUX

360-300Lm

COLOR

W/ WW / NW

DIMENSION

D-35 X H-50 mm

CUT OUT DIA

27mm

APPLICATION


Hotel, Show room, Home, Office, Auditorium, Theaters

ANGLE

5°, 10°, 25°, 30°, 45°

Rs.675/-


iLED 3 RDL 04

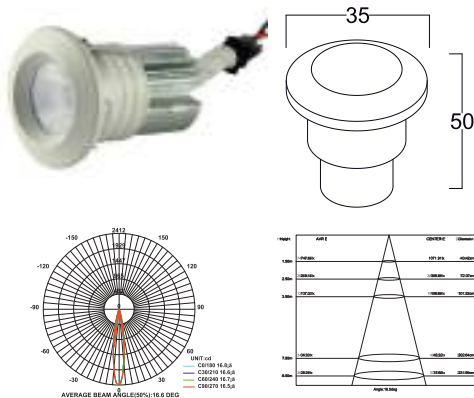

MATERIAL	Ventilated Aluminium cooling with PMMA lens
MOUNTING	Recessed Mount
I/P VOLTAGE	230V AC, 50/60Hz
RATED POWER	3W
LUMEN FLUX	360-300Lm
COLOR	W/ WW / NW
DIMENSION	D-35 X H-50 mm
CUT OUT DIA	27mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters
ANGLE	5°, 10°, 25°, 30°, 45°

Rs.675/-


iLED 3/6 RDL 05

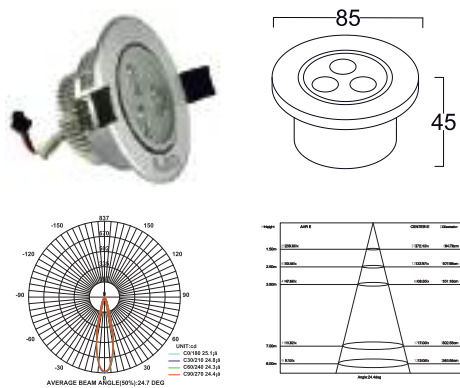

MATERIAL	Ventilated Aluminum Cooling with PMMA LENS & Adjustable
MOUNTING	Recessed Mount
I/P VOLTAGE	230V AC, 50/60Hz
RATED POWER	3W / 6W
LUMEN FLUX	360-300Lm
COLOR	W/ WW / NW
DIMENSION	D-85 x H-45 mm
CUT OUT DIA	65mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters
ANGLE	5°, 10°, 25°, 30°, 45°

Rs.450/- / Rs.650/-




iLED 3/6 SDL 06

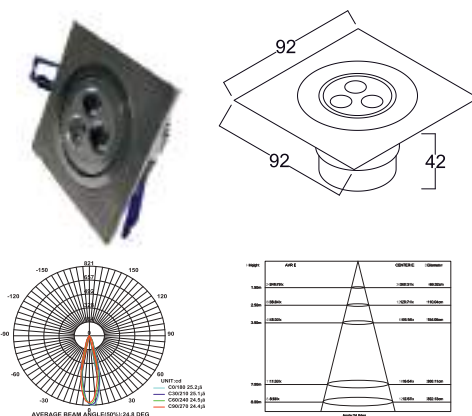

MATERIAL	Ventilated Aluminum Cooling with PMMA LENS & Adjustable
MOUNTING	Recessed Mount
I/P VOLTAGE	230V AC, 50/60Hz
RATED POWER	3W / 6W
LUMEN FLUX	360-300Lm
COLOR	W/ WW / NW
DIMENSION	L - 92 X W - 92 X H-42 mm
CUT OUT DIA	65mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters
ANGLE	5°, 10°, 25°, 30°, 45°

Rs.475/- / Rs.675/-

iLED 5 RDL 07



MATERIAL

Ventilated Aluminium cooling with PMMA lens & Adjustable

MOUNTING

Recessed Mount

I/P VOLTAGE

230V AC, 50/60Hz

RATED POWER

5W

LUMEN FLUX

600-500Lm

COLOR

W/ WW / NW

DIMENSION

D-110 X H-62 mm

CUT OUT DIA

86mm

APPLICATION




Hotel, Show room, Home, Office, Auditorium, Theaters

ANGLE

5°, 10°, 25°, 30°, 45°

Rs.885/-

iLED 18 RDL 08



MATERIAL

Ventilated Aluminium cooling with PMMA lens & Adjustable

MOUNTING

Recessed Mount

I/P VOLTAGE

230V AC, 50/60Hz

RATED POWER

18W

LUMEN FLUX

2160-1800Lm

COLOR

W/ WW / NW

DIMENSION

D-160 X H-175 mm

CUT OUT DIA

140mm

APPLICATION




Hotel, Show room, Home, Office, Auditorium, Theaters

ANGLE

5°, 10°, 25°, 30°, 45°

Rs.1,950/-

iLED 1*3 SDL 09



MATERIAL

Ventilated Powder coated Die cast Aluminium with Different Angle reflector

MOUNTING

Recess Mounting with Trim / Trimless

I/P VOLTAGE

230V AC, 50/60Hz

RATED POWER

3W

LUMEN FLUX

360-300Lm

COLOR

W/ WW / NW

DIMENSION

L-45 X W-45 x H-49 mm

CUT OUT DIA

L-37 X W-37 x H-49 mm

APPLICATION




Hotel, Showroom, Home, Office, Auditorium, Theatres etc.

ANGLE

5°, 10°, 25°, 30°, 45°

Rs.850/-

iLED 2*3 SDL 10



MATERIAL

Ventilated Powder coated Die cast Aluminium with Different Angle reflector

MOUNTING

Recess Mounting with Trim / Trimless

I/P VOLTAGE

230V AC, 50/60Hz

RATED POWER

6W

LUMEN FLUX

720-600Lm

COLOR

W/ WW / NW

DIMENSION

L-75 X W-45 x H-49 mm

CUT OUT DIA

L-68 X W-37 x H-49 mm

APPLICATION




Hotel, Showroom, Home, Office, Auditorium, Theatres etc.

ANGLE

5°, 10°, 25°, 30°, 45°

Rs.1,150/-

iLED 5*3 SDL 11



MATERIAL

Ventilated Powder coated Die cast Aluminium with Different Angle reflector

MOUNTING

Recess Mounting with Trim / Trimless

I/P VOLTAGE

230V AC, 50/60Hz

RATED POWER

15W

LUMEN FLUX

1800-1500Lm

COLOR

W/ WW / NW

DIMENSION

L-147 X W-45 x H-49 mm

CUT OUT DIA

L-140 X W-37 x H-49 mm

APPLICATION




Hotel, Showroom, Home, Office, Auditorium, Theatres etc.

ANGLE

5°, 10°, 25°, 30°, 45°

Rs.1,980/-

iLED 10*3 SDL 12



MATERIAL

Ventilated Powder coated Die cast Aluminium with Different Angle reflector

MOUNTING

Recess Mounting with Trim / Trimless

I/P VOLTAGE

230V AC, 50/60Hz

RATED POWER

30W

LUMEN FLUX

3600-3000Lm

COLOR

W/ WW / NW

DIMENSION

L-280 X W-45 x H-49 mm

CUT OUT DIA

L-273 X W-37 x H-49 mm

APPLICATION


Hotel, Showroom, Home, Office, Auditorium, Theatres etc.

ANGLE

5°, 10°, 25°, 30°, 45°


Rs.4,500/-

iLED 15*3 SDL 13

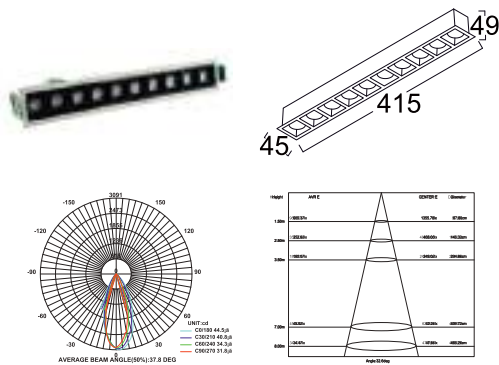

MATERIAL	Ventilated Powder coated Die cast Aluminium with Different Angle reflector
MOUNTING	Recess Mounting with Trim / Trimless
I/P VOLTAGE	230V AC, 50/60Hz
RATED POWER	45W
LUMEN FLUX	5400-4500Lm
COLOR	W/ WW / NW
DIMENSION	L-415 X W-45 x H-49 mm
CUT OUT DIA	L-405 X W-37 x H-49 mm
APPLICATION	Hotel, Showroom, Home, Office, Auditorium, Theatres etc.
ANGLE	5°, 10°, 25°, 30°, 45°


Rs.8,500/-

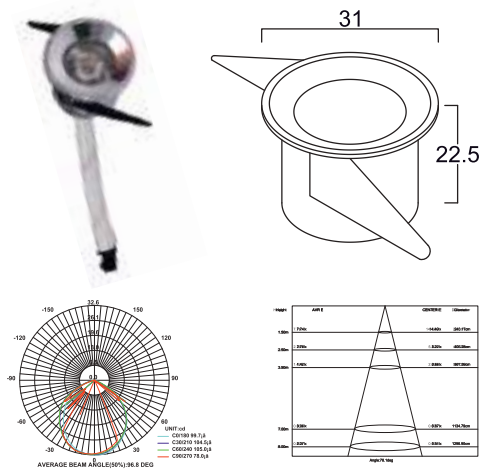

iLED 1 RDL 14

MATERIAL	Ventilated Aluminium cooling with PMMA lens
MOUNTING	Recessed Mount
I/P VOLTAGE	230V AC, 50/60Hz
RATED POWER	1W
LUMEN FLUX	120-100Lm
COLOR	W/ WW / NW
DIMENSION	D-31 X H-22.5 mm
CUT OUT DIA	24mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters
ANGLE	5°, 10°, 25°, 30°, 45°


Rs.450/-

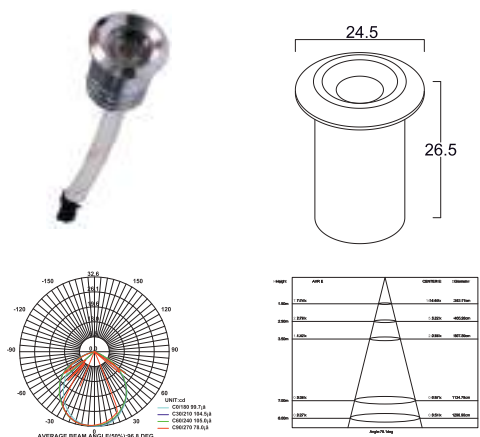

iLED 1 RDL 15

MATERIAL	Ventilated Aluminium cooling with PMMA lens
MOUNTING	Recessed Mount
I/P VOLTAGE	230V AC, 50/60Hz
RATED POWER	1W
LUMEN FLUX	120-100Lm
COLOR	W/ WW / NW
DIMENSION	D-24.5 X H-26.5 mm
CUT OUT DIA	17.5mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters
ANGLE	5°, 10°, 25°, 30°, 45°

Rs.450/-

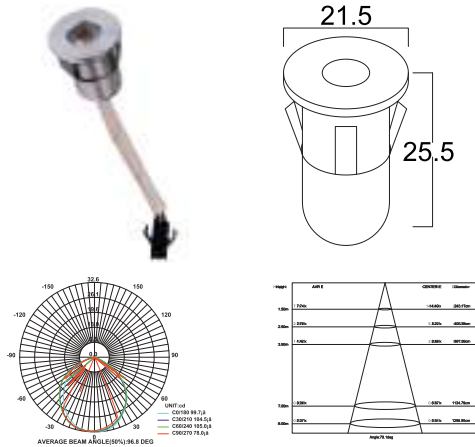

iLED 1 RDL 16

MATERIAL	Ventilated Aluminium cooling with PMMA lens
MOUNTING	Recessed Mount
I/P VOLTAGE	230V AC, 50/60Hz
RATED POWER	1W
LUMEN FLUX	120-100Lm
COLOR	W/ WW / NW
DIMENSION	D-21.5 X H-25.5 mm
CUT OUT DIA	14.5mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters
ANGLE	5°, 10°, 25°, 30°, 45°


Rs.450/-



iLED 3 RDL 17

MATERIAL	Ventilated Aluminium cooling with PMMA lens
MOUNTING	Recessed Mount
I/P VOLTAGE	230V AC, 50/60Hz
RATED POWER	3W
LUMEN FLUX	360-300Lm
COLOR	W/ WW / NW
DIMENSION	D-39 X H-25 mm
CUT OUT DIA	32mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters
ANGLE	5°, 10°, 25°, 30°, 45°


Rs.650/-

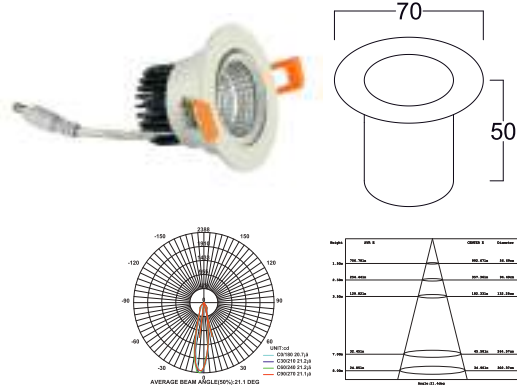

iLED 4/6 RDL COB 01

MATERIAL	Ventilated Aluminum Cooling with polished reflector
MOUNTING	Recessed Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	4/6 W
LUMEN FLUX	720-600 Lm
COLOR	W/WW/ NW
DIMENSION	D-70 X H-50mm
CUT-OUT DIA	60 mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters
ANGLE	5°, 10°, 25°, 30°, 45°


Rs.650/- / Rs.750/-

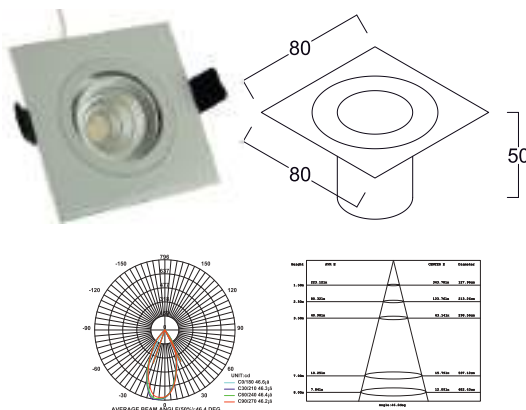

iLED 6 SDL COB 02

MATERIAL	Ventilated Aluminum Cooling with polished reflector
MOUNTING	Recessed Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	6 W
LUMEN FLUX	480-400 Lm
COLOR	W/WW/ NW
DIMENSION	L-80 X W-80 X H-50 mm
CUT-OUT DIA	60 mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters
ANGLE	5°, 10°, 25°, 30°, 45°


Rs.750/-

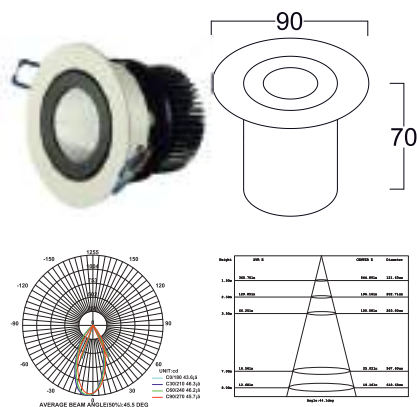

iLED 12 RDL COB 03

MATERIAL	Ventilated Aluminium cooling with polished reflector
MOUNTING	Recessed Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	12W
LUMEN FLUX	1200-1000Lm
COLOR	W/WW/ NW
DIMENSION	D-90 X H-70 mm
CUT-OUT DIA	70 mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters
ANGLE	5°, 10°, 25°, 30°, 45°

Rs.1,050/-

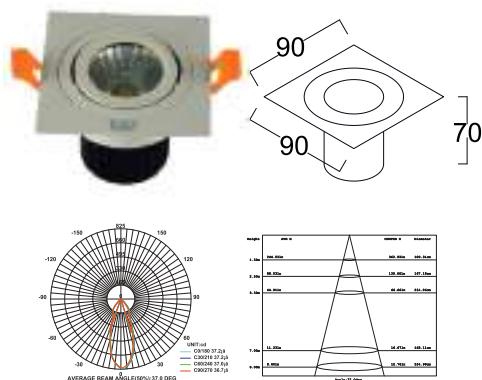

iLED 12 SDL COB 04

MATERIAL	Ventilated Aluminum Cooling with polished reflector
MOUNTING	Recessed Mount
I/P VOLTAGE	230 VAC, 50/60Hz
RATED POWER	12W
LUMEN FLUX	1200-1000Lm
COLOR	W/WW/ NW
DIMENSION	L-90 X W-90 X H-70 mm
CUT-OUT DIA	72mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters
ANGLE	5°, 10°, 25°, 30°, 45°

Rs.1,050/-



iLED 18 RDL COB 05

MATERIAL	Ventilated Aluminium cooling with polished reflector
MOUNTING	Recessed Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	18W
LUMEN FLUX	1800-1500Lm
COLOR	W/ WW/ NW
DIMENSION	D-135 x H-80 mm
CUT-OUT DIA	112mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters etc
ANGLE	5°, 10°, 25°, 30°, 45°


Rs.1,750/-



iLED 24 RDL COB 06

MATERIAL	Ventilated Aluminium cooling with polished reflector
MOUNTING	Recessed Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	24W
LUMEN FLUX	2400-2000Lm
COLOR	W/ WW/ NW
DIMENSION	D-160 X H-97 mm
CUT-OUT DIA	135mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters etc
ANGLE	5°, 10°, 25°, 30°, 45°


Rs.2,600/-

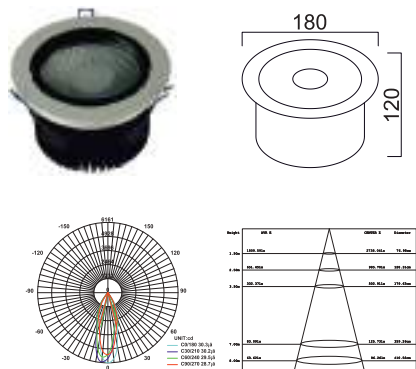

iLED 40 RDL COB 07

MATERIAL	Ventilated Aluminium cooling with polished reflector
MOUNTING	Recessed Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	40W
LUMEN FLUX	4800-4000Lm
COLOR	W/WW
DIMENSION	D-180 X H-120 mm
CUT-OUT DIA	155 mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters etc
ANGLE	5°, 10°, 25°, 30°, 45°

Rs.3,750/-


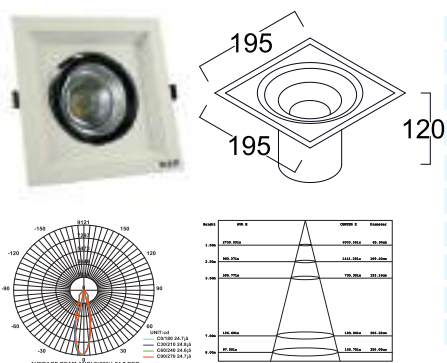


iLED 20/30 SDL COB 08

MATERIAL	Ventilated Aluminum Cooling with polished reflector
MOUNTING	Recessed Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	20W/30W
LUMEN FLUX	2400-2000 Lm
COLOR	W/ WW/ NW
DIMENSION	L-195 X W-195 X H-120 mm
CUT-OUT DIA	165 X 165 mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters etc
ANGLE	5°, 10°, 25°, 30°, 45°

Rs.2,750/- / Rs.3,250/-


iLED 40/60 SDL COB 09

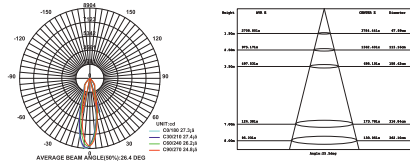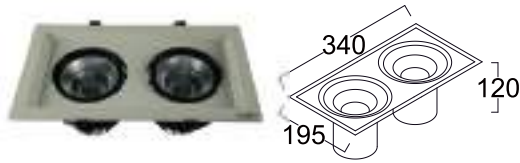

MATERIAL	Ventilated Aluminum Cooling with polished reflector
MOUNTING	Recessed Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	40W/60W
LUMEN FLUX	4800-4000 Lm
COLOR	W/ WW/ NW
DIMENSION	L 340 X W 195 X H 120 mm
CUT-OUT DIA	310 X 165 mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters etc
ANGLE	5°, 10°, 25°, 30°, 45°

Rs.5,500/- / Rs.6,500/-


iLED 10 RDH COB 10 - DEEP DRAWN ADJ

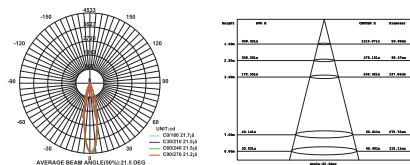

MATERIAL	Ventilated Aluminum Cooling with polished reflector
MOUNTING	Recessed Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	10W
LUMEN FLUX	1200-1000Lm
COLOR	W/ WW/ NW
DIMENSION	D-95 X H-115 mm
CUT-OUT DIA	75 mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters etc
ANGLE	5°, 10°, 25°, 30°, 45°

Rs.1,350/-


iLED 10 RDH COB 11 - DEEP DRAWN ADJ

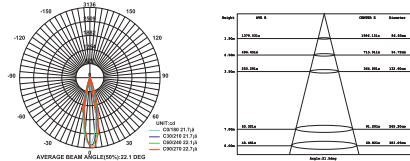

MATERIAL	Ventilated Aluminum Cooling with polished reflector
MOUNTING	Recessed Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	10W
LUMEN FLUX	1200-1000Lm
COLOR	W/ WW/ NW
DIMENSION	D-95 X H-115 mm
CUT-OUT DIA	75 mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters etc
ANGLE	5°, 10°, 25°, 30°, 45°

Rs.1,350/-


NEW

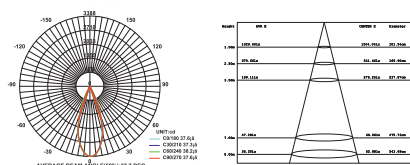

iLED 15 RDH COB 12 - DEEP DRAWN ADJ **LUXPRO**

MATERIAL	Ventilated Aluminum Cooling with polished reflector
MOUNTING	Recessed Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	15W
LUMEN FLUX	1800-1500Lm
COLOR	W/ WW/ NW
DIMENSION	D-95 X H-90 mm
CUT-OUT DIA	75/85 mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters etc
ANGLE	5°, 10°, 25°, 30°, 45°


Rs.1,750/-

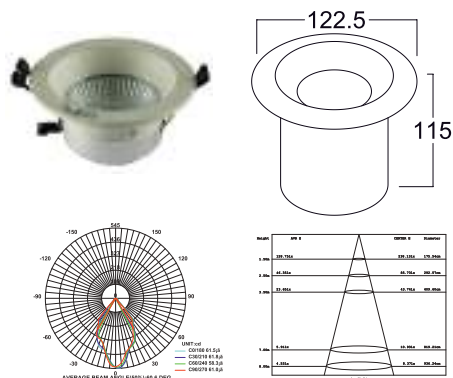

iLED 5 RDL NA COB 13 ECO

MATERIAL	Ventilated Aluminum Cooling with polished reflector
MOUNTING	Recessed Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	5W
LUMEN FLUX	600-500Lm
COLOR	W/ WW/ NW
DIMENSION	D-122.5 x H-115mm
CUT-OUT DIA	92.5mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters etc
ANGLE	5°, 10°, 25°, 30°, 45°


Rs.675/-

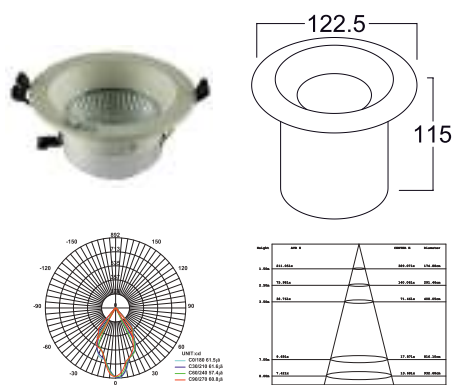

iLED 7 RDL NA COB 14 ECO

MATERIAL	Ventilated Aluminum Cooling with polished reflector
MOUNTING	Recessed Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	7W
LUMEN FLUX	840-700Lm
COLOR	W/ WW/ NW
DIMENSION	D-122.5 x H-115mm
CUT-OUT DIA	92.5mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters etc
ANGLE	5°, 10°, 25°, 30°, 45°


Rs.750/-

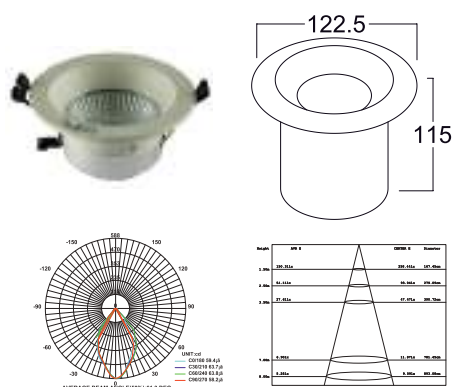

iLED 9 RDL NA COB 15 ECO

MATERIAL	Ventilated Aluminum Cooling with polished reflector
MOUNTING	Recessed Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	9W
LUMEN FLUX	1080-900Lm
COLOR	W/ WW/ NW
DIMENSION	D-122.5 x H-115mm
CUT-OUT DIA	92.5mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters etc
ANGLE	5°, 10°, 25°, 30°, 45°


Rs.850/-

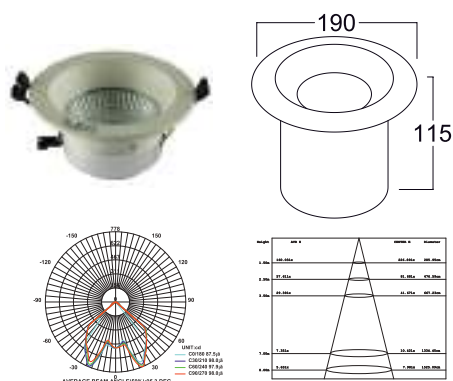

iLED 12 RDL NA COB 16 ECO

MATERIAL	Ventilated Aluminum Cooling with polished reflector
MOUNTING	Recessed Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	12W
LUMEN FLUX	1440-1200 Lm
COLOR	W/ WW/ NW
DIMENSION	D-190 X H-115mm
CUT-OUT DIA	155mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters etc
ANGLE	5°, 10°, 25°, 30°, 45°


Rs.1,000/-

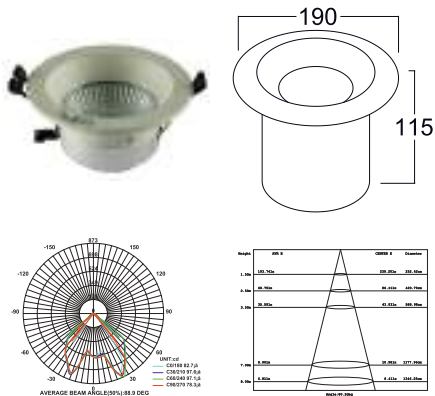

iLED 15 RDL NA COB 17 ECO

MATERIAL	Ventilated Aluminum Cooling with polished reflector
MOUNTING	Recessed Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	15W
LUMEN FLUX	1800-1500 Lm
COLOR	W/ WW/ NW
DIMENSION	D-190 X H-115mm
CUT-OUT DIA	155mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters etc
ANGLE	5°, 10°, 25°, 30°, 45°

Rs.1,350/-

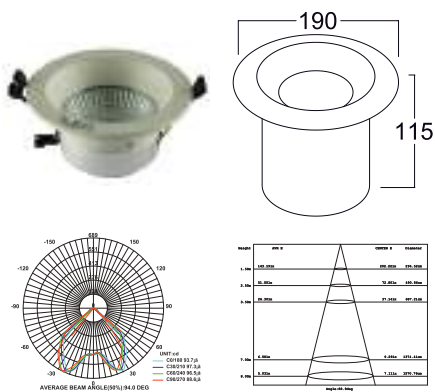

iLED 18 RDL NA COB 18 ECO

MATERIAL	Ventilated Aluminum Cooling with polished reflector
MOUNTING	Recessed Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	18W
LUMEN FLUX	2160-1800 Lm
COLOR	W/ WW/ NW
DIMENSION	D-190 X H-115mm
CUT-OUT DIA	155mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters etc
ANGLE	5°, 10°, 25°, 30°, 45°

Rs.1,550/-

NEW



iLED 10-12 RDL NA COB 19 - DEEP DRAWN LUXPRO®

MATERIAL	Thin Frame and Ventilated Aluminum Cooling with polished reflector
MOUNTING	Recessed Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	12W
LUMEN FLUX	1200-1000 Lm
COLOR	W/ WW/ NW
DIMENSION	D-73 X H-125mm
CUT-OUT DIA	61mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters etc
ANGLE	5°, 10°, 25°, 30°, 45°

Rs.1,366/-

NEW






iLED 20-30 RDL NA COB 20 - DEEP DRAWN LUXPRO®

MATERIAL	Thin Frame and Ventilated Aluminum Cooling with polished reflector
MOUNTING	Recessed Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	20-30W
LUMEN FLUX	2400-2000 Lm
COLOR	W/ WW/ NW
DIMENSION	D-85 X H-130mm
CUT-OUT DIA	73mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters etc
ANGLE	5°, 10°, 25°, 30°, 45°

Rs.2,884/-

NEW






iLED 30-40 RDL NA COB 21 - DEEP DRAWN LUXPRO®

MATERIAL	Thin Frame and Ventilated Aluminum Cooling with polished reflector
MOUNTING	Recessed Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	30-40W
LUMEN FLUX	3600-3000 Lm
COLOR	W/ WW/ NW
DIMENSION	D-110 X H-150mm
CUT-OUT DIA	98mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters etc
ANGLE	5°, 10°, 25°, 30°, 45°

Rs.3,500/-

NEW






iLED 40-50 RDL NA COB 22 - DEEP DRAWN LUXPRO®

MATERIAL	Thin Frame and Ventilated Aluminum Cooling with polished reflector
MOUNTING	Recessed Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	40-50W
LUMEN FLUX	4800-4000 Lm
COLOR	W/ WW/ NW
DIMENSION	D-132 X H-180mm
CUT-OUT DIA	120mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters etc
ANGLE	5°, 10°, 25°, 30°, 45°

Rs.5,710/-


NEW



iLED 60-80 RDL NA COB 23 - DEEP DRAWN LUXPRO®

MATERIAL	Thin Frame and Ventilated Aluminum Cooling with polished reflector
MOUNTING	Recessed Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	60-80W
LUMEN FLUX	7200-6000 Lm
COLOR	W/ WW/ NW
DIMENSION	D-173 X H-200mm
CUT-OUT DIA	161mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters etc
ANGLE	5°, 10°, 25°, 30°, 45°


Rs.7,733/-

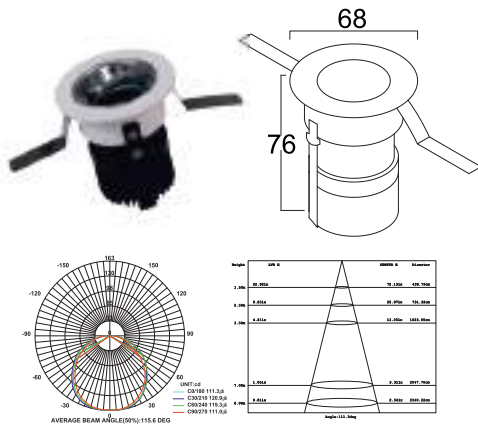

iLED 07 RDH COB 24 ADJ

MATERIAL	Ventilated Aluminum Cooling with Reflector
MOUNTING	Recess Mount
I/P VOLTAGE	230V AC, 50/60Hz
RATED POWER	7W
LUMEN FLUX	840-700 Lm
COLOR	W/ WW / NW
DIMENSION	D-68 X H-76 mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters
ANGLE	5°, 10°, 25°, 30°, 45°


Rs.1,150/-

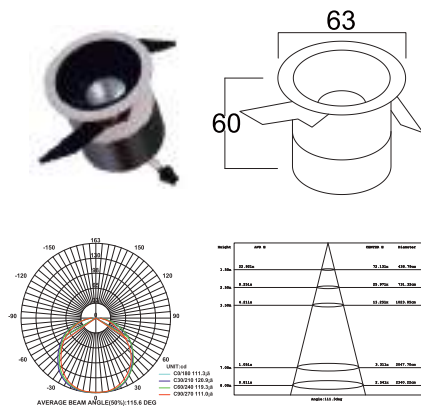

iLED 07 RDL NA COB 25

MATERIAL	Ventilated Aluminum Cooling with Reflector
MOUNTING	Recess Mount
I/P VOLTAGE	230V AC, 50/60Hz
RATED POWER	7W
LUMEN FLUX	840-700 Lm
COLOR	W/ WW / NW
DIMENSION	D-63 X H-60 mm
DIMENSION BOX	Hotel, Show room, Home, Office,
APPLICATION	Auditorium, Theaters
ANGLE	5°, 10°, 25°, 30°, 45°


Rs.1,150/-

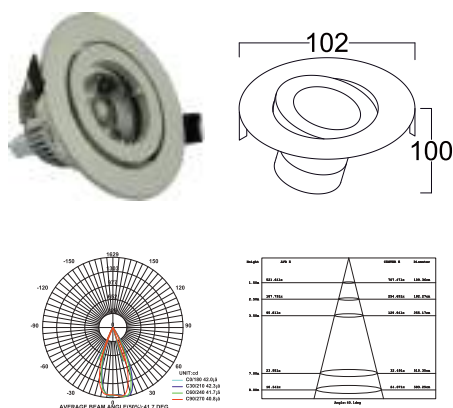

iLED 8 RGBL 01 - RETROFIT

MATERIAL	Aluminium alloy die casting
MOUNTING	Recessed Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	8W
LUMEN FLUX	960-800 Lm
COLOR	W/WW/ NW
DIMENSION	D-102 X H-100mm
CUT-OUT DIA	D-86mm
APPLICATION	Hotel, Showroom, Home, Office, Auditorium, Theatres Etc
ANGLE	5°, 10°, 25°, 30°, 45°


Rs.1,199/-

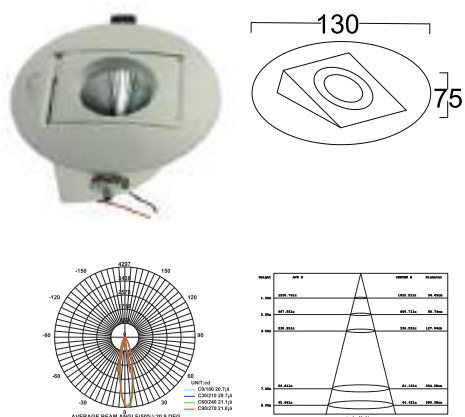

iLED 15 RGBL 02

MATERIAL	Aluminium alloy die casting
MOUNTING	Recessed Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	15W
LUMEN FLUX	1800-1500 Lm
COLOR	W/WW/ NW
DIMENSION	D-130 X H-75mm
CUT-OUT DIA	D-108mm
APPLICATION	Hotel, Showroom, Home, Office, Auditorium, Theatres Etc
ANGLE	5°, 10°, 25°, 30°, 45°


Rs.1,750/-

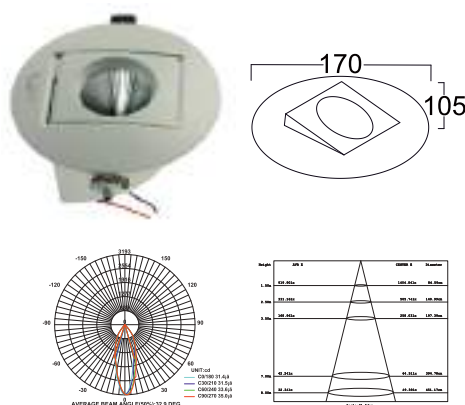

iLED 25 RGBL 03

MATERIAL	Aluminium alloy die casting
MOUNTING	Recessed Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	25W
LUMEN FLUX	3000-2500 Lm
COLOR	W/WW/ NW
DIMENSION	D-170 X H-105mm
CUT-OUT DIA	D-148mm
APPLICATION	Hotel, Showroom, Home, Office, Auditorium, Theatres Etc
ANGLE	5°, 10°, 25°, 30°, 45°

Rs.2,925/-

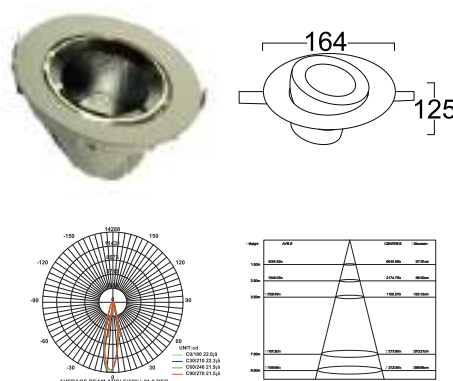


iLED 25 RGBL 04

MATERIAL	Aluminium alloy die casting
MOUNTING	Recessed Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	25W
LUMEN FLUX	3000-2500 Lm
COLOR	W/WW/ NW
DIMENSION	D-164 X H-125mm
CUT-OUT DIA	D-144mm
APPLICATION	Hotel, Showroom, Home, Office, Auditorium, Theatres Etc
ANGLE	5°, 10°, 25°, 30°, 45°

Rs.2,925/-


iLED 4A3 RGB RF 01



MATERIAL	Aluminium Cover
I/P VOLTAGE	I/P VOLTAGE : DC5V, 12V, 18V, 24V
OUTPUT CURRENT	4A*3 Channel
FEATURES	Wireless & Remote with 6 keys
OUTPUT POWER	60W(5V), 144W(12V), 288W(24V)
TYPE	Rf controller
DIMENSION	L-95 X W-67 X H-26 mm

Rs.1,791/-


iLED 4A3 RGB RF 02



MATERIAL	Aluminium Cover
I/P VOLTAGE	DC5V, 12V, 18V, 24V
OUTPUT CURRENT	4A*3 Channel
FEATURES	Wireless & Remote with 6 keys
OUTPUT POWER	60W(5V), 144W(12V), 288W(24V)
TYPE	Rf controller
DIMENSION	L-60 X W-95 X H-28 mm

Rs.1,900/-


iLED 6A3 RGB 308 RF 03



MATERIAL	ABS
I/P VOLTAGE	DC5V, 12V, 18V, 24V
OUTPUT CURRENT	6A*3 Channel
FEATURES	Wireless & Remote with 6 keys
OUTPUT POWER	90W(5V), 216W(12V), 432W(24V)
TYPE	Rf controller
DIMENSION	L-128 X W-64 X H-24 mm

Rs.1,900/-


iLED 6A3 RGB 308 RF 04



MATERIAL	ABS
I/P VOLTAGE	12-24V DC
OUTPUT CURRENT	6A*3 Channel
FEATURES	Wireless & Remote with Touch
OUTPUT POWER	216W(12V), 432W(24V)
TYPE	Rf controller
DIMENSION	L-85 X W-45 X H-24 mm
DISTANCE	30 Meters

Rs.1,550/-


iLED WIFI CONTROLLER 05 RGB / RGBW



MATERIAL	ABS
I/P VOLTAGE	DC 5V
OUTPUT CURRENT	6A / Channel
OUTPUT POWER	90W(5V)
DIMENSION	L-36 X W-45 X H-27mm
APPLICATION	IOS & Andriod Mobile Control

Rs.1,550/-


iLED WIFI CONTROLLER 06 RGB / RGBW



MATERIAL	ABS
I/P VOLTAGE	12-24V DC
OUTPUT CURRENT	6A / Channel
OUTPUT POWER	144W(12V), 288W(24V)
DIMENSION	L-85 X W-45 X H-27mm
APPLICATION	IOS & Andriod Mobile Control

Rs.1,550/-


iLED 6A2 W+WW RF 07



MATERIAL	Powder Coated Aluminium
I/P VOLTAGE	12-24V DC
OUTPUT CURRENT	6A*2 Channel
FEATURES	Wireless & Remote with Touch
OUTPUT POWER	144W(12V),288W(24V)
TYPE	Rf controller
DIMENSION	L-83 X W-79 X H-33 mm
DISTANCE	20 Meters

Rs.1,450/-


iLED TOUCH DIMMER 08



MATERIAL	ABS
I/P VOLTAGE	110 / 220V AC
OUTPUT CURRENT	1A
NO OF CHANNELS	1
FEATURES	Touch
OUTPUT POWER	110W(110V), 220W(220V)
DIMENSION	L-72 X W-120 X H-42mm

Rs.4,500/-


iLED DIMMER 09

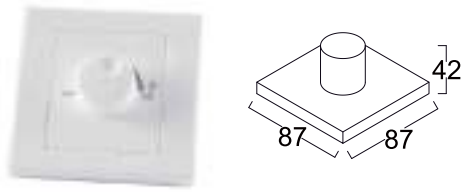

MATERIAL	ABS
I/P VOLTAGE	220V AC
OUTPUT CURRENT	3A
NO OF CHANNELS	1
FEATURES	Regulator Type
OUTPUT POWER	Max 600W
DIMENSION	L-87 X W-87 X H-42mm

Rs.1,500/-

iLED DIML 1-7-168-IR 10

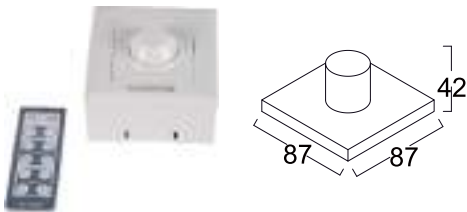

MATERIAL	ABS
I/P VOLTAGE	DC12V, 24V
OUTPUT CURRENT	7 A/CH
NO OF CHANNELS	1
OUTPUT POWER	84--168 W
DIMENSION MODE	SCR
DIMENSION	L-87 X W-87 X H-57mm

Rs.1,750/-

iLED RP-307 11



MATERIAL	Aluminium Cover
I/P VOLTAGE	DC12V,24V
OUTPUT CURRENT	5/8 (Max) A/CH
NO OF CHANNELS	3/Power Amplifier
OUTPUT POWER	180-360 W

Rs.1,250/-

iLED DMX 512 ISOLATED SPLITTER-LT123



MATERIAL	DC 12V
DISTANCE	Max 300meters
DIMENSION	192X W-80 X H-40 mm
APPLICATION	Signal Amplifier & Splitter


Rs.19,750/-



iLED DMX 705 DECODER/ENCODER

MATERIAL	DC5V, 12V, 18V, 24V
OUTPUT POWER	1000W

Rs.5,500/-

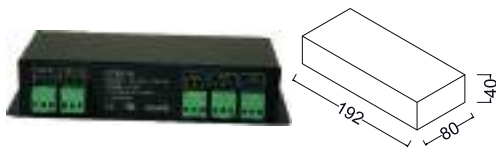

iLED 123 SIGNAL AMPLIFIER

INPUT	12VDC with an adapter(100-240VAC - 12V DC)
INPUT DMX SIGNAL	CH DMX (485) SIGNAL OUTPUT
OUTPUT DMX SIGNAL	3 CH DMX (485) SIGNAL OUTPUT
DMX512 SOCKET	3-Pin XLR
WORKING TEMP	-30deg C - +60deg C
DIMENSION	L-192 X W-80 X H-41 mm
DIMENSION BOX	L-260 X W-132 X H-46 mm
APPLICATION	Controller for the RGB LED

Rs.19,750/-


iLED DMX 800



INPUT	12VDC with an adapter (100-240VAC - 12V DC)
OUTPUT SIGNAL	DMX 512
OUTPUT LOOP	1 Port
LIGHTING MODE	580 Modes
TRANSMISSION SPEED	250 Kbps
WORKING TEMP	-30deg C - +60deg C
DIMENSION	L-163 X W-108 X H-40 mm
DIMENSION BOX	L-260 X W-132 X H-46 mm
APPLICATION	Controller for the RGB LED

Rs.6,700/-


iLED 2 EL 1EO 01 - RECHARGEABLE

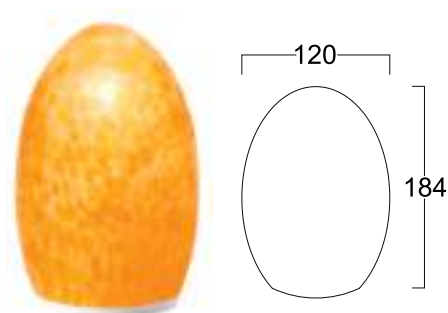

MATERIAL	Handblown lamp shade with ABS light holder
MOUNTING	Desk Top
I/P VOLTAGE	DC 5V
POWER SUPPLY	Adapter with USB Cable
DIMENSION	D-120 X H-184mm
WEIGHT	960gms
WATTS	2W
BATTERY	4000mAH
CHARGING TIME	10Hrs
LIGHTING TIME	10-60Hrs
IP RATING	IP54

Rs.5,400/-


iLED 2 EL 1EG 02 - RECHARGEABLE

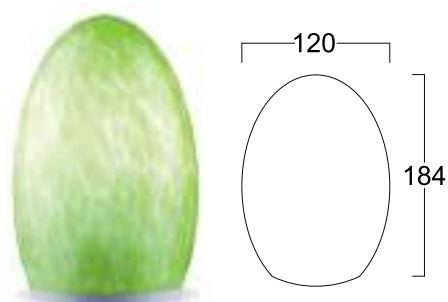

MATERIAL	Handblown lamp shade with ABS light holder
MOUNTING	Desk Top
I/P VOLTAGE	DC 5V
POWER SUPPLY	Adapter with USB Cable
DIMENSION	D-120 X H-184mm
WEIGHT	960gms
WATTS	2W
BATTERY	4000mAH
CHARGING TIME	10Hrs
LIGHTING TIME	10-60Hrs
IP RATING	IP54

Rs.5,400/-


iLED 2 EL 03 1EB - RECHARGEABLE

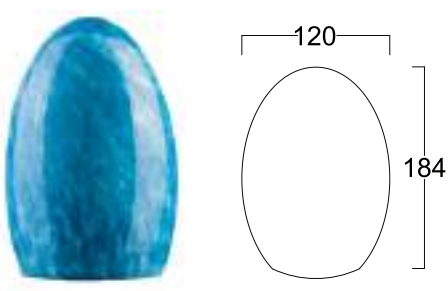

MATERIAL	Handblown lamp shade with ABS light holder
MOUNTING	Desk Top
I/P VOLTAGE	DC 5V
POWER SUPPLY	Adapter with USB Cable
DIMENSION	D-120 X H-184mm
WEIGHT	960gms
WATTS	2W
BATTERY	4000mAH
CHARGING TIME	10Hrs
LIGHTING TIME	10-60Hrs
IP RATING	IP54

Rs.5,400/-


iLED 2 EL 1EH 04 - RECHARGEABLE

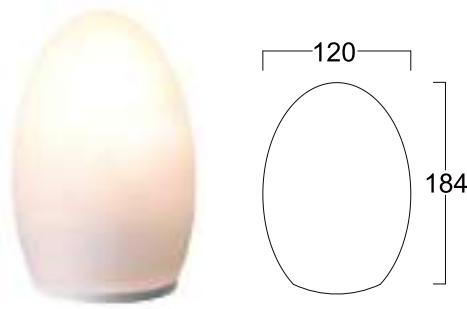

MATERIAL	Handblown lamp shade with ABS light holder
MOUNTING	Desk Top
I/P VOLTAGE	DC 5V
POWER SUPPLY	Adapter with USB Cable
DIMENSION	D-120 X H-184mm
WEIGHT	960gms
WATTS	2W
BATTERY	4000mAH
CHARGING TIME	10Hrs
LIGHTING TIME	10-60Hrs
IP RATING	IP54

Rs.5,400/-

iLED 1 CL 01 WW 05 - RECHARGEABLE

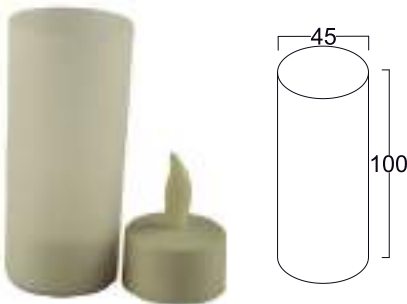




MATERIAL	Abs plastic with poly carbonate case
MOUNTING	Table Top
I/P VOLTAGE	230VAC,50/60Hz
RATED POWER	6W set of 6 No's
COLOR	WW
DIMENSION	D-45 mm X H-100 mm
APPLICATION	Hotel, Restaurant, Temple, Pooja Rooms, Houses, Parties

Rs.2,700/-

CUPBOARD LIGHTS



NEW






iLED 5 CBL 01

MATERIAL	Ventilated Powder coated Aluminum with clear Lens
MOUNTING	Surface Mount
I/P VOLTAGE	230VAC,50/60Hz
RATED POWER	5W
LUMEN FLUX	600-500 Lm
COLOR	W/WW/NW
DIMENSION	D-75 X H-17 mm
APPLICATION	Cupboard / Kitchen Cabinet
ANGLE	5°, 10°, 25°, 30°, 45°

Rs.600/-

NEW






iLED 5 CBL 02

MATERIAL	Ventilated Aluminum Cooling with Milky Diffuser
MOUNTING	Surface Mount
I/P VOLTAGE	30VAC,50/60Hz
RATED POWER	5W
LUMEN FLUX	600-500 Lm
COLOR	W/WW/NW
DIMENSION	L-110 X W-40 X H-10 mm
APPLICATION	Cupboard / Kitchen Cabinet

Rs.275/-

NEW





iLED 10 CBL 03

MATERIAL	Ventilated Aluminum Cooling with Milky Diffuser
MOUNTING	Surface Mount
I/P VOLTAGE	230VAC,50/60Hz
RATED POWER	10W
LUMEN FLUX	1200-1000 Lm
COLOR	W/WW/NW
DIMENSION	L-205 X W-40 X H-10 mm
APPLICATION	Cupboard / Kitchen Cabinet

Rs.475/-

NEW




iLED 1 DOL 01 LUXPRO®

MATERIAL	Ventilated powder coated Die cast Aluminum with Lens & PMMA Clear /Milky Diffuser
MOUNTING	Outdoor Floor Mount
I/P VOLTAGE	24V DC
RATED POWER	1W
LUMEN FLUX	120-100Lm
COLOR	W/WW/NW
DIMENSION	L-100 X W- 50 X H-30 mm
APPLICATION	Sign, facade, area, accent and general security lighting, Garden Etc
ANGLE	5°, 10°, 25°, 30°, 45°

Rs.3,500/-

NEW





iLED 1+1 DOL 02 LUXPRO®

MATERIAL	Ventilated powder coated Die cast Aluminum with Lens & PMMA Clear /Milky Diffuser
MOUNTING	Outdoor Floor Mount
I/P VOLTAGE	24V DC
RATED POWER	2W
LUMEN FLUX	240-200Lm
COLOR	W/WW/NW
DIMENSION	L-100 X W- 50 X H-30 mm
APPLICATION	Sign, facade, area, accent and general security lighting, Garden Etc
ANGLE	5°, 10°, 25°, 30°, 45°

Rs.4,000/-

NEW




iLED 3 DOL 03 LUXPRO®

MATERIAL	Ventilated powder coated Die cast Aluminum with Lens & PMMA Clear /Milky Diffuser
MOUNTING	Outdoor Floor Mount
I/P VOLTAGE	24V DC
RATED POWER	3W
LUMEN FLUX	360-100Lm
COLOR	W/WW/NW
DIMENSION	L-100 X W- 50 X H-30 mm
APPLICATION	Sign, facade, area, accent and general security lighting, Garden Etc
ANGLE	5°, 10°, 25°, 30°, 45°

Rs.4,500/-

NEW






iLED 3+3 DOL 04 LUXPRO®

MATERIAL	Ventilated powder coated Die cast Aluminum with Lens & PMMA Clear /Milky Diffuser
MOUNTING	Outdoor Floor Mount
I/P VOLTAGE	24V DC
RATED POWER	6W
LUMEN FLUX	720-100Lm
COLOR	W/WW/NW
DIMENSION	L-100 X W- 50 X H-30 mm
APPLICATION	Sign, facade, area, accent and general security lighting, Garden Etc
ANGLE	5°, 10°, 25°, 30°, 45°

Rs.5,000/-

NEW






iLED 10 OL 01 LUXPRO®

MATERIAL	Ventilated powder coated Die cast Aluminum with tempered glass & reflector
MOUNTING	Surface Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	10 W
LUMEN FLUX	1200 - 1000Lm
COLOR	W/WW/NW
DIMENSION	L-150mm X W-70 X H-145 mm
APPLICATION	Sign, facade, area, accent and general security lighting
ANGLE	5°, 10°, 25°, 30°, 45°

Rs.2,300/-

NEW






iLED 20 OL 02 LUXPRO®

MATERIAL	Ventilated powder coated Die cast Aluminum with tempered glass & reflector
MOUNTING	Surface Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	20 W
LUMEN FLUX	2400- 2000Lm
COLOR	W/WW/NW
DIMENSION	L-215mm X W-103 X H-235 mm
APPLICATION	Sign, facade, area, accent and general security lighting
ANGLE	5°, 10°, 25°, 30°, 45°

Rs.6,150/-

NEW






iLED 30 OL 03 LUXPRO®

MATERIAL	Ventilated powder coated Die cast Aluminum with tempered glass & reflector
MOUNTING	Surface Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	30W
LUMEN FLUX	3600- 3000Lm
COLOR	W/WW/NW
DIMENSION	L-215 X W-103 X H-235 mm
APPLICATION	Sign, facade, area, accent and general security lighting
ANGLE	5°, 10°, 25°, 30°, 45°

Rs.7,500/-

NEW






iLED 40 OL 04 LUXPRO®

MATERIAL	Ventilated powder coated Die cast Aluminum with tempered glass & reflector
MOUNTING	Surface Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	40W
LUMEN FLUX	4800- 4000Lm
COLOR	W/WW/NW
DIMENSION	W-130 X H-300 X L-280mm
APPLICATION	Sign, facade, area, accent and general security lighting
ANGLE	5°, 10°, 25°, 30°, 45°

Rs.9,450/-

NEW






iLED 50 OL 05 LUXPRO®

MATERIAL	Ventilated powder coated Die cast Aluminum with tempered glass & lens
MOUNTING	Surface Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	50W
LUMEN FLUX	6000 - 5000Lm
COLOR	W/WW/NW
DIMENSION	W-130 X H-300 X L-280mm
APPLICATION	Sign, facade, area, accent and general security lighting

Rs.10,500/-

NEW






iLED 12 / 18 OL 06 LUXPRO®

MATERIAL	Ventilated powder coated Die cast Aluminum with tempered glass & lens
MOUNTING	Surface Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	12 / 18W
LUMEN FLUX	1440-1200 / 2160 - 1800Lm
COLOR	W/WW/NW
DIMENSION	L-130 X W-120 X H-150mm
APPLICATION	Sign, facade, area, accent and general security lighting

Rs.5,000/-

NEW






iLED 24 / 36 OL 07 LUXPRO®

MATERIAL	Ventilated powder coated Die cast Aluminum with tempered glass & lens
MOUNTING	Surface Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	12 / 18W
LUMEN FLUX	2880-2400 / 4320 - 3600Lm
COLOR	W/WW/NW
DIMENSION	D-150 X H-210mm
APPLICATION	Sign, facade, area, accent and general security lighting
NARROW BEAM	3°, 5°, 10° and Other Optical Angle

Rs.10,000/-

NEW






iLED 45 / 60 OL 08 LUXPRO®

MATERIAL	Ventilated powder coated Diecast Aluminum with tempered glass & lens
MOUNTING	Surface Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	45 / 60W
LUMEN FLUX	5400-4500 / 7200 - 6000Lm
COLOR	W/WW/NW
DIMENSION	L-160 X W-160 X H-160mm
APPLICATION	Sign, facade, area, accent and general security lighting
NARROW BEAM	3°, 5°, 10° and Other Optical Angle

Rs.15,000/-

NEW






iLED 80 OL 09 LUXPRO®

MATERIAL	Ventilated powder coated Die cast Aluminum with tempered glass & lens
MOUNTING	Surface Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	80W
LUMEN FLUX	9600 - 8000Lm
COLOR	W/WW/NW
DIMENSION	L-200 X W-200 X H-440mm
APPLICATION	Sign, facade, area, accent and general security lighting
NARROW BEAM	3°, 5°, 10° and Other Optical Angle

Rs.22,000/-




NEW



iLED 6 U / D OD 10 LUXPRO®

MATERIAL	Ventilated Powder coated Die cast Aluminium with Narrow Beam Lens
MOUNTING	Surface Mount
I/P VOLTAGE	230V AC, 50/60Hz
RATED POWER	6W
LUMEN FLUX	360-270Lm
COLOR	W/WW/NW
DIMENSION	D-63 X H-90mm
APPLICATION	Outdoor, Garden & Wall light etc.
NARROW BEAM	3°, 5°, 10° and Other Optical Angle




Rs.2,700/-



iLED 30 FL EC 001

MATERIAL	Ventilated Aluminium with Reflector and Tempered Glass
I/P VOLTAGE	200-265V AC, 50/60 Hz
POWER	30W
LUMEN FLUX	3600-3000 Lm
DIMENSION	L-227 X W-240 X H-45 mm
COLOR	W/WW/NW
APPLICATION	Facade, Hoarding, Name Board, Building, Tunnel, Petrol Bunk Stage Etc




Rs.1,510/-



iLED 50 FL EC 002

MATERIAL	Ventilated Aluminium with Reflector and Tempered Glass
I/P VOLTAGE	200-265V AC, 50/60 Hz
POWER	Power : 50W
LUMEN FLUX	6000-5000 Lm
DIMENSION	L-284 X W-300 X H-60 mm
COLOR	W/WW/NW
APPLICATION	Facade, Hoarding, Name Board, Building, Tunnel, Petrol Bunk Stage Etc




Rs.2,295/-



iLED 100 FL EC 003

MATERIAL	Ventilated Aluminium with Reflector and Tempered Glass
I/P VOLTAGE	200-265V AC, 50/60 Hz
POWER	100W
LUMEN FLUX	12000-10000 Lm
DIMENSION	L-284 X W-300 X H-65 mm
COLOR	W/WW/NW
APPLICATION	Facade, Hoarding, Name Board, Building, Tunnel, Petrol Bunk Stage Etc


Rs.4,041/-



iLED 100 FL EC 003A

MATERIAL	Ventilated Aluminium with Reflector and Tempered Glass
I/P VOLTAGE	200-265V AC, 50/60 Hz
POWER	100W
LUMEN FLUX	12000-10000 Lm
DIMENSION	L-400 X W-300 X H-85 mm
COLOR	W/WW/NW
APPLICATION	Facade, Hoarding, Name Board, Building, Tunnel, Petrol Bunk Stage Etc


Rs.4,647/-

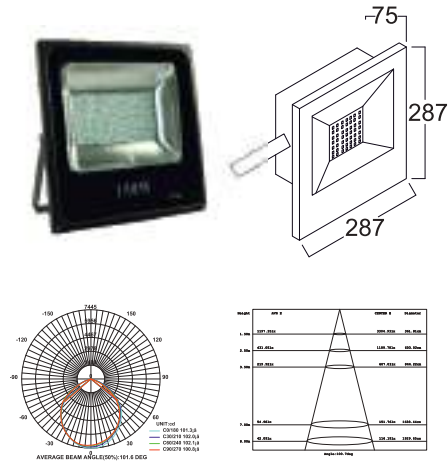

iLED 150 FL EC 004

MATERIAL	Ventilated Aluminium with Reflector and Tempered Glass
I/P VOLTAGE	200-265V AC, 50/60 Hz
POWER	150W
LUMEN FLUX	18000-15000 Lm
DIMENSION	L-287 X W-287 X H-75 mm
COLOR	W/WW/NW
APPLICATION	Facade, Hoarding, Name Board, Building, Tunnel, Petrol Bunk Stage Etc


Rs.6,835/-

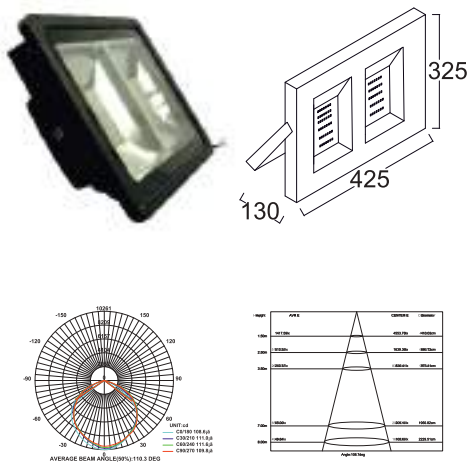

iLED 200 FL EC 005

MATERIAL	Ventilated Aluminium with Reflector and Tempered Glass
I/P VOLTAGE	200-265V AC, 50/60 Hz
POWER	200W
LUMEN FLUX	24000-20000 Lm
DIMENSION	L-425 X W-325 X H-130 mm
COLOR	W/WW/NW
APPLICATION	Facade, Hoarding, Name Board, Building, Tunnel, Petrol Bunk Stage Etc


Rs.9,068/-

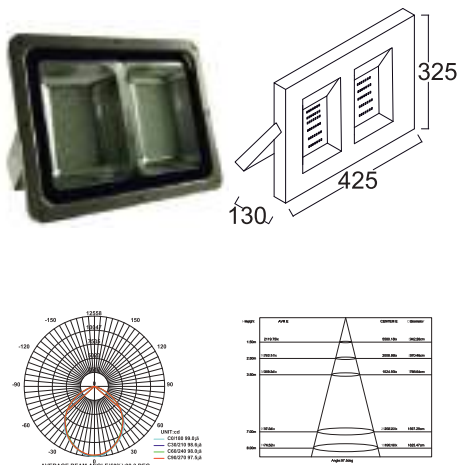

iLED 300 FL EC 006

MATERIAL	Ventilated Aluminium with Reflector and Tempered Glass
I/P VOLTAGE	200-265V AC, 50/60 Hz
POWER	300W
LUMEN FLUX	36000-30000 Lm
DIMENSION	L-425 X W-325 X H-130 mm
COLOR	W/WW/NW
APPLICATION	Facade, Hoarding, Name Board, Building, Tunnel, Petrol Bunk Stage Etc




Rs.16,516/-

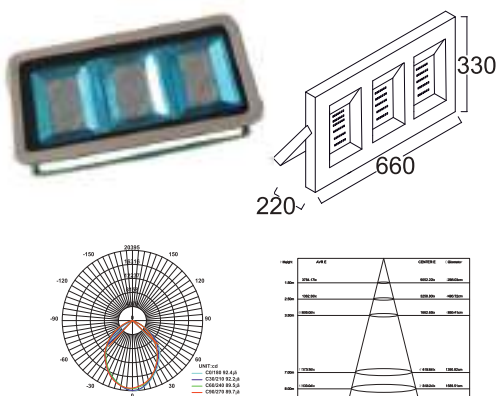

iLED 450 FL EC 007

MATERIAL	Ventilated Aluminium with Reflector and Tempered Glass
I/P VOLTAGE	200-265V AC, 50/60 Hz
POWER	400W
LUMEN FLUX	48000-40000 Lm
DIMENSION	L-660 X W-330 X H-220 mm
COLOR	W/WW/NW
APPLICATION	Facade, Hoarding, Name Board, Building, Tunnel, Petrol Bunk Stage Etc




Rs.26,235/-



iLED 18 FL 008

MATERIAL	Ventilated Aluminium with Reflector and Tempered Glass
I/P VOLTAGE	200-265V AC, 50/60 Hz
POWER	18W
LUMEN FLUX	2160-1800 Lm
DIMENSION	L-280 X W-210 X H-160 mm
COLOR	W/WW/NW
APPLICATION	Facade, Hoarding, Name Board, Building, Tunnel, Petrol Bunk Stage Etc




Rs.1,000/-



iLED 40 FL 009

MATERIAL	Ventilated Aluminium with Reflector and Tempered Glass
I/P VOLTAGE	200-265V AC, 50/60 Hz
POWER	40W
LUMEN FLUX	4800-4000 Lm
DIMENSION	L-312 X W-165 X H-59 mm
COLOR	W/WW/NW
APPLICATION	Facade, Hoarding, Name Board, Building, Tunnel, Petrol Bunk Stage Etc
ANGLE	5°, 10°, 25°, 30°, 45°

Rs.6,200/-





iLED 40 FL 010

MATERIAL	Ventilated powder coated Diecast Aluminum with PMMA lens (optional) & tempered glass
MOUNTING	Angular Mounting
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	40W
LUMEN FLUX	4800-4000Lm
DIMENSION	W/WW/NW
COLOR	L-312 X W-165 X H-59 mm
APPLICATION	Facade, Hoarding, Name Board, Building, Tunnel, Petrol Bunk Stage Etc
ANGLE	5°, 10°, 25°, 30°, 45°

Rs.4,900/-

NEW






iLED 12 RDL COB FR 01 LUXPRO®

MATERIAL	Ventilated Aluminum Cooling with Polished Reflector & glass
MOUNTING	Recessed Mount - Adjustable
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	12W
LUMEN FLUX	1440- 1200Lm
COLOR	W/ WW/ NW
DIMENSION	D-90 X H-115mm
CUT-OUT DIA	D-70mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters etc
ANGLE	5°, 10°, 25°, 30°, 45°

Rs.1,750/-

NEW



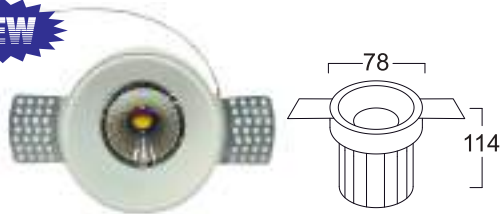


iLED 10 RDL COB FR 02 LUXPRO®

MATERIAL	Ventilated Aluminum Cooling with Polished Reflector & glass
MOUNTING	Recessed Mount - TRIMLESS
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	10W
LUMEN FLUX	1440- 1200Lm
COLOR	W/ WW/ NW
DIMENSION	D-78 X H-115mm
CUT-OUT DIA	D-83mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters etc
ANGLE	5°, 10°, 25°, 30°, 45°

Rs.1,550/-

NEW



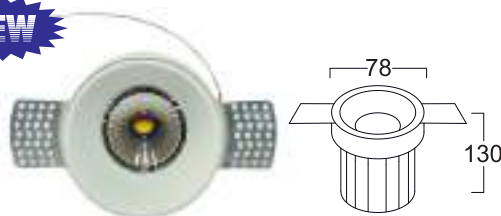


iLED 15 RDL COB FR 03 LUXPRO®

MATERIAL	Ventilated Aluminum Cooling with Polished Reflector & glass
MOUNTING	Recessed Mount - TRIMLESS
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	15W
LUMEN FLUX	1800- 1500Lm
COLOR	W/ WW/ NW
DIMENSION	D-78 X H-130mm
CUT-OUT DIA	D-83mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters etc
ANGLE	5°, 10°, 25°, 30°, 45°

Rs.2,025/-

NEW




iLED 20 RDL COB FR 04 LUXPRO®

MATERIAL	Ventilated Aluminum Cooling with Polished Reflector & glass
MOUNTING	Recessed Mount - TRIMLESS
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	20W
LUMEN FLUX	1400- 2000Lm
COLOR	W/ WW/ NW
DIMENSION	D-78 X H-150 mm
CUT-OUT DIA	D-83mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters etc
ANGLE	5°, 10°, 25°, 30°, 45°

Rs.2,250/-


iLED S-ZH093-Q -ANTI DAZZLE - FR SERIES



TYPE	Adjustable Without Light Source
MATERIAL	Aluminum Die Casting
MOUNTING	RecessMount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	On request
HOLDER	MR16 With External power supply
OUTER DIA	D-96 X H-25 mm
CUT-OUT DIA	76mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters etc

Rs.670/-


iLED S-SCY105-Q -DEEP- FR SERIES



TYPE	Adjustable Without Light Source
MATERIAL	Aluminum Die Casting
MOUNTING	Recess Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	On request
HOLDER	MR16 With External power supply
OUTER DIA	D-103 X H-70 mm
CUT-OUT DIA	93mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters etc

Rs.690/-

NEW

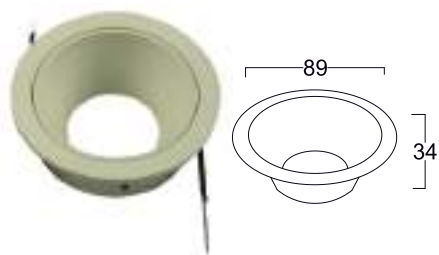

iLED H-090F DEEP- FR SERIES LUXPRO®

TYPE	Adjustable Without Light Source
MATERIAL	Aluminum Die Casting
MOUNTING	Recess Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	On request
HOLDER	MR16 With External power supply
OUTER DIA	89 X H-34mm
CUT-OUT DIA	70mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters etc

Rs.990/-


iLED RRF 1007A - FR SERIES



TYPE	Without Light Source
MATERIAL	Aluminum Die Casting
MOUNTING	Recess Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	On request
HOLDER	MR16 With External power supply
OUTER DIA	82 X H-30mm
CUT-OUT DIA	74mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters etc

Rs.290/-


iLED RRFX 001 - FR SERIES

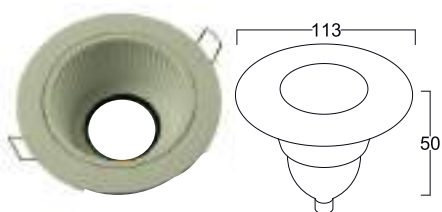

TYPE	Without Light Source
MATERIAL	Aluminum Die Casting
MOUNTING	Recess Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	On request
HOLDER	MR16 With External power supply
OUTER DIA	113 X H-50mm
CUT-OUT DIA	90mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters etc

Rs.534/-

iLED RRHX001- FR SERIES

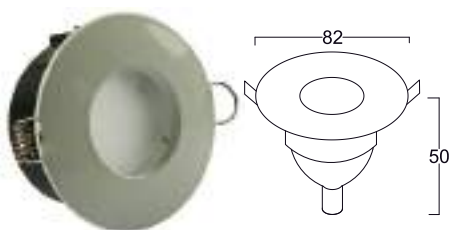

TYPE	Without Light Source
MATERIAL	Aluminum Die Casting
MOUNTING	Recess Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	On request
HOLDER	MR16 With External power supply
OUTER DIA	82 X H-50mm
CUT-OUT DIA	71mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters etc

Rs.807/-


iLED ST 502A



TYPE	Without Light Source
MATERIAL	Aluminum Die Casting
MOUNTING	Recess Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	On request
HOLDER	MR16 With External power supply
OUTER DIA	81 X H-68mm
CUT-OUT DIA	76mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters etc

Rs.350/-

iLED ST 503A - COB DOWNLIGHTS THIN FRAME

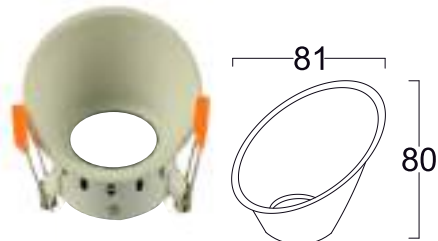

TYPE	Without Light Source
MATERIAL	Aluminum Die Casting
MOUNTING	Recess Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	On request
HOLDER	MR16 With External power supply
OUTER DIA	81 X H-80mm
CUT-OUT DIA	76mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters etc

Rs.350/-




iLED ST T511 - COB DOWNLIGHTS THIN FRAME

TYPE	Without Light Source
MATERIAL	Aluminum Die Casting
MOUNTING	Recess Mount
I/P VOLTAGE	I/P VOLTAGE : 230VAC, 50/60Hz
RATED POWER	RATED POWER : On request
HOLDER	MR16 With External power supply
OUTER DIA	L-85 X W-85 X H-33mm
CUT-OUT DIA	70mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters etc

Rs.320/-


iLED 9 RRF W/WW

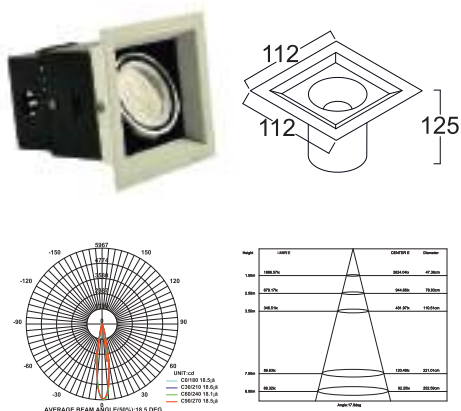

TYPE	Non Removable
MATERIAL	Aluminum Die Casting
MOUNTING	Recess Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	On request
DIMENSION	112 X 112 X 125mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters etc


Rs.1,120/-

iLED 2x9 RRF W/WW

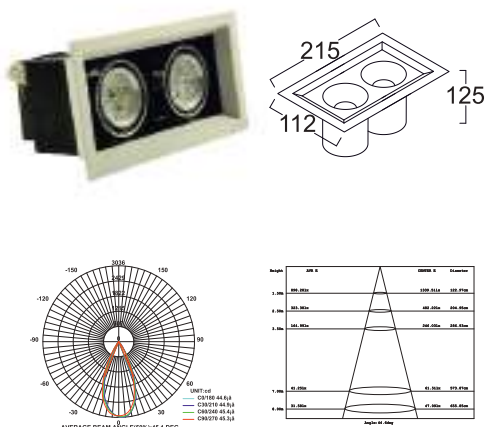

TYPE	Non Removable
MATERIAL	Aluminum Die Casting
MOUNTING	Recess Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	On request
DIMENSION	215 X 112 X 125mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters etc


Rs.2,403/-



iLED XJ6128 01

MATERIAL	Material: Aluminum Die Casting Graphite Black Finish
MOUNTING	Surface Mount
DIMENSION	H-700 X D-160 mm
DIMENSION	H-800 mm
APPLICATION	Bollard mounting base with 3mtr pole

Rs.22,000/-



iLED XJ6135 02

MATERIAL	Aluminum Die Casting Graphite Black Finish
MOUNTING	Surface Mount
DIMENSION	H-700 X D-160 mm
DIMENSION	H-630 mm
APPLICATION	Bollard mounting base with 3mtr pole


Rs.21,000/-



iLED XJ6137 03

MATERIAL	Aluminum Die Casting Graphite Black Finish
MOUNTING	Surface Mount
DIMENSION	H-700 X D-160 mm
DIMENSION	H-630 mm
APPLICATION	Bollard mounting base with 3mtr pole


Rs.19,500/-

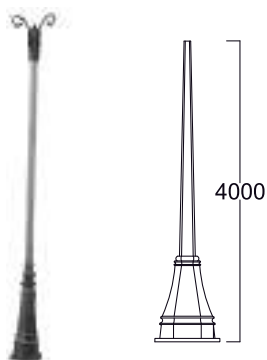

iLED Street light Base 04

MATERIAL	Aluminum Die Casting Graphite Black Finish
MOUNTING	Surface Mount
DIMENSION	H-4000 mm
APPLICATION	Bollard mounting base with 4mtr pole

Rs.33,750/-

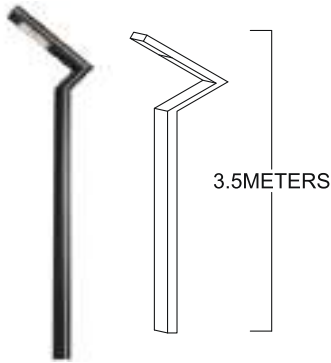

iLED 30 PL 05

MATERIAL	Aluminum Die Casting Graphite Black Finish with Milky Diffuser
MOUNTING	Surface Mount
I/P VOLTAGE	230VAC,50/60Hz
COLOR	W/WW/NW
RATED POWER	30W
LUMEN FLUX	3600-3000Lm
DIMENSION	3.5 Meters
APPLICATION	Pole Lights, Pathway Lights

Rs.30,100/-



iLED 30+20 PL 06

MATERIAL	Aluminum Die Casting Graphite Black Finish with Milky Diffuser
MOUNTING	Surface Mount
I/P VOLTAGE	230VAC,50/60Hz
COLOR	W/WW/NW
RATED POWER	50W
LUMEN FLUX	6000-5000Lm
DIMENSION	3.5 Meters
APPLICATION	Pole Lights, Pathway Lights


Rs.32,800/-



iLED 30+10 PL 07

MATERIAL	Aluminum Die Casting Graphite Black Finish with Milky Diffuser
MOUNTING	Surface Mount
I/P VOLTAGE	230VAC,50/60Hz
COLOR	W/WW/NW
RATED POWER	40W
LUMEN FLUX	4800-4000Lm
DIMENSION	3.5 Meters
APPLICATION	Pole Lights, Pathway Lights

Rs.32,800/-

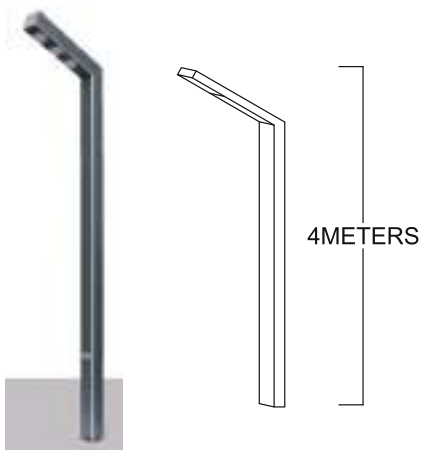

iLED 60 PL 08

MATERIAL	Aluminum Die Casting Graphite Black Finish with Milky Diffuser
MOUNTING	Surface Mount
I/P VOLTAGE	230VAC,50/60Hz
COLOR	W/WW/NW
RATED POWER	60W
LUMEN FLUX	7200-6000Lm
DIMENSION	4 Meters
APPLICATION	Pole Lights, Pathway Lights


Rs.41,000/-



iLED 30 PL 09

MATERIAL	Aluminum Die Casting Graphite Black Finish with Milky Diffuser
MOUNTING	Surface Mount
I/P VOLTAGE	230VAC,50/60Hz
COLOR	W/WW/NW
RATED POWER	30W
LUMEN FLUX	3600-3000Lm
DIMENSION	3.5 Meters
APPLICATION	Pole Lights, Pathway Lights


Rs.39,000/-

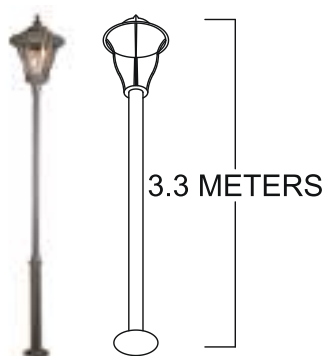

iLED 36 PL 10

MATERIAL	Aluminum Die Casting Graphite Black Finish with Milky Diffuser
MOUNTING	Surface Mount
I/P VOLTAGE	230VAC,50/60Hz
COLOR	W/WW/NW
RATED POWER	36W
LUMEN FLUX	4320-3600Lm
DIMENSION	3.3 Meters
APPLICATION	Pole Lights, Pathway Lights


Rs.36,500/-

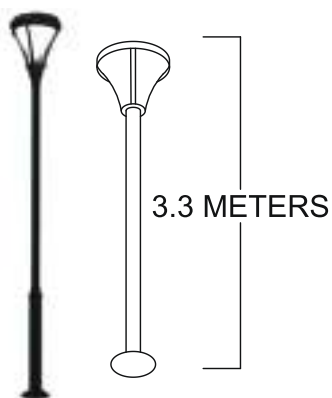

iLED 30 PL 11

MATERIAL	Aluminum Die Casting Graphite Black Finish with Milky Diffuser
MOUNTING	Surface Mount
I/P VOLTAGE	230VAC,50/60Hz
COLOR	W/WW/NW
RATED POWER	30W
LUMEN FLUX	3600-3000Lm
DIMENSION	3.3 Meters
APPLICATION	Pole Lights, Pathway Lights


Rs.32,600/-

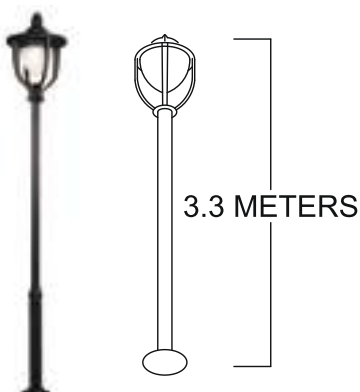

iLED 30 PL 12

MATERIAL	Aluminum Die Casting Graphite Black Finish with Milky Diffuser
MOUNTING	Surface Mount
I/P VOLTAGE	230VAC,50/60Hz
COLOR	W/WW/NW
RATED POWER	30W
LUMEN FLUX	3600-3000Lm
DIMENSION	3.3 Meters
APPLICATION	Pole Lights, Pathway Lights


Rs.32,600/-

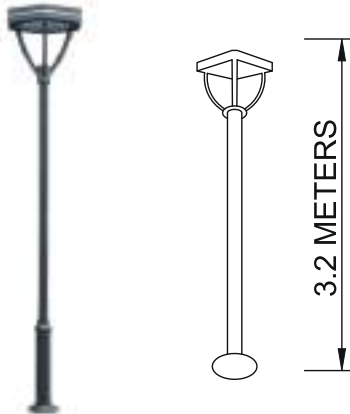

iLED 36 PL 13

MATERIAL	Aluminum Die Casting Graphite Black Finish with Milky Diffuser
MOUNTING	Surface Mount
I/P VOLTAGE	230VAC,50/60Hz
COLOR	W/WW/NW
RATED POWER	36W
LUMEN FLUX	4320-3600Lm
DIMENSION	3.2 Meters
APPLICATION	Pole Lights, Pathway Lights


Rs.33,200/-

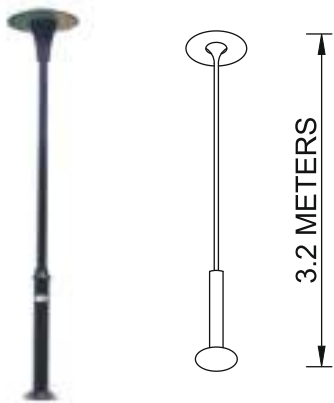

iLED 50 PL 14

MATERIAL	Aluminum Die Casting Graphite Black Finish with Milky Diffuser
MOUNTING	Surface Mount
I/P VOLTAGE	230VAC,50/60Hz
COLOR	W/WW/NW
RATED POWER	50W
LUMEN FLUX	6000-5000Lm
DIMENSION	3.2 Meters
APPLICATION	Pole Lights, Pathway Lights


Rs.30,100/-

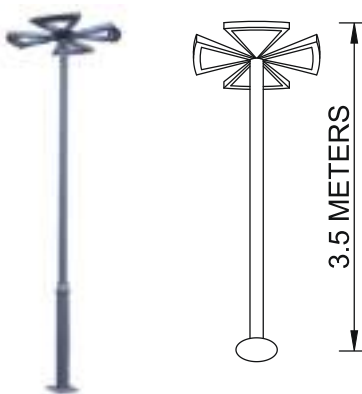

iLED 60 PL 15

MATERIAL	Aluminum Die Casting Graphite Black Finish with Milky Diffuser
MOUNTING	Surface Mount
I/P VOLTAGE	230VAC,50/60Hz
COLOR	W/WW/NW
RATED POWER	60W
LUMEN FLUX	7200-6000Lm
DIMENSION	3.3 Meters
APPLICATION	Pole Lights, Pathway Lights


Rs.41,000/-

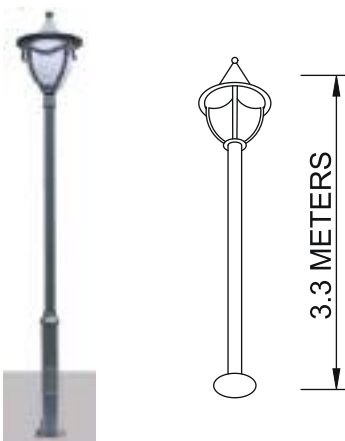

iLED 30 PL 16

MATERIAL	Aluminum Die Casting Graphite Black Finish with Milky Diffuser
MOUNTING	Surface Mount
I/P VOLTAGE	230VAC,50/60Hz
COLOR	W/WW/NW
RATED POWER	30W
LUMEN FLUX	3600-3000Lm
DIMENSION	3 Meters
APPLICATION	Pole Lights, Pathway Lights


Rs.31,250/-

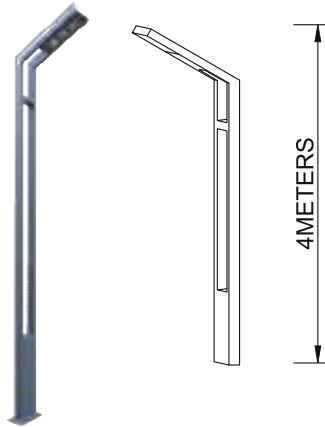

iLED 30 PL 17

MATERIAL	Aluminum Die Casting Graphite Black Finish with Milky Diffuser
MOUNTING	Surface Mount
I/P VOLTAGE	230VAC,50/60Hz
COLOR	W/WW/NW
RATED POWER	30W
LUMEN FLUX	3600-3000Lm
DIMENSION	3 Meters
APPLICATION	Pole Lights, Pathway Lights


Rs.29,000/-

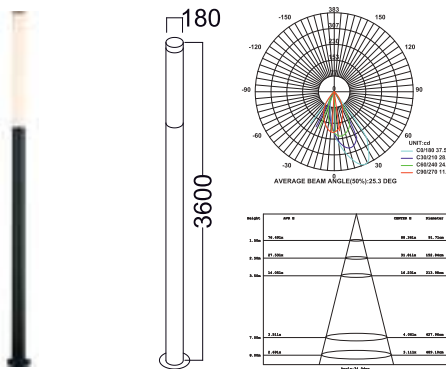

iLED 80 PL 18

MATERIAL	Aluminum Die Casting Graphite Black Finish with Milky Diffuser
MOUNTING	Surface Mount
I/P VOLTAGE	230VAC,50/60Hz
COLOR	W/WW/NW
RATED POWER	80W
LUMEN FLUX	9600-8000Lm
DIMENSION	D-160 X H-3600 mm
APPLICATION	Pole Lights, Pathway Lights




Rs.23,250/-

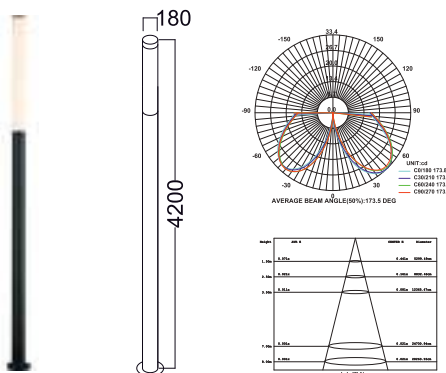

iLED 80 PL 19

MATERIAL	Aluminum Die Casting Graphite Black Finish with Milky Diffuser
MOUNTING	Surface Mount
I/P VOLTAGE	230VAC,50/60Hz
COLOR	W/WW/NW
RATED POWER	80W
LUMEN FLUX	9600-8000Lm
DIMENSION	D-160 X H-4200 mm
APPLICATION	Pole Lights, Pathway Lights




Rs.27,500/-



iLED - 5 GL 01

MATERIAL	Ventilated aluminum Die cast with Polished Reflector & Toughened Glass
MOUNTING	Surface Mount / Spike Mount
I/P VOLTAGE	230V AC, 50/60Hz, 12/24 V DC
RATED POWER	5W
LUMEN FLUX	600 - 600Lm
COLOR	W/WW/NW
DIMENSION	L- 85 X W-70 X H-90 mm
APPLICATION	Garden Spike lights




Rs.1,250/-



iLED - 8 GL 02

MATERIAL	Ventilated aluminum Die cast with Polished Reflector & Toughened Glass
MOUNTING	Surface Mount / Spike Mount
I/P VOLTAGE	230V AC, 50/60Hz, 12/24 V DC
RATED POWER	8W
LUMEN FLUX	960- 800Lm
COLOR	W/WW/NW
DIMENSION	L- 85 X W-95 X H-108 mm
APPLICATION	Garden Spike lights




Rs.1,450/-



iLED - 7 GL 03 LUXPRO®

MATERIAL	Ventilated aluminum with PMMA lens
MOUNTING	Surface Mount / Spike Mount
I/P VOLTAGE	230V AC, 50/60Hz, 12/24 V DC
RATED POWER	7W
LUMEN FLUX	840- 700Lm
COLOR	W/WW/NW
DIMENSION	D-50 X H-420mm
APPLICATION	Garden Spike lights

Rs.1,792/-



iLED - 10 GL 04

MATERIAL	Ventilated aluminum Die cast with Polished Reflector & Toughened Glass
MOUNTING	Surface Mount / Spike Mount
I/P VOLTAGE	230V AC, 50/60Hz, 12/24 V DC
RATED POWER	10W
LUMEN FLUX	1200- 1000Lm
COLOR	W/WW/NW
DIMENSION	D-70 X H-300mm
APPLICATION	Garden Spike lights


Rs.1,950/-



iLED - 15 GL 05 LUXPRO®

MATERIAL	Ventilated aluminum with PMMA lens
MOUNTING	Surface Mount
I/P VOLTAGE	230V AC, 50/60Hz, 12/24 V DC
RATED POWER	15W
LUMEN FLUX	1800- 1500Lm
COLOR	W/WW/NW
DIMENSION	D-105 X H-450mm
APPLICATION	Garden Spike lights


Rs.3,250/-

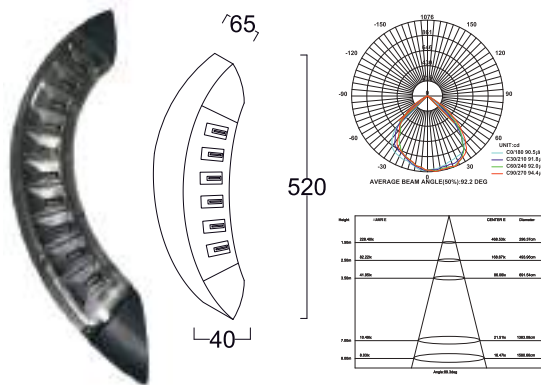

iLED 30/40 GL 06

MATERIAL	Ventilated Powder coated Die cast Aluminium with Reflector & Clear Diffuser
MOUNTING	Wall Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	30/40W
LUMEN FLUX	4800-3600Lm
COLOR	W/WW/NW
DIMENSION	L-520 X W-40 x H-65mm
APPLICATION	Garden & Gate lights


Rs.6,900/-

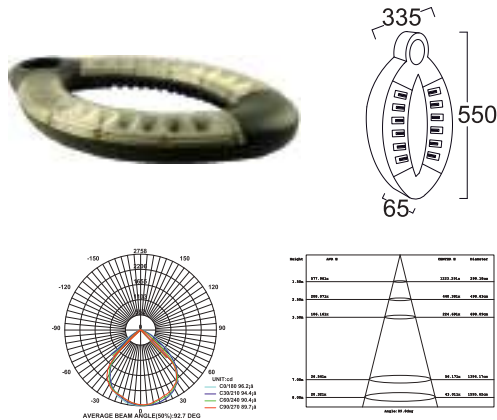

iLED 60/80 GL 07 - POST TOP LANTERN

MATERIAL	Ventilated Powder coated Die cast Aluminium with Reflector & Clear Diffuser
MOUNTING	Pole Mounting
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	60/80W
LUMEN FLUX	9600-8000Lm
COLOR	W/WW/NW
DIMENSION	L-550 X W-335 x H-65mm
APPLICATION	App : Garden & Gate lights


Rs.12,500/-

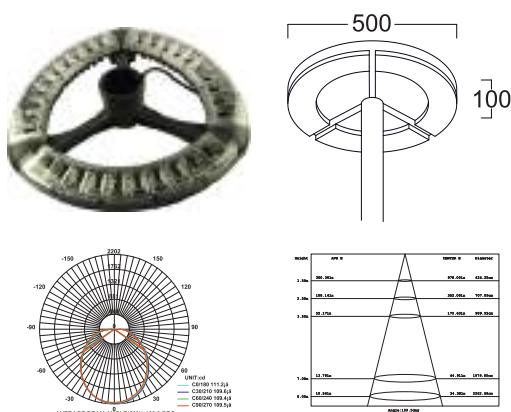

iLED 90/120 GL 08 - POST TOP LANTERN

MATERIAL	Ventilated Powder coated Die cast Aluminium with Reflector & Clear Diffuser
MOUNTING	Pole Mounting
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	90/120W
LUMEN FLUX	14400-12000Lm
COLOR	W/WW/NW
DIMENSION	D-500 X H-100mm
APPLICATION	Garden & Gate lights


Rs.17,000/-

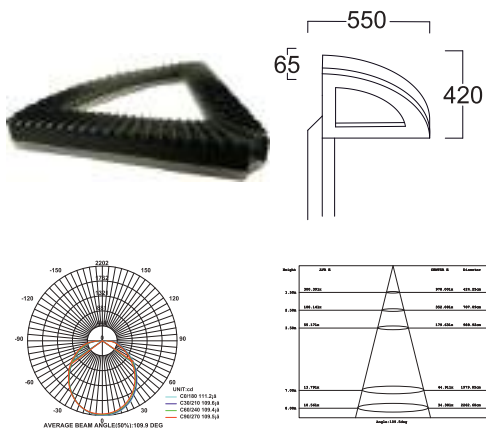

iLED 120 GL 09

MATERIAL	Ventilated Powder coated Die cast Aluminium & Milky Diffuser
MOUNTING	Pole Mounting
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	120W
LUMEN FLUX	14400-12000Lm
COLOR	W/WW/NW
DIMENSION	L-550 X W-420 x H-65mm
APPLICATION	Garden & Gate lights


Rs.17,000/-

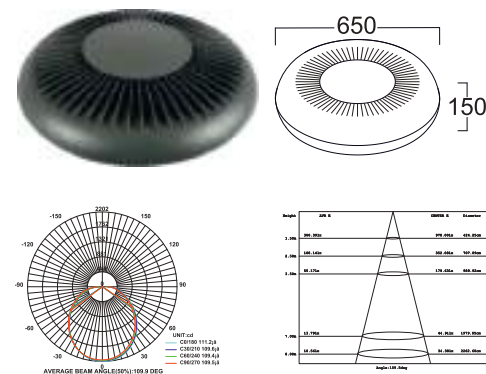

iLED 120/160 GL / ML 10 - POST TOP LANTERN

MATERIAL	Ventilated Powder coated Die cast Aluminium with Reflector & MILKY Diffuser
MOUNTING	Pole Mounting
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	120/160W
LUMEN FLUX	19200-16000Lm
COLOR	W/WW/NW
DIMENSION	D-650 X H-150mm
APPLICATION	Garden & Gate lights


Rs.19,250/-

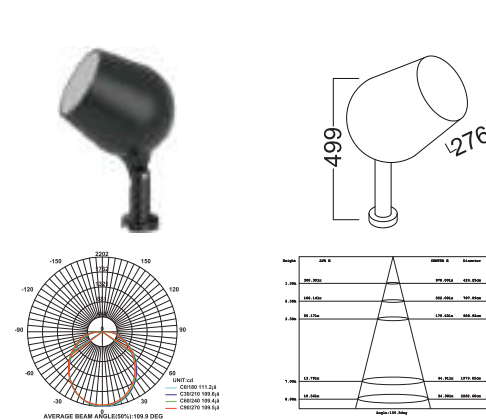

iLED 40 GL 11

MATERIAL	Ventilated Powder coated Die cast Aluminium & Milky Diffuser
MOUNTING	Pole Mounting
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	40W
LUMEN FLUX	4800-4000Lm
COLOR	W/WW/NW
DIMENSION	W-276 x H-499mm
APPLICATION	Garden & Gate lights


Rs. 29,500/-

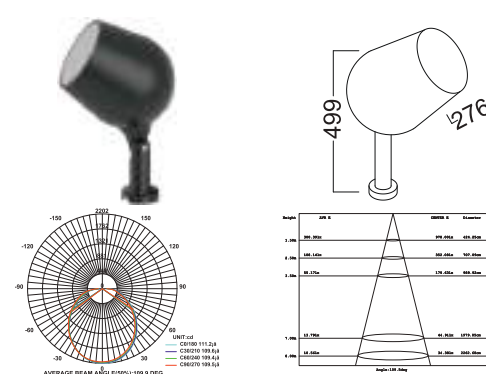

iLED 80 GL 12

MATERIAL	Ventilated Powder coated Die cast Aluminium & Milky Diffuser
MOUNTING	Pole Mounting
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	80W
LUMEN FLUX	9600-8000Lm
COLOR	W/WW/NW
DIMENSION	W-276 x H-499mm
APPLICATION	Garden & Gate lights


Rs.31,000/-

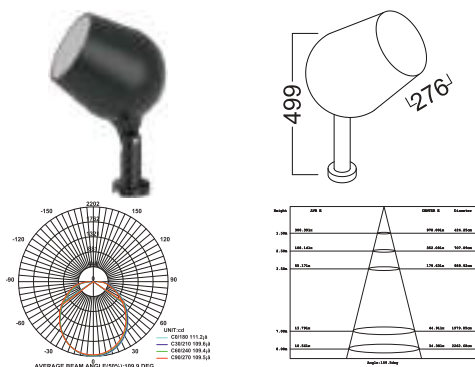

iLED 100 GL 13

MATERIAL	Ventilated Powder coated Die cast Aluminium & Milky Diffuser
MOUNTING	Pole Mounting
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	80W
LUMEN FLUX	12000-10000Lm
COLOR	W/WW/NW
DIMENSION	W-276 x H-499mm
APPLICATION	Garden & Gate lights

Rs.33,000/-

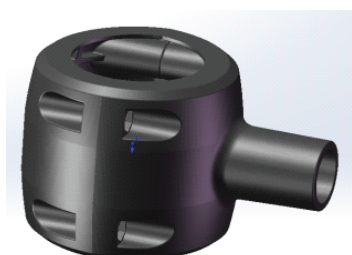



iLED CLAMP FOR GL 11/12/13

MATERIAL	Ventilated Powder coated Die cast Aluminium & Milky Diffuser
-----------------	--

Rs. 3,750/-



NEW




iLED GPL TD SF1001-01 LUXPRO®

MATERIAL	Gypsum / Plaster with front removable
MOUNTING	Recess Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	On Request
LUMEN FLUX	120-100Lm / Watt
COLOR	W/WW/ NW
DIMENSION	L-80 X W-80 X H-55mm
CUT OUT DIM	L-85 X W-85mm
CLIP MOVEMENT	12-24mm
APPLICATION	Hotel, Showroom, Home, Office, Auditorium, Theatres Etc

Rs.700/-

NEW




iLED GPL TD S2F1001-02 LUXPRO®

MATERIAL	Gypsum / Plaster with front removable
MOUNTING	Recess Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	On Request
LUMEN FLUX	120-100Lm / Watt
COLOR	W/WW/ NW
DIMENSION	L-150 X W-80 X H-55mm
CUT OUT DIM	L-155 X W-85mm
CLIP MOVEMENT	12-24mm
APPLICATION	Hotel, Showroom, Home, Office, Auditorium, Theatres Etc

Rs.1,050/-

NEW




iLED GPL TD S3F1001-03 LUXPRO®

MATERIAL	Gypsum / Plaster with front removable
MOUNTING	Recess Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	On Request
LUMEN FLUX	120-100Lm / Watt
COLOR	W/WW/ NW
DIMENSION	L-200 X W-80 X H-55mm
CUT OUT DIM	L-205 X W-85mm
CLIP MOVEMENT	12-24mm
APPLICATION	Hotel, Showroom, Home, Office, Auditorium, Theatres Etc

Rs.1,400/-

NEW

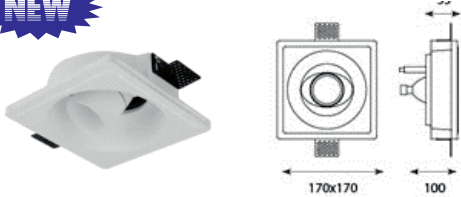


iLED GPL TH SY2002-04 LUXPRO®

MATERIAL	Gypsum / Plaster with front removable & Adjustable
MOUNTING	Recess Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	On Request
LUMEN FLUX	120-100Lm / Watt
COLOR	W/WW/ NW
DIMENSION	L-170 X W-170 X H-55mm
CUT OUT DIM	L-175 X W-175mm
CLIP MOVEMENT	12-24mm
APPLICATION	Hotel, Showroom, Home, Office, Auditorium, Theatres Etc

Rs.2,700/-

NEW

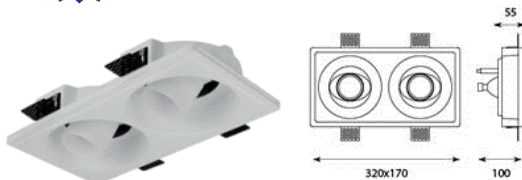


iLED GPL TH S2Y2002-05 LUXPRO®

MATERIAL	Gypsum / Plaster with front removable & Adjustable
MOUNTING	Recess Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	On Request
LUMEN FLUX	120-100Lm / Watt
COLOR	W/WW/ NW
DIMENSION	L-320 X W-170 X H-55mm
CUT OUT DIM	L-325 X W-175mm
CLIP MOVEMENT	12-24mm
APPLICATION	Hotel, Showroom, Home, Office, Auditorium, Theatres Etc

Rs.4,350/-

NEW

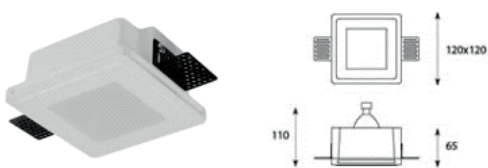


iLED GPL TD SF1004-06 LUXPRO®

MATERIAL	Gypsum / Plaster with milky diffuser & front removable
MOUNTING	Recess Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	On Request
LUMEN FLUX	120-100Lm / Watt
COLOR	W/WW/ NW
DIMENSION	L-120 X W-120 X H-65mm
CUT OUT DIM	L-125 X W-125mm
CLIP MOVEMENT	12-24mm
APPLICATION	Hotel, Showroom, Home, Office, Auditorium, Theatres Etc

Rs.800/-

NEW

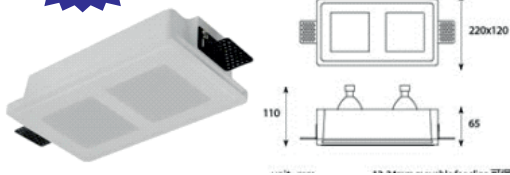


iLED GPL TD S2F1004-07 LUXPRO®

MATERIAL	Gypsum / Plaster with milky diffuser & front removable
MOUNTING	Recess Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	On Request
LUMEN FLUX	120-100Lm / Watt
COLOR	W/WW/ NW
DIMENSION	L-220 X W-120 X H-65mm
CUT OUT DIM	L-225 X W-125mm
CLIP MOVEMENT	12-24mm
APPLICATION	Hotel, Showroom, Home, Office, Auditorium, Theatres Etc

Rs.1,350/-

NEW

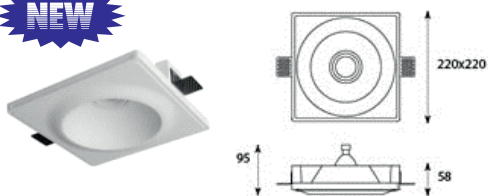


iLED GPL TH SY3001-08 LUXPRO®

MATERIAL	Gypsum / Plaster with front removable
MOUNTING	Recess Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	On Request
LUMEN FLUX	120-100Lm / Watt
COLOR	W/WW/ NW
DIMENSION	L-220 X W-220 X H-58mm
CUT OUT DIM	L-225 X W-225mm
CLIP MOVEMENT	12-24mm
APPLICATION	Hotel, Showroom, Home, Office, Auditorium, Theatres Etc

Rs.2,300/-

NEW

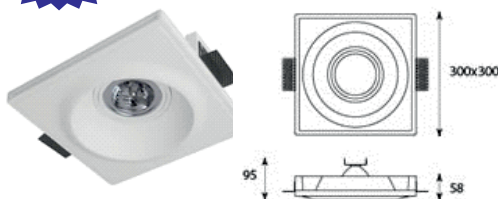

iLED GPL TH SY3002-09 LUXPRO®


MATERIAL	Gypsum / Plaster with front removable
MOUNTING	Recess Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	On Request
LUMEN FLUX	120-100Lm / Watt
COLOR	W/WW/ NW
DIMENSION	L-300 X W-300 X H-50mm
CUT OUT DIM	L-305 X W-305mm
CLIP MOVEMENT	12-24mm
APPLICATION	Hotel, Showroom, Home, Office, Auditorium, Theatres Etc

Rs.3,850/-

GYPSUM LIGHTS - TRIMLESS

iLED®

NEW

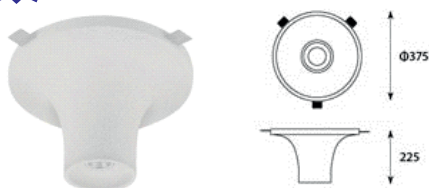

iLED GPL TH SR3010-10 LUXPRO®

MATERIAL	Gypsum / Plaster with front removable
MOUNTING	Recess Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	On Request
LUMEN FLUX	120-100Lm / Watt
COLOR	W/WW/ NW
DIMENSION	D-375 X H-225mm
CUT OUT DIM	D-380mm
CLIP MOVEMENT	Hotel, Showroom, Home, Office,
APPLICATION	Auditorium, Theatres Etc

Rs.5,500/-

NEW





iLED GPL TH SR3012-11 LUXPRO®

MATERIAL	Gypsum / Plaster with front removable
MOUNTING	Recess Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	On Request
LUMEN FLUX	120-100Lm / Watt
COLOR	W/WW/ NW
DIMENSION	D-230 X H-150mm
CUT OUT DIM	D-235mm
CLIP MOVEMENT	Hotel, Showroom, Home, Office,
APPLICATION	Auditorium, Theatres Etc

Rs.3,500/-

NEW

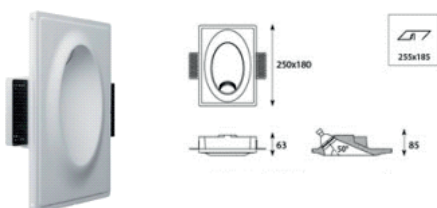



iLED GPL XQ SR3001-12 LUXPRO®

MATERIAL	Gypsum / Plaster with front removable
MOUNTING	Recess Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	On Request
LUMEN FLUX	120-100Lm / Watt
COLOR	W/WW/ NW
DIMENSION	L-250 X W-180 X H-60mm
CUT OUT DIM	L-255 X W-185mm
CLIP MOVEMENT	12-24mm
APPLICATION	Hotel, Showroom, Home, Office, Auditorium, Theatres Etc

Rs.1,800/-

GYPSUM LIGHTS - TRIMLESS

NEW


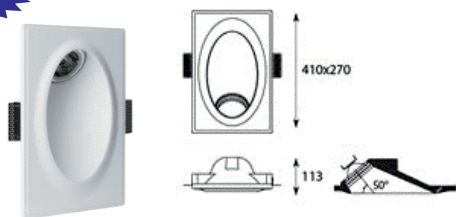


iLED GPL XQ SR4001-13 LUXPRO®

MATERIAL	Gypsum / Plaster with front removable
MOUNTING	Recess Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	On Request
LUMEN FLUX	120-100Lm / Watt
COLOR	W/WW/ NW
DIMENSION	L-410 X W-270 X H-123mm
CUT OUT DIM	L-415 X W-275mm
CLIP MOVEMENT	12-24mm
APPLICATION	Hotel, Showroom, Home, Office, Auditorium, Theatres Etc

Rs.3,500/-

NEW

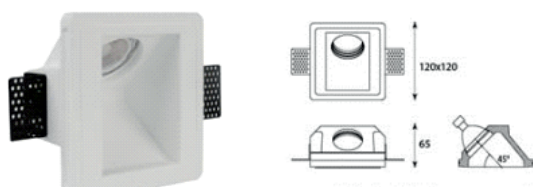


iLED GPL XQ SF1001-14 LUXPRO®

MATERIAL	Gypsum / Plaster with front removable
MOUNTING	Recess Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	On Request
LUMEN FLUX	120-100Lm / Watt
COLOR	W/WW/ NW
DIMENSION	L-120 X W-120 X H-65mm
CUT OUT DIM	L-125 X W-125mm
CLIP MOVEMENT	12-24mm
APPLICATION	Hotel, Showroom, Home, Office, Auditorium, Theatres Etc

Rs.900/-

NEW

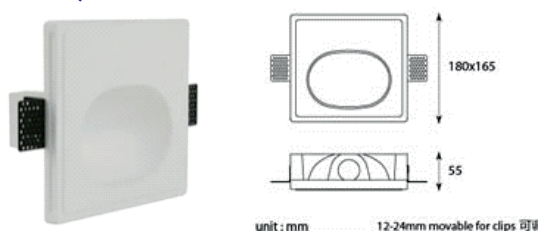


iLED GPL QJ SR2001-15 LUXPRO®

MATERIAL	Gypsum / Plaster with front removable
MOUNTING	Recess Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	On Request
LUMEN FLUX	120-100Lm / Watt
COLOR	W/WW/ NW
DIMENSION	L-180 X W-120 X H-55mm
CUT OUT DIM	L-185 X W-125mm
CLIP MOVEMENT	12-24mm
APPLICATION	Hotel, Showroom, Home, Office, Auditorium, Theatres Etc

Rs.2,200/-

NEW




iLED GPL QJ SR2002-16 LUXPRO®

MATERIAL	Gypsum / Plaster with front removable
MOUNTING	Recess Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	On Request
LUMEN FLUX	120-100Lm / Watt
COLOR	W/WW/ NW
DIMENSION	L-250 X W-210 X H-80mm
CUT OUT DIM	L-255 X W-215mm
CLIP MOVEMENT	12-24mm
APPLICATION	Hotel, Showroom, Home, Office, Auditorium, Theatres Etc

Rs.1,900/-

NEW





iLED GPL QJ SR2003-17 LUXPRO®

MATERIAL	Gypsum / Plaster with front removable
MOUNTING	Recess Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	On Request
LUMEN FLUX	120-100Lm / Watt
COLOR	W/WW/ NW
DIMENSION	L-350 X W-290 X H-180mm
CUT OUT DIM	L-355 X W-295mm
CLIP MOVEMENT	12-24mm
APPLICATION	Hotel, Showroom, Home, Office, Auditorium, Theatres Etc

Rs.3,000/-




NEW



iLED GPL QJ SY2001-18 LUXPRO®

MATERIAL	Gypsum / Plaster
MOUNTING	Recess Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	1 / 3W
LUMEN FLUX	120-100Lm / Watt
COLOR	W/WW/ NW
DIMENSION	L-190 X W-190 X H-42mm
CUT OUT DIM	L-195 X W-195mm
CLIP MOVEMENT	12-24mm
APPLICATION	Hotel, Showroom, Home, Office, Auditorium, Theatres Etc




Rs.1,650/-



iLED 30 FL Black Eye 001

MATERIAL	Ventilated Aluminium with Reflective hood and Tempered Glass
MOUNTING	Suspended / Angular Mounting
I/P VOLTAGE	85-265V AC, 50/60 Hz
POWER	30W
LUMEN FLUX	3600-3000 Lm
DIMENSION	D-190XH-220 mm
COLOR	W/WW/NW
APPLICATION	Factory, WareHouse, Yard, Super Market, Conventional Centre Etc.




Rs.6,000/-



iLED 80 HB 002

MATERIAL	Extrusion Aluminium with Reflective hood and Milky Diffuser
MOUNTING	Suspended / Angular Mounting
I/P VOLTAGE	85-265V AC, 50/60 Hz
POWER	80W
LUMEN FLUX	9600-8000 Lm
DIMENSION	D-400XH-220 mm
COLOR	W/WW/NW
APPLICATION	Factory, WareHouse, Yard, Super Market, Conventional Centre Etc.




Rs.7,254/-



iLED 120/150 HB 003

MATERIAL	Extrusion Aluminium with Reflective hood and Milky Diffuser
MOUNTING	Suspended / Angular Mounting
I/P VOLTAGE	85-265V AC, 50/60 Hz
POWER	120/150W
LUMEN FLUX	14400-12000 Lm
DIMENSION	D-450XH-250 mm
COLOR	W/WW/NW
APPLICATION	Factory, WareHouse, Yard, Super Market, Conventional Centre Etc.

Rs.12,264/-






iLED 180/200 HB 004

MATERIAL	Extrusion Aluminium with Reflective hood and Milky Diffuser
MOUNTING	Suspended / Angular Mounting
I/P VOLTAGE	85-265V AC, 50/60 Hz
POWER	180/200W
LUMEN FLUX	21600-18000 Lm
DIMENSION	D-330 X H-220 mm
COLOR	W/WW/NW
APPLICATION	Factory, WareHouse, Yard, Super Market, Conventional Centre Etc.

Rs.15,626/-

NEW






iLED 50 DS 21G 01

MATERIAL	Extrusion Aluminium with Reflective hood and Milky Diffuser
MOUNTING	Suspended / Angular Mounting
I/P VOLTAGE	85-265V AC, 50/60 Hz
POWER	50W
LUMEN FLUX	6000-5000 Lm
DIMENSION	D-310 X H-250mm
COLOR	W/WW/NW
APPLICATION	Factory, WareHouse, Yard, Super Market, Etc.

Rs.6,000/-

NEW






iLED 50 DS 32R 02

MATERIAL	Extrusion Aluminium with Reflective hood and Milky Diffuser
MOUNTING	Suspended / Angular Mounting
I/P VOLTAGE	85-265V AC, 50/60 Hz
POWER	50W
LUMEN FLUX	6000-5000 Lm
DIMENSION	D-310 X H-250mm
COLOR	W/WW/NW
APPLICATION	Factory, WareHouse, Yard, Super Market, Etc.

Rs.6,000/-

NEW





iLED 50 DS 41Y 03

MATERIAL	Extrusion Aluminium with Reflective hood and Milky Diffuser
MOUNTING	Suspended / Angular Mounting
I/P VOLTAGE	85-265V AC, 50/60 Hz
POWER	50W
LUMEN FLUX	6000-5000 Lm
DIMENSION	D-310 X H-250mm
COLOR	W/WW/NW
APPLICATION	Factory, WareHouse, Yard, Super Market, Etc.


Rs.6,000/-

iLED 36/40 TL T8 04 - TRI PROOF



MATERIAL	Aluminium Housing With PCB with polycarbonate Milky cover
MOUNTING	Batten Type
I/P VOLTAGE	85-265V AC, 50/60Hz
RATED POWER	36/40W
LUMEN FLUX	4800-4000 Lm
COLOR	W / WW / NW
DIMENSION	4 feet
DIMENSION BOX	L-2700 X W-50 X H-60 mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium


Rs.2,750/-

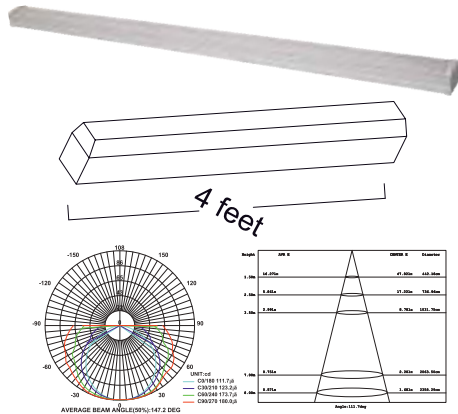

iLED 40 TL T8 05 - TRI PROOF

MATERIAL	Aluminium Housing With PCB with polycarbonate Milky cover
MOUNTING	Batten Type
I/P VOLTAGE	230V AC, 50/60Hz
RATED POWER	40W
LUMEN FLUX	4800 - 4000 Lm
COLOR	W / WW / NW
DIMENSION	4 feet
DIMENSION BOX	L-1230 X W-40 X H-35 mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium

Rs.2,750/-

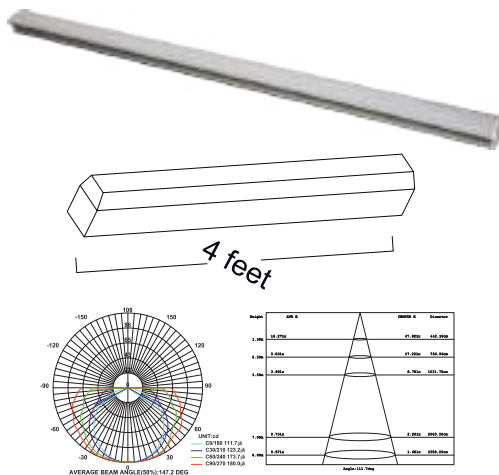


iLED 40 TL T8 06 - TRI PROOF

MATERIAL	Aluminium Housing With PCB with polycarbonate Milky cover
MOUNTING	Batten Type
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	40W
LUMEN FLUX	4800-4000 Lm
COLOR	W / WW / NW
DIMENSION	4 feet
DIMENSION BOX	L-2450 X W-40 X H-35 mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium

Rs.2,750/-


SPORTS LIGHTS / HI BAY LIGHTS ADJUSTABLE

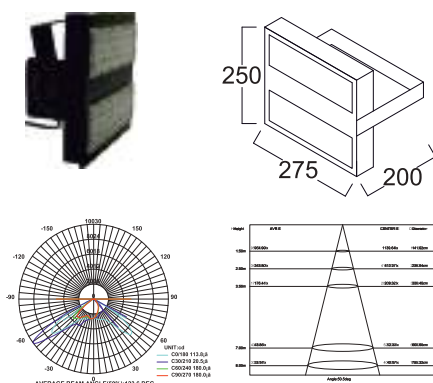

iLED 80 HB/FL 01

MATERIAL	Extruded Aluminium with Wide beam PMMA Lens
MOUNTING	Suspended / Angular Mounting
I/P VOLTAGE	200-265V AC, 50/60 Hz
POWER	70/80W
LUMEN FLUX	8400-7000 Lm
DIMENSION	L-250 X W-275 X H-200 mm
COLOR	W/WW/NW
APPLICATION	Factory, WareHouse, Yard, Super Market, Conventional Centre Etc.
ANGLE	80°/145°


Rs.12,225/-

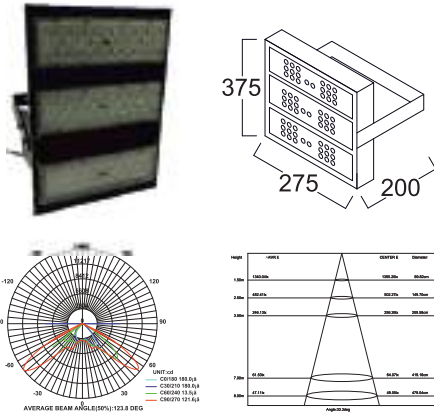

iLED 120 HB/FL 02

MATERIAL	Ventilated Aluminium Die Cast with Wide beam PMMA Lens
MOUNTING	Suspended / Angular Mounting
I/P VOLTAGE	200-265V AC, 50/60 Hz
POWER	115/120W
LUMEN FLUX	13800-11500 Lm
DIMENSION	L-375 X W-275 X H-200 mm
COLOR	W/WW/NW
APPLICATION	Factory, WareHouse, Yard, Super Market, Conventional Centre Etc.
ANGLE	80°/145°


Rs.15,750/-

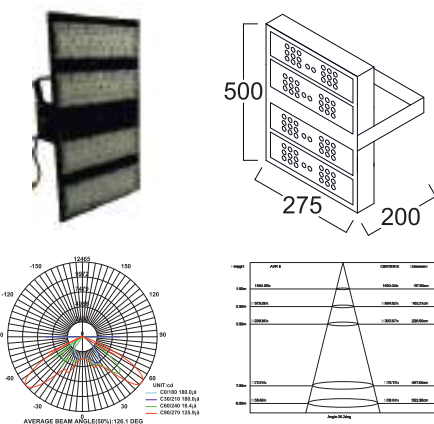

iLED 160 HB/FL 03

MATERIAL	Ventilated Aluminium Die Cast with Wide beam PMMA Lens
MOUNTING	Suspended / Angular Mounting
I/P VOLTAGE	200-265V AC, 50/60 Hz
POWER	160W
LUMEN FLUX	19200-16000 Lm
DIMENSION	L-500 X W-275 X H-200 mm
COLOR	W/WW/NW
APPLICATION	Factory, WareHouse, Yard, Super Market, Conventional Centre Etc.
ANGLE	80°/145°

Rs.20,250/-

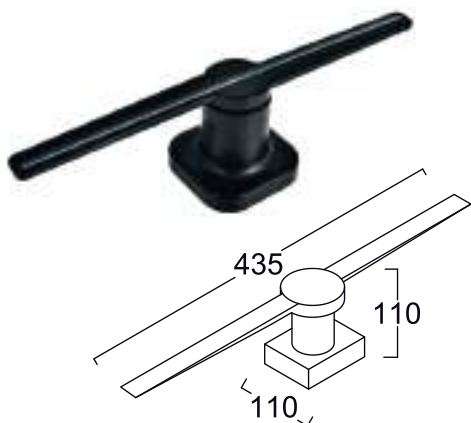

iLED 3D HOLOGRAPHIC FAN

MATERIAL	ABS plastic with rotatable motor Programmable
MOUNTING	Surface Mount using Mounting Lamp
I/P VOLTAGE	12V DC
POWER SUPPLY	12V DC with Adapter
COLOR	RGB
DIMENSION	L-435 X W-110 X H-110 mm
APPLICATION	Hologram Advertising

Rs.26,000/-




iLED GOBO LIGHT

MATERIAL	ABS plastic with rotatable motor Programmable
MOUNTING	Surface Mount using Mounting Lamp
I/P VOLTAGE	12V DC
POWER SUPPLY	12V DC with Adapter
COLOR	RGB
DIMENSION	L-188 X W-83 X H-200 mm
APPLICATION	Hologram Advertising

Rs.22,500/-




iLED IA03-01

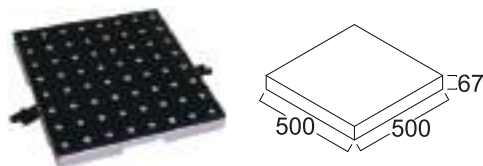

MATERIAL	Aluminum Alloy with Tempered Glass
MOUNTING	Floor Mounting
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	5-25W
COLOR	W/WW/RGB
DIMENSION	L-500 X W- 500 X H- 67 mm
APPLICATION	Floor Mount for interaction with graphics and text

Price on request


iLED IA06-02

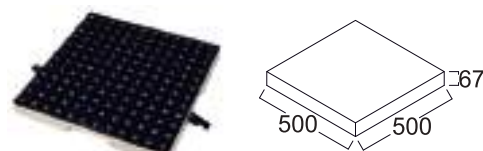

MATERIAL	Aluminum Alloy with Tempered Glass
MOUNTING	Floor Mounting
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	15W
COLOR	W/WW/RGB
DIMENSION	L-500 X W- 500 X H- 67 mm
APPLICATION	Floor Mount for interaction with graphics and text

Price on request


iLED IA04-03

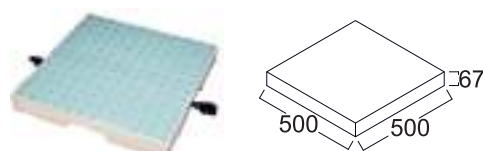

MATERIAL	Aluminum Alloy with Tempered Glass
MOUNTING	Table Top Mounting
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	5-25W
COLOR	W/WW/RGB
DIMENSION	L-500 X W- 500 X H- 67 mm
APPLICATION	Floor Mount for interaction with graphics and text




Price on request

iLED PIANO TILES 04



MATERIAL	12mm Tempered Frost Glass+1.0mm Stainless steel housing
IP RATING	IP 65
INPUT VOLTAGE	AC24V
INPUT POWER	41W
LED SOURCE	230PCS*SMD5050 Epistar
LUMINOUS FLUX	70LM/W
BEAM ANGLE	120°
CONTROL MODE	SPI
COLOR	RGB
DIMENSION	L-1000 X W-300 X H-65 mm
APPLICATION	Floor Mount for interaction with graphics and text




Price on request



iLED 1 IWL CED 01

MATERIAL	Abs plastic
MOUNTING	Inwall / 2 Way Switch Box
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	1W
LUMEN FLUX	120- 100Lm
COLOR	W/WW/NW
DIMENSION	L-94 X W-94 X H-32mm
APPLICATION	Bed rooms, passages, corridors, etc.




Rs.625/-



iLED 3 IWL CED 02

MATERIAL	Aluminium Die Cast with Powder coated
MOUNTING	Inwall
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	3W
LUMEN FLUX	360- 300Lm
COLOR	W/WW/NW
DIMENSION	L-50 X W-50 X H-30mm
APPLICATION	Bed rooms, passages, corridors, etc.




Rs.650/-



iLED 1 / 3 IWL CED 03

MATERIAL	Aluminium Die Cast with Powder coated
MOUNTING	Inwall
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	3W
LUMEN FLUX	360- 300Lm
COLOR	W/WW/NW
DIMENSION	D-45 X H-30mm
APPLICATION	Bed rooms, passages, corridors, etc.




Rs.650/-



iLED 1 / 3 IWL CED 04

MATERIAL	Aluminium Die Cast with Powder coated
MOUNTING	Inwall
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	3W
LUMEN FLUX	360- 300 Lm
COLOR	W/WW/NW
DIMENSION	L-45 X W-45 X H-30mm
APPLICATION	Bed rooms, passages, corridors, etc.

Rs.650/-




iLED 3 / 5 IWL CED 05

MATERIAL	Aluminium Die Cast with Powder coated
MOUNTING	Inwall / 2 Way Switch Box
I/P VOLTAGE	230VAC,50/60Hz
RATED POWER	3 / 5W
LUMEN FLUX	600- 500Lm
COLOR	W/WW/NW
DIMENSION	L-80 X W-80 X H-47mm
APPLICATION	Bed rooms, passages, corridors, etc.

Rs.950/-


iLED 5 IWL 01 - IP65

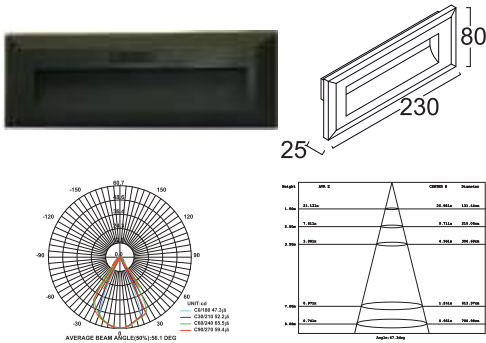

MATERIAL	Aluminum Die Cast with Powder coated
MOUNTING	Surface mount
I/P VOLTAGE	230VAC,50/60Hz
RATED POWER	5W
LUMEN FLUX	600- 500Lm
COLOR	W/WW/NW
DIMENSION	L -230 X W-80 X H-25mm
APPLICATION	Outdoor, passages, corridors, etc.

Rs.2200/-


iLED 5 IWL 02 - IP65

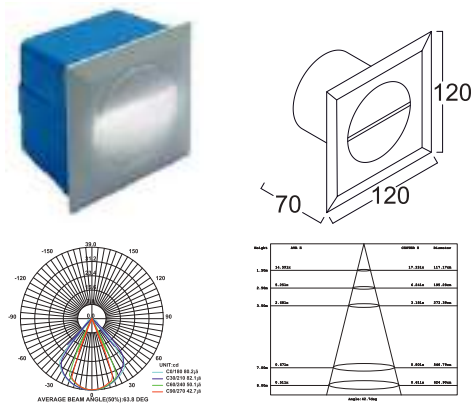

MATERIAL	Aluminium Die Cast with Powder coated
MOUNTING	Inwall
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	5W
LUMEN FLUX	600- 500Lm
COLOR	W/WW/NW
DIMENSION	L-120 X W-120 X H-70mm
APPLICATION	Outdoor, passages, corridors, etc.

Rs.2000/-


iLED 5 IWL CED 03 - IP65

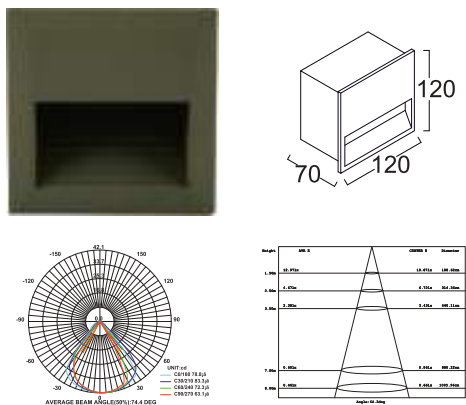

MATERIAL	Aluminium Die Cast with Powder coated
MOUNTING	Inwall
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	5W
LUMEN FLUX	600- 500Lm
COLOR	W/WW/NW
DIMENSION	L -120 X W-120 X H-70mm
APPLICATION	Outdoor, passages, corridors, etc.




Rs.2000/-

iLED 5 IWL CED 04 - IP65

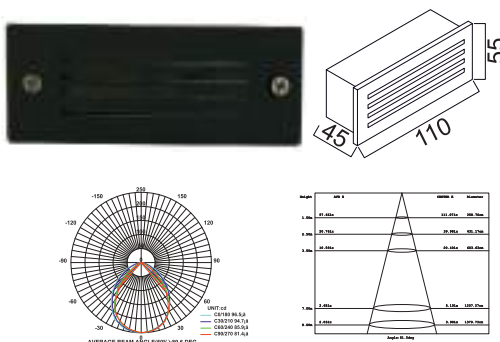

MATERIAL	Aluminium Die Cast with Powder coated
MOUNTING	Inwall
I/P VOLTAGE	230VAC,50/60Hz
RATED POWER	5W
LUMEN FLUX	600- 500Lm
COLOR	W/WW/NW
DIMENSION	L -110 X W-45 X H-55mm
APPLICATION	Outdoor Car Parking, passages, corridors, etc.




Rs.1,450/-



iLED 6 IWL 05 - IP65

MATERIAL	Aluminium Die Cast with Powder coated
MOUNTING	Inwall
I/P VOLTAGE	230VAC,50/60Hz
RATED POWER	6 W
LUMEN FLUX	720-600Lm
COLOR	W/WW/NW
DIMENSION	L-115 X W-85 X H-52mm
APPLICATION	Outdoor Car Parking, Passages, Corridors, etc.




Rs.1,750/-



iLED 15 IWL 06 - IP65

MATERIAL	Aluminium Die Cast with Powder coated
MOUNTING	Inwall
I/P VOLTAGE	230VAC,50/60Hz
RATED POWER	15 W
LUMEN FLUX	1800-1500 Lm
COLOR	W/WW/NW
DIMENSION	L -230 X W-128 X H-90mm
APPLICATION	Outdoor Car Parking, Passages, Corridors, etc.,




Rs.3,500/-



iLED 35 IWL 07 - IP65

MATERIAL	Aluminium Die Cast with Powder coated
MOUNTING	Inwall
I/P VOLTAGE	230VAC,50/60Hz
RATED POWER	35 W
LUMEN FLUX	4200-3500 Lm
COLOR	W/WW/NW
DIMENSION	L -260 X W-245 X H-60mm
APPLICATION	Outdoor Car Parking, Passages, Corridors, etc.,



Rs.12,500/-



iLED 35 IWL 08 - IP65

MATERIAL	Aluminium Die Cast with Powder coated
MOUNTING	Surface Mount
I/P VOLTAGE	230VAC,50/60Hz
RATED POWER	35 W
LUMEN FLUX	4200-3500 Lm
COLOR	W/WW/NW
DIMENSION	L -200 X W-200 X H-30mm
APPLICATION	Outdoor Car Parking, Passages, Corridors, etc.,

Rs.12,500/-

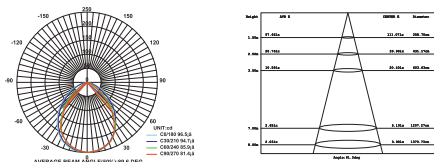
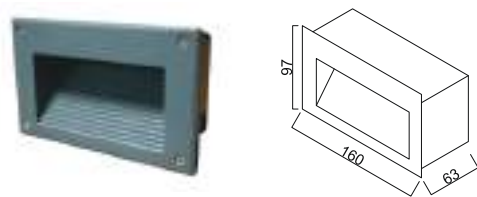


iLED 9 IWL 09 - IP65

MATERIAL	Aluminium Die Cast with Powder coated
MOUNTING	Inwall
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	9 W
LUMEN FLUX	1080-900 Lm
COLOR	W/WW/NW
DIMENSION	L - 160 X W-97 X H-63mm
APPLICATION	Outdoor Car Parking, Passages, Corridors, etc.,

Rs.3,500/-



JEWELLERY & SHOWCASE DISPLAY LIGHTING

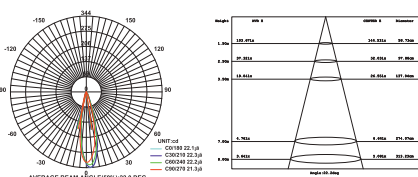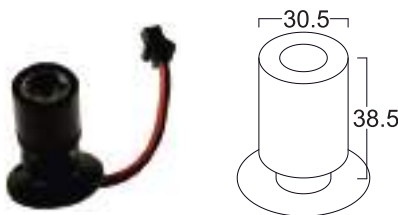

iLED 1 JL 01

MATERIAL	Aluminum with adjustable head & PMMA Optics
MOUNTING	Surface Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	1W
LUMEN FLUX	120- 100Lm
COLOR	W/WW/NW
DIMENSION	D-30.5 X H-38.5 mm
DIMENSION BOX	40X40X60 mm
APPLICATION	Decoration of the house, Showcase, Rooms, Reading etc.



Rs.426/-

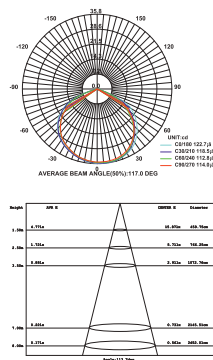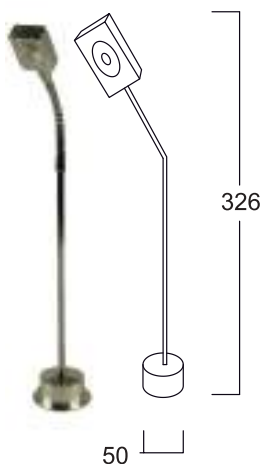

iLED 1 SJL SQ 02

MATERIAL	Aluminum with flexible gooseneck / Adjustable head & PMMA Optics
MOUNTING	Surface Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	1W
LUMEN FLUX	120- 100Lm
COLOR	W/WW/NW
DIMENSION	D-50 X H-326 mm
DIMENSION BOX	330X65X50 mm
APPLICATION	Decoration of the house, Showcase, Rooms, Reading etc.


Rs.426/-

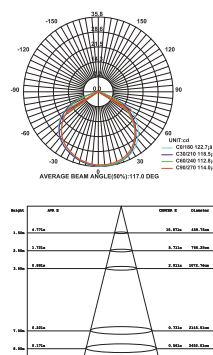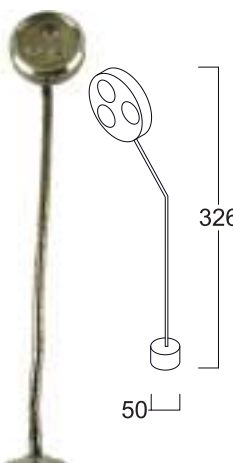

iLED 3 RJL 03

MATERIAL	Aluminum with flexible gooseneck / Adjustable head & PMMA Optics
MOUNTING	Surface Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	3W
LUMEN FLUX	360- 300Lm
COLOR	W/WW/NW
DIMENSION	D-50 X H-326 mm
DIMENSION BOX	330X65X50 mm
APPLICATION	Decoration of the house, Showcase, Rooms, Reading etc.



Rs.750/-

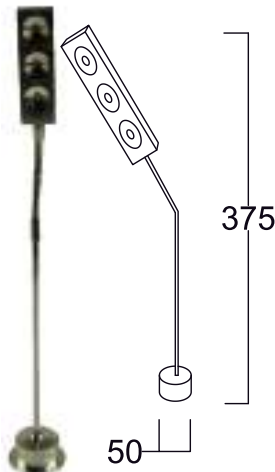

iLED 3 SJL 04

MATERIAL	Aluminum with flexible gooseneck / Adjustable head & PMMA Optics
MOUNTING	Surface Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	3W
LUMEN FLUX	360 - 300Lm
COLOR	W/WW/NW
DIMENSION	D-50 X H-375 mm
DIMENSION BOX	380X65X50 mm
APPLICATION	Decoration of the house, Showcase, Rooms, Reading etc.



Rs.750/-

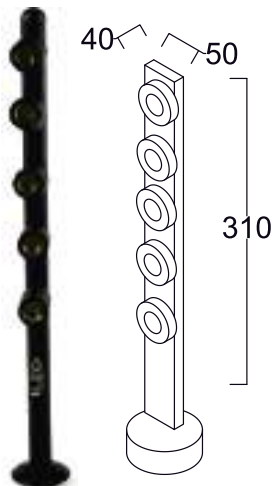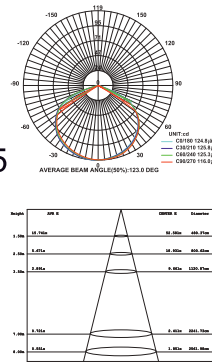

iLED 5 JL 05

MATERIAL	Aluminum with Adjustable head & PMMA Optics
MOUNTING	Surface Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	5W
LUMEN FLUX	600- 500Lm
COLOR	W/WW/NW
DIMENSION	D-40 X W 50 X H-310 mm
APPLICATION	Decoration of the house, Showcase, Rooms, Reading etc.


Rs.1,550/-

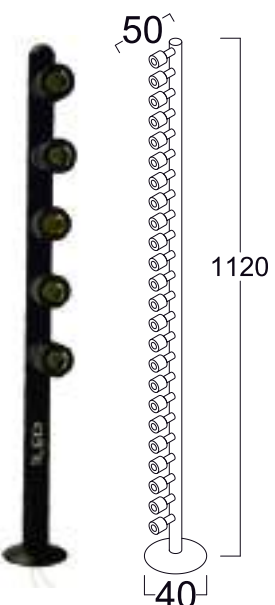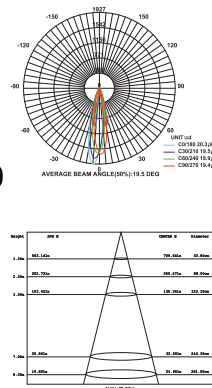




iLED 24 JL 06

MATERIAL	Aluminum with Adjustable head & PMMA Optics
MOUNTING	Surface Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	24W
LUMEN FLUX	2880- 2400Lm
COLOR	W/WW/NW
DIMENSION	D-40 X W 50 X H-1120 mm
APPLICATION	Decoration of the house, Showcase, Rooms, Reading etc.

Rs.750/-

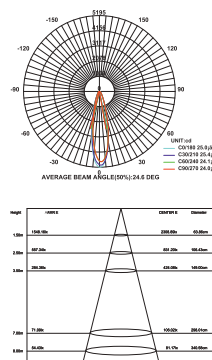

NEW






iLED 8 ML 01

MATERIAL	Ventilated Aluminum with Glass
MOUNTING	Surface Mount
I/P VOLTAGE	230VAC,50/60Hz
RATED POWER	8W
LUMEN FLUX	960-800 Lm
COLOR	W/WW/NW
DIMENSION	L-350 X W-83 X H-30 mm
APPLICATION	Above the mirror / Picture

Rs.950/-

NEW






iLED 12 ML 02

MATERIAL	Ventilated Aluminum with Glass
MOUNTING	Surface Mount
I/P VOLTAGE	230VAC,50/60Hz
RATED POWER	12W
LUMEN FLUX	1440-1200 Lm
COLOR	W/WW/NW
DIMENSION	L-485 X W-85 X H-30 mm
APPLICATION	Above the mirror / Picture

Rs.1,250/-

NEW






iLED 8 ML 03

MATERIAL	Stainless Steel with Milky Diffuser
MOUNTING	Surface Mount
I/P VOLTAGE	230VAC,50/60Hz
RATED POWER	8W
LUMEN FLUX	960-800 Lm
COLOR	W/WW/NW
DIMENSION	L-470 X W-95 X H-48mm
APPLICATION	Above the mirror / Picture

Rs.1,475/-

NEW




iLED 8 ML 04

MATERIAL	Ventilated Aluminum with milkyDiffuser
MOUNTING	Surface Mount
I/P VOLTAGE	230VAC,50/60Hz
RATED POWER	8W
LUMEN FLUX	960-800 Lm
COLOR	W/WW/NW
DIMENSION	L-650 X W-75 X H-30 mm
APPLICATION	Above the mirror / Picture

Rs.1,425/-

MIRROR / PICTURE LIGHTS

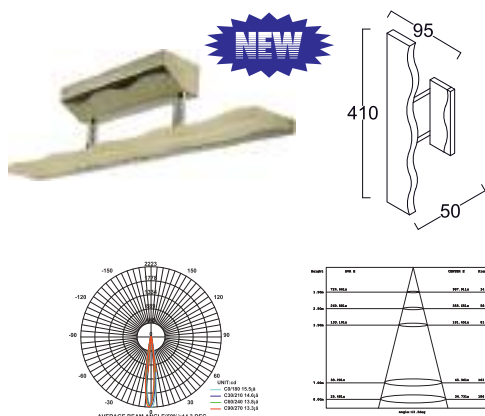

iLED 8 ML 05

MATERIAL	Stainless Steel with wave shaped Acrylic
MOUNTING	Surface Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	8W
LUMEN FLUX	960-800 Lm
COLOR	W/WW/NW
DIMENSION	L-410 X W-95 X H-50mm
APPLICATION	Above the mirrors

Rs.1,550/-

NEON STRIP LIGHT



iLED 12 NL 01

MATERIAL	PVC
IP RATING	IP 65/67
I/P VOLTAGE	12V, 24V
RATED POWER	12W
LUMEN FLUX	1440-1200 Lm
COLOR	R/G/B/Y/P/W/WW/ICE Blue
DIMENSION	7 X 12 mm
APPLICATION	Outdoor, Name Board, Decorative Lights

Rs.275/-



iLED 12 NL 02

MATERIAL	SILICA
IP RATING	IP 65/67
I/P VOLTAGE	12V, 24V
RATED POWER	12W
LUMEN FLUX	1440-1200 Lm
COLOR	R/G/B/Y/P/W/WW/ICE Blue
DIMENSION	7 X 12 mm
APPLICATION	Outdoor, Name Board, Decorative Lights

Rs.325/-




iLED 12 NL 03

MATERIAL	PVC
IP RATING	IP 65/67
I/P VOLTAGE	12V
RATED POWER	12W
LUMEN FLUX	1440-1200 Lm
COLOR	R/G/B/Y/P/W/WW/ICE Blue
DIMENSION	8 X 8 mm
APPLICATION	Outdoor, Name Board, Decorative Lights

Rs.245/-

NEW



iLED 7 NL O4 & iLED 12 NL O5

MATERIAL	PVC
IP RATING	IP 65/67
I/P VOLTAGE	220V, 110V / 12V, 24V
RATED POWER	7/12W
LUMEN FLUX	1440-1200 Lm
COLOR	R/G/B/Y/P/W/WW/ICE Blue
DIMENSION	360° Luminescence
APPLICATION	Outdoor, Name Board, Decorative Lights

Rs.245/- & Rs.325/-

ACCESSORIES



iLED NLA 06
360° HIGH VOLTAGE
POWER CORD

Rs.150/-



iLED NLA 07
360° LOW VOLTAGE
POWER CORD

Rs.50/-



iLED NLA 08
360° INTER
CONNECTOR

Rs.75/-



iLED NLA 09
CLIP & ENDCAP

Rs.10/-



iLED NLA 10(-)
360° JUNCTION
CONNECTOR

Rs.65/-



iLED NLA 11(L)
360° JUNCTION
CONNECTOR

Rs.65/-



iLED NLA 12(T)
360° JUNCTION
CONNECTOR

Rs.65/-



iLED NLA 13
360° PVC CORD
SLOT

Rs.100/-



iLED NLA 14
CLIP & ENDCAP

Rs.10/-



iLED NLA 15
LOW VOLTAGE
POWER CORD

Rs.50/-



iLED NLA 16
SIDE GLOW
MOUNTING GUIDE

Rs.10/-



iLED NLA 17
HIGH VOLTAGE
POWER CORD

Rs.150/-



iLED NLA 18
CLIP & ENDCAP

Rs.10/-

NEW



iLED 10 RDL NA COB IP67 01 LUXPRO®

MATERIAL	Ventilated Aluminum Cooling with polished reflector & Tempered glass
MOUNTING	Recessed Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	10W
LUMEN FLUX	1200-1000 Lm
COLOR	W/ WW/ NW
DIMENSION	D-100 X H-90 mm
CUT OUT DIA	90mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters etc
ANGLE	5°, 10°, 25°, 30°, 45°

Rs.1,850/-

NEW



iLED 15 RDL NA COB IP67 02 LUXPRO®

MATERIAL	Ventilated Aluminum Cooling with polished reflector & Tempered glass
MOUNTING	Recessed Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	15W
LUMEN FLUX	1800-1500 Lm
COLOR	W/ WW/ NW
DIMENSION	D-130 X H-95 mm
CUT OUT DIA	115mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters etc
ANGLE	5°, 10°, 25°, 30°, 45°

Rs.2,400/-

NEW




iLED 20 RDL NA COB IP67 03 LUXPRO®

MATERIAL	Ventilated Aluminum Cooling with polished reflector & Tempered glass
MOUNTING	Recessed Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	20W
LUMEN FLUX	2400-2000 Lm
COLOR	W/ WW/ NW
DIMENSION	D-160 X H-110 mm
CUT OUT DIA	140mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters etc
ANGLE	5°, 10°, 25°, 30°, 45°

Rs.4,000/-

NEW




iLED 30 RDL NA COB IP67 04 LUXPRO®

MATERIAL	Ventilated Aluminum Cooling with polished reflector & Tempered glass
MOUNTING	Recessed Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	30W
LUMEN FLUX	3600-3000 Lm
COLOR	W/ WW/ NW
DIMENSION	D-190 X H-130mm
CUT OUT DIA	175mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters etc
ANGLE	5°, 10°, 25°, 30°, 45°

Rs.5,200/-

NEW






iLED 40 RDL NA COB IP67 05 LUXPRO®

MATERIAL	Ventilated Aluminum Cooling with polished reflector & Tempered glass
MOUNTING	Recessed Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	40W
LUMEN FLUX	4800-4000 Lm
COLOR	W/ WW/ NW
DIMENSION	D-230 X H-140mm
CUT OUT DIA	200mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters etc
ANGLE	5°, 10°, 25°, 30°, 45°

Rs.6,200/-

iLED 10 PDL 01



MATERIAL

Powder coated Aluminium housing with PMMA high transitive milky diffuser

MOUNTING

Recessed Mount

I/P VOLTAGE

230VAC, 50/60Hz

RATED POWER

10W

LUMEN FLUX

1200- 1000Lm

COLOR

W/WW/NW

DIMENSION

D-138 x H-38mm

CUT OUT DIA




110mm

APPLICATION

Hotel, Show room, Home, Office, Auditorium, Theaters etc

Rs.900/-

iLED 16 PDL 02



MATERIAL

Powder coated Aluminium housing with PMMA high transitive milky diffuser

MOUNTING

Recessed Mount

I/P VOLTAGE

230VAC, 50/60Hz

RATED POWER

16W

LUMEN FLUX

1920- 1600 Lm

COLOR

W/WW/NW

DIMENSION

D-190 X H-38mm

CUT OUT DIA




160mm

APPLICATION

Hotel, Show room, Home, Office, Auditorium, Theaters etc

Rs.1,250/-

iLED 24 PDL 03



MATERIAL

Powder coated Aluminium housing with PMMA high transitive milky diffuser

MOUNTING

Recessed Mount

I/P VOLTAGE

230VAC, 50/60Hz

RATED POWER

24W

LUMEN FLUX

2880-2400Lm

COLOR

W/WW/NW

DIMENSION

D:225 X H:35mm

CUT OUT DIA




200mm

APPLICATION

Hotel, Show room, Home, Office, Auditorium, Theaters etc

Rs.1,450/-

iLED 7 SQ PDL 04



MATERIAL

Powder coated Aluminium housing with PMMA high transitive milky diffuser

MOUNTING

Recessed Mount

I/P VOLTAGE

230VAC, 50/60Hz

RATED POWER

7W

LUMEN FLUX

840 - 700 Lm

COLOR

W/WW/NW

DIMENSION

L-110 X W-110 X H-30mm


CUT OUT DIA

W- 93 X L- 93 mm

APPLICATION

Hotel, Show room, Home, Office, Auditorium, Theaters etc




Rs.750/-



iLED 16 SQ PDL 05

MATERIAL	Powder coated Aluminium housing with PMMA high transitive milky diffuser
MOUNTING	Recessed Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	16W
LUMEN FLUX	1920- 1600 Lm
COLOR	W/WW/NW
DIMENSION	L-178 X W-178 X H-32mm
CUT OUT DIA	L-152 X W-152 mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters etc




Rs.1,250/-



iLED 24 SQ PDL 06

MATERIAL	Powder coated Aluminium housing with PMMA high transitive milky diffuser
MOUNTING	Recessed Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	24W
LUMEN FLUX	2880-2400Lm
COLOR	W/WW/NW
DIMENSION	L-220 X W-220 X H-35mm
CUT OUT DIA	L-195 X W-195mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters etc



Rs.1,450/-

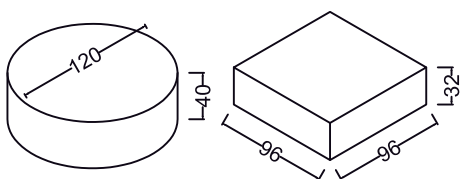

iLED 6 PDL 3IN 1 07

MATERIAL	Powder coated Aluminium housing with PMMA high transitive milky diffuser
MOUNTING	Recessed Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	6W
LUMEN FLUX	600-540 Lm
COLOR	W/WW/NW Together
DIMENSION RND	D-120 x H-40mm (RND)
DIMENSION SQ	L-96 x W-96 x H-32mm(SQ)
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters etc


Rs.550/-

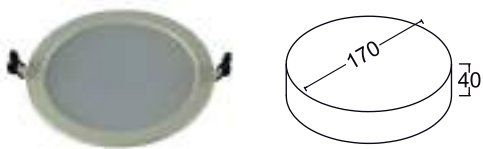

iLED 12 PDL 3IN 1 08


MATERIAL	Powder coated Aluminium housing with PMMA high transitive milky diffuser
MOUNTING	Recessed Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	12W
LUMEN FLUX	1200-1080 Lm
COLOR	W/WW/NW Together
DIMENSION RND	170 x 40mm(RND)
DIMENSION SQ	170 x 170 x 40mm(SQ)
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters etc

Rs.900/-

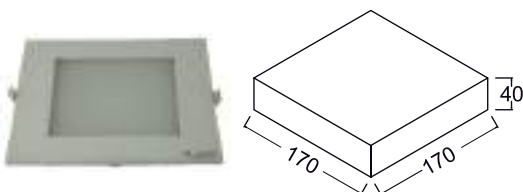

PANEL DOWN LIGHTS MILKY (BACK LIT)

iLED 18 PDL 3IN 1 09

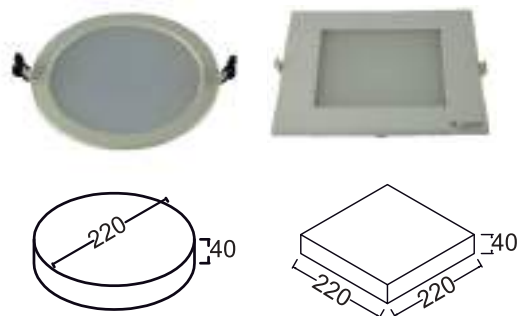

MATERIAL	Powder coated Aluminium housing with PMMA high transitive milky diffuser
MOUNTING	Recessed Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	18W
LUMEN FLUX	1800-1620 Lm
COLOR	W/WW/NW Together
DIMENSION RND	D-220 x H-40mm(RND)
DIMENSION SQ	L-220 x W-220 x H-40mm(SQ)
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters etc

Rs.1,250/-

iLED LUMI PANEL FRAMELESS 10




MATERIAL	Optical acrylic, SMD LED
POWER CONSUMPTION	Working Power 12V/24V,
POWER SUPPLY	Power Supply: 110V-240V
ADAPTER	1 pcs adapter with DC plug
POWER CONSUMPTION	Max 5/10 W/ft
TYPE	3D V-CUTTING TECHNOLOGY
COLOR	On request
DIMENSION	Customised DMX CONTROLLABLE
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters etc

Price on request

PANEL DOWN LIGHTS MILKY (EDGE LIT)


iLED 3 SLPDL RND 11

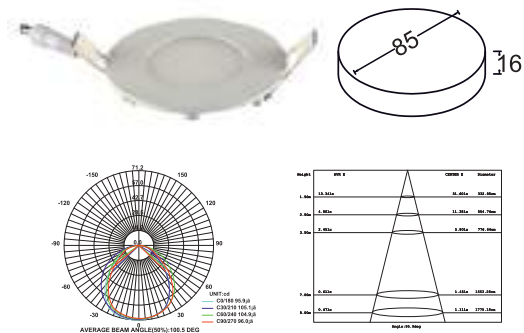

MATERIAL	Ventilated Powder coated Die cast Aluminium with Milky Diffuser
MOUNTING	Recess Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	3W
LUMEN FLUX	360-300Lm
COLOR	W/WW / NW
DIMENSION	D-85 X H-16mm
CUT OUT DIA	D-70mm
APPLICATION	Hotel, Showroom, Home, Office, Auditorium, Theatres Etc


Rs.320/-

iLED 3 SLPDL SQ 12

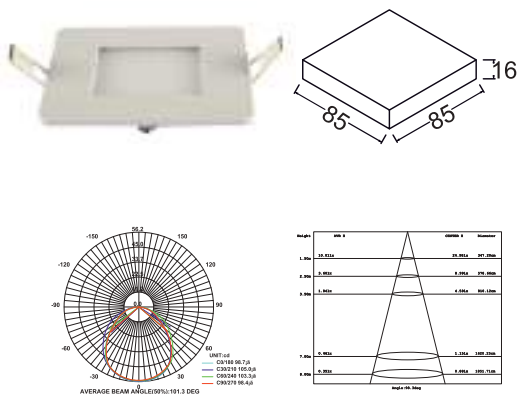

MATERIAL	Ventilated Powder coated Die cast Aluminium with Milky Diffuser
MOUNTING	Recess Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	3W
LUMEN FLUX	360-300Lm
COLOR	W/WW/ NW
DIMENSION	L-85 X W-85 X H-16mm
CUT OUT DIA	L-70 X W-70mm
APPLICATION	Hotel, Showroom, Home, Office, Auditorium, Theatres Etc



Rs.320/-

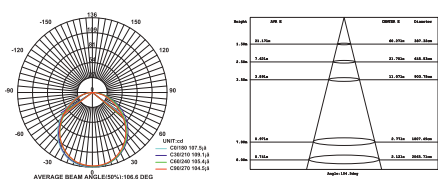

iLED 6 SLPDL RND 13

MATERIAL	Ventilated Powder coated Die cast Aluminium with Milky Diffuser
MOUNTING	Recess Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	6W
LUMEN FLUX	720-600Lm
COLOR	W/WW/ NW
DIMENSION	D-120 X H-16mm
CUT OUT DIA	D-105mm
APPLICATION	Hotel, Showroom, Home, Office, Auditorium, Theatres Etc


Rs.580/-

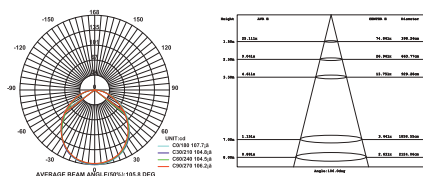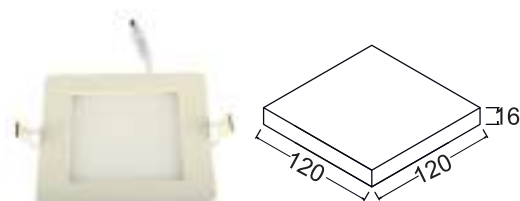

iLED 6 SLPDL SQ 14

MATERIAL	Ventilated Powder coated Die cast Aluminium with Milky Diffuser
MOUNTING	Recess Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	6W
LUMEN FLUX	720-600Lm
COLOR	W/WW/ NW
DIMENSION	L-120 X W-120 X H-16mm
CUT OUT DIA	L-108 X W-108mm
APPLICATION	Hotel, Showroom, Home, Office, Auditorium, Theatres Etc



Rs.580/-

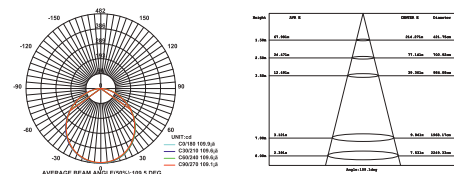

iLED 12 SLPDL RND 15

MATERIAL	Ventilated Powder coated Die cast Aluminium with Milky Diffuser
MOUNTING	Recess Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	12W
LUMEN FLUX	1440-1200Lm
COLOR	W/WW/ NW
DIMENSION	D-170 X H-16mm
CUT OUT DIA	D-155mm
APPLICATION	Hotel, Showroom, Home, Office, Auditorium, Theatres Etc




Rs.850/-

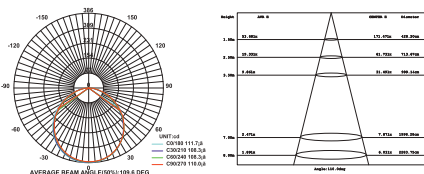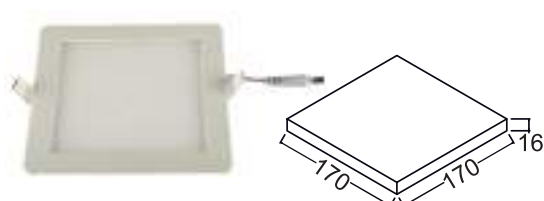

iLED 12 SLPDL SQ 16

MATERIAL	Ventilated Powder coated Die cast Aluminium with Milky Diffuser
MOUNTING	Recess Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	12W
LUMEN FLUX	1440-1200Lm
COLOR	W/WW/ NW
DIMENSION	L-170 X W-170 X H-16mm
CUT OUT DIA	L-155 X W-155mm
APPLICATION	Hotel, Showroom, Home, Office, Auditorium, Theatres Etc




Rs.850/-



iLED 15 SLPDL RND 17

MATERIAL	Ventilated Powder coated Die cast Aluminium with Milky Diffuser
MOUNTING	Recess Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	15W
LUMEN FLUX	1800-1500Lm
COLOR	W/WW/ NW
DIMENSION	D-190 X H-16mm
CUT OUT DIA	D-175mm
APPLICATION	Hotel, Showroom, Home, Office, Auditorium, Theatres Etc




Rs.1,080/-



iLED 15 SLPDL SQ 18

MATERIAL	Ventilated Powder coated Die cast Aluminium with Milky Diffuser
MOUNTING	Recess Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	15W
LUMEN FLUX	1800-1500Lm
COLOR	W/WW/ NW
DIMENSION	L-190 X W-190 X H-16mm
CUT OUT DIA	L-176 X W-176mm
APPLICATION	Hotel, Showroom, Home, Office, Auditorium, Theatres Etc




Rs.1,080/-



iLED 18 SLPDL RND 19

MATERIAL	Ventilated Powder coated Die cast Aluminium with Milky Diffuser
MOUNTING	Recess Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	18W
LUMEN FLUX	2160-1800Lm
COLOR	W/WW/ NW
DIMENSION	D-220 X H-16mm
CUT OUT DIA	D-205mm
APPLICATION	Hotel, Showroom, Home, Office, Auditorium, Theatres Etc


Rs.1,350/-



iLED 18 SLPDL SQ 20

MATERIAL	Ventilated Powder coated Die cast Aluminium with Milky Diffuser
MOUNTING	Recess Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	18W
LUMEN FLUX	2160-1800Lm
COLOR	W/WW/ NW
DIMENSION	L-220 X W-220 X H-16mm
CUT OUT DIA	L-205 X W-205mm
APPLICATION	Hotel, Showroom, Home, Office, Auditorium, Theatres Etc


Rs.1,350/-

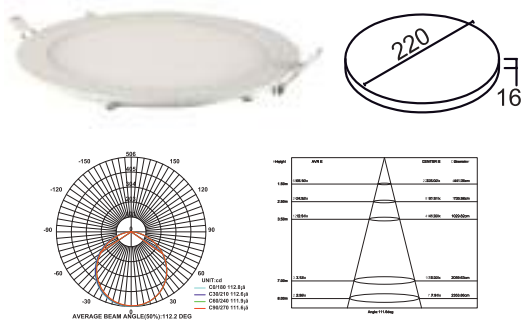

iLED 22 SLPDL RND 21

MATERIAL	Ventilated Powder coated Die cast Aluminium with Milky Diffuser
MOUNTING	Recess Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	22W
LUMEN FLUX	2640-2200Lm
COLOR	W/WW/ NW
DIMENSION	D-220 X H-16mm
CUT OUT DIA	D-205mm
APPLICATION	Hotel, Showroom, Home, Office, Auditorium, Theatres Etc


Rs.1,500/-

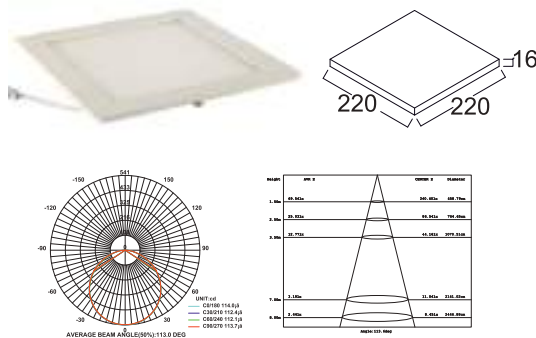

iLED 22 SLPDL SQ 22

MATERIAL	Ventilated Powder coated Die cast Aluminium with Milky Diffuser
MOUNTING	Recess Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	22W
LUMEN FLUX	2640-2200Lm
COLOR	W/WW/ NW
DIMENSION	L-220 X W-220 X H-16mm
CUT OUT DIA	L-205 X W-205mm
APPLICATION	Hotel, Showroom, Home, Office, Auditorium, Theatres Etc


Rs.1,500/-

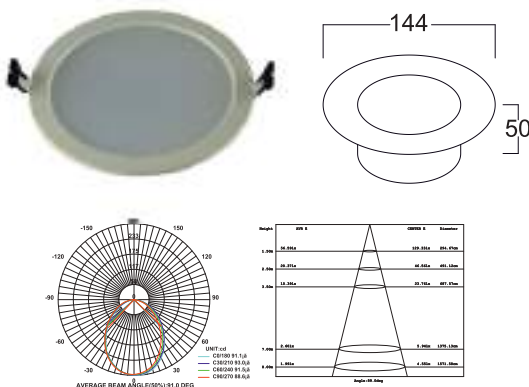

iLED 9 RDL 23

MATERIAL	Powder coated Aluminium housing with PMMA high transitive milky diffuser
MOUNTING	Recessed Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	9 W
LUMEN FLUX	1080-900Lm
COLOR	W/WW/ NW
DIMENSION	D-144 X H-50mm
CUT OUT DIA	114 mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters.

Rs.1,050/-

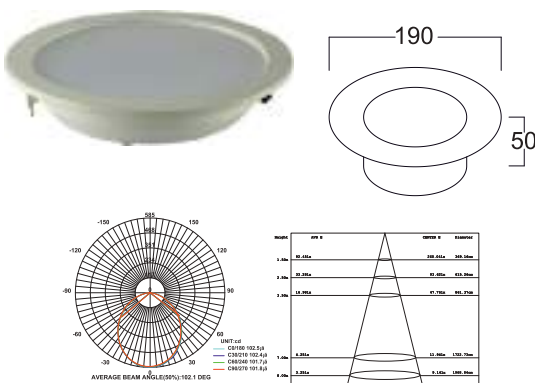

iLED 18 RDL 24 ECO

MATERIAL	Powder coated Aluminium housing with PMMA high transitive milky diffuser
MOUNTING	Recessed Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	18 W
LUMEN FLUX	2160-1800 Lm
COLOR	W/WW/ NW
DIMENSION	D-190 X H-50mm
CUT OUT DIA	156 mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters

Rs.1,750/-


iLED 100 PIR 01



MATERIAL	Plastic housing with PIR sensor
I/P VOLTAGE	I/P VOLTAGE : 230VAC, 50/60Hz
DURATION TIME	Duration Time:10S to 4Min adjustable
RATED POWER	100W
DETECTION RANGE	180deg
LUS CONTROL LEVEL	2-2000 lux adjustable
DIMENSION	D -100 X H-35 mm
APPLICATION	Corridor, Garage, Balcony, Warehouse, Kitchen, Cloakroom, Storage, Toilet

Rs.1,150/-

iLED 1000 PIR 02

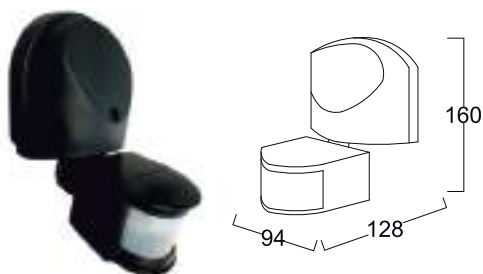


MATERIAL	Plastic housing with PIR sensor
I/P VOLTAGE	230VAC, 50/60Hz
DURATION TIME	10S to 4Min adjustable
RATED POWER	1000W
DETECTION RANGE	180deg
LUS CONTROL LEVEL	2-2000 lux adjustable
DIMENSION	94 X 128X 160mm
APPLICATION	Corridor, Garage, Balcony, Warehouse, Kitchen, Cloakroom, Storage, Toilet

Rs.1,550/-

ANTI STUMBLE LIGHTS


iLED 1.3 ASL 01

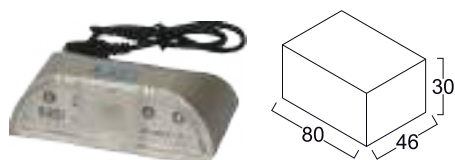

MATERIAL	Plastic housing with PIR sensor
MOUNTING	Surface Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	1.3W
LUMEN FLUX	90-70 Lm
COLOR	W/WW
DIMENSION	L-80 X W-46 X H-30mm
DIMENSION BOX	90 X50 X40 mm
APPLICATION	Bedroom, Staircase, Door Key Hole, Passage, Corridor, Toilet

Rs.2,076/-


iLED 15/24 CDL 11 01

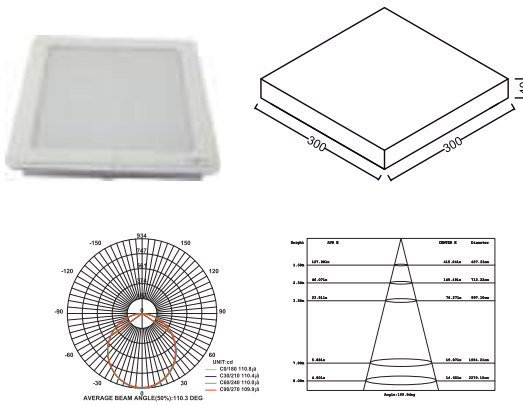

MATERIAL	Abs plastic with PMMA high transitive milky diffuser
MOUNTING	Recess / Surface Mount
I/P VOLTAGE	230V AC, 50/60Hz
RATED POWER	15 / 30 W
LUMEN FLUX	~120 Lm per Watt
COLOR	W/ WW / NW
DIMENSION	L - 300 X W - 300 X H - 40mm
CUT OUT DIA	275X 275 X40mm
DIMENSION (BOX)	350 X 350 X 100 mm Each Box contains 2 Nos
APPLICATION	Commercial Office, Showrooms, Parking, Corridors, Industries, etc.,

Rs.3,000 / 3,500/-


iLED 30 / 60 CDL 21 02

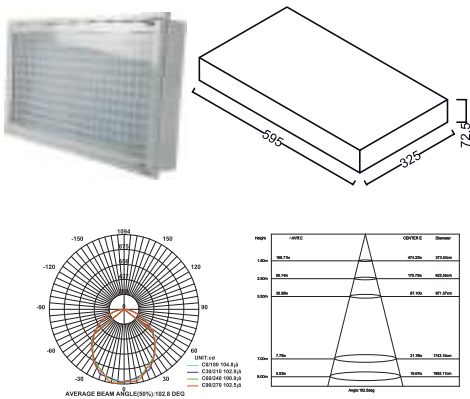

MATERIAL	Sheet metal with PMMA high transitive milky diffuser
MOUNTING	Recess/Surface Mount
I/P VOLTAGE	230V AC, 50/60Hz
RATED POWER	30 / 60 W
LUMEN FLUX	~120 Lm per Watt
COLOR	W/ WW / NW
DIMENSION	L - 595 X W - 325 X H - 72.5 mm
CUT OUT DIA	575X 305 mm
DIMENSION (BOX)	620 X 375 X165 mm Each Box contains 2 Nos
APPLICATION	Commercial Office, Showrooms, Parking, Corridors, Industries, etc.,

Rs.4,500 / 6,000


iLED 40 CDL 14 03

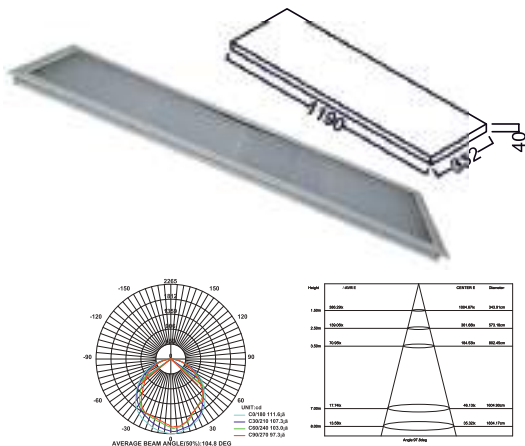

MATERIAL	Sheet metal with PMMA high transitive milky diffuser
MOUNTING	Recess/Surface Mount
I/P VOLTAGE	230V AC, 50/60Hz
RATED POWER	40 / 60 / 120W
LUMEN FLUX	~120 Lm per Watt
COLOR	W/ WW / NW
DIMENSION	L - 1190 X W - 332 X H - 40 mm
CUT OUT DIA	1162X 304mm
DIMENSION (BOX)	1250 X 390 X90 mm Each Box contains 2 Nos
APPLICATION	Commercial Office, Showrooms, Parking, Corridors, Industries, etc.,


Rs.6,500 / 7,500 / 10,500

iLED 40 CDL 22 04 BACKLIT

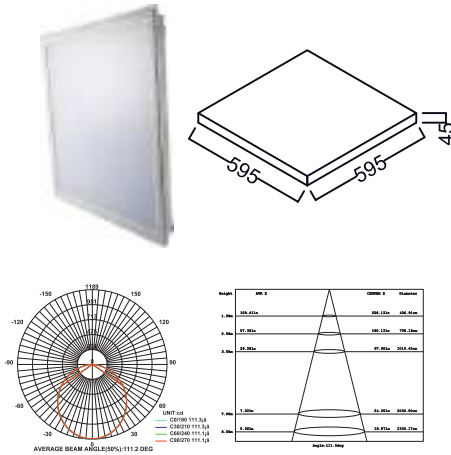

MATERIAL	Abs plastic with PMMA high transitive milky diffuser
MOUNTING	Recess/Surface Mount
I/P VOLTAGE	230V AC, 50/60Hz
RATED POWER	40 / 60 / 120W
LUMEN FLUX	~120 Lm per Watt
COLOR	W/ WW / NW
DIMENSION	L - 595 X W - 595 X H - 45mm
CUT OUT DIA	570X 570 mm
DIMENSION (BOX)	620 X 620 X 70 mm Each Box contains 1 No
APPLICATION	Commercial Office, Showrooms, Parking, Corridors, Industries, etc.,

Rs.6,500 / 7,500 / 10,500

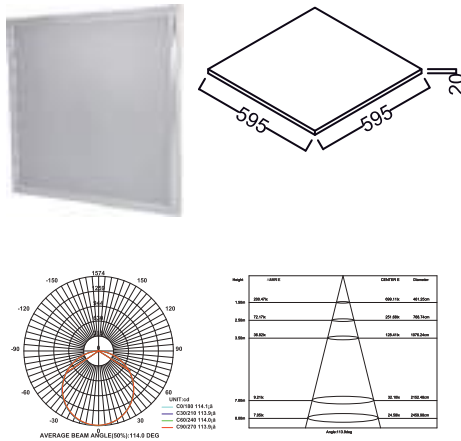

iLED 50 CDL 22 05 EDGELIT

MATERIAL	Sheet metal with PMMA high transitive with milky diffuser
MOUNTING	Grid Ceiling Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	50W
LUMEN FLUX	6000-5000Lm
COLOR	W/ WW / NW
DIMENSION	L - 595 X W - 595 X H - 20mm
DIMENSION (BOX)	620 X 620 X 30 mm Each Box contains 2 Nos
APPLICATION	Commercial Office, Showrooms, Parking, Corridors, Industries, etc.,

Rs.4,500



iLED 200-RGBA-01

MATERIAL	50 Pc Tube Milky White /Transparent
I/P VOLTAGE	I/P VOLTAGE : 12V/24V DC
RATED POWER	13W/m /12 W/m
DIMENSION	L-375 X W-290 X H-100mm
APPLICATION	Decoration for bar, cafe, disco ,Shows, events lighting, Other outdoor lighting

Price on request



iLED 200-RGBB-02

MATERIAL	50 Pc Tube Milky White /Transparent
I/P VOLTAGE	12V/24V DC
RATED POWER	6 W/m
DIMENSION	L-1030 X W-302 X H-268mm
APPLICATION	Decoration for bar, cafe, disco , Shows, events lighting, Other outdoor lighting

Price on request



iLED 495-26 RGBB-03

MATERIAL	DC 30 Pc Tube Milky White /Transparent
I/P VOLTAGE	12V/24V DC
RATED POWER	13 W/m
DIMENSION	L-0.5/1/1.5/2m/3m
APPLICATION	Decoration for bar, cafe, disco, Shows, events lighting, Other outdoor lighting


Price on request

iLED 1 ES 01 SS G/RECO


MATERIAL	Aluminum casing with transparent / printed acrylic or Glass
MOUNTING	Suspended
I/P VOLTAGE	230V AC, 50/60Hz
RATED POWER	1W
LUMEN FLUX	25Lm
COLOR	R/G
DIMENSION	L-360 X W-25 X H -150 mm
APPLICATION	Emergency / Fire exit and Signage

Rs.1,900/-**iLED 1 ES 02 DS G/R-ECO**

MATERIAL	Aluminum casing with transparent / printed acrylic or Glass
MOUNTING	Suspended
I/P VOLTAGE	230V AC, 50/60Hz
RATED POWER	1W
LUMEN FLUX	25Lm
COLOR	R/G
DIMENSION	L-360 X W-25 X H -150 mm
APPLICATION	Emergency / Fire exit and Signage

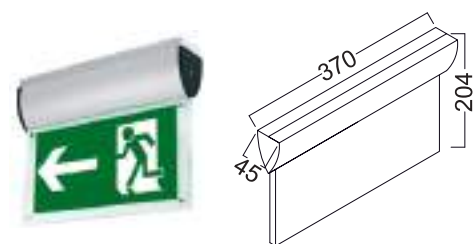Rs.2,350/-**iLED 3 ES 03 G/R**


MATERIAL	Aluminum casing with transparent / printed acrylic or Glass
MOUNTING	Suspended
I/P VOLTAGE	230V AC, 50/60Hz
RATED POWER	3W
LUMEN FLUX	25Lm
COLOR	R/G
DIMENSION	L 370 X W 45 X H 204 mm
APPLICATION	Emergency / Fire exit and Signage

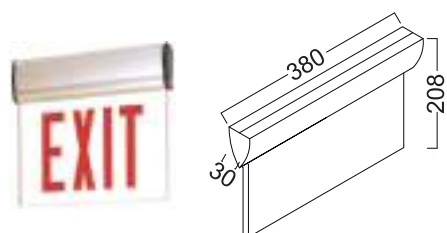Rs.2,750/-**iLED 3 ES 04 G/R/RGB**

MATERIAL	Aluminum casing with transparent / printed acrylic or Glass
MOUNTING	Suspended
I/P VOLTAGE	230V AC, 50/60Hz
RATED POWER	3W
LUMEN FLUX	25Lm
COLOR	R/G
DIMENSION	L-380 X W-30 X H-208 mm
APPLICATION	Emergency / Fire exit and Signage

Rs.2,950/-

iLED 15 Solar Street Light System S01

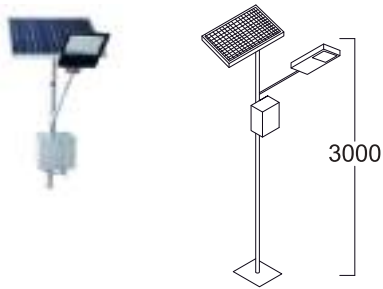

SOLAR PANEL	30Wp x 1 No
BATTERY	12V 40Ah x 1 No
RECOMMENDED POLE HEIGHT	3Meters
PANEL DIMENSION	665 x665x38 mm
BATTERY DIMENSIONS	L-98 X W-98 X H-300 mm
BACK UP TIME	20 - 24 Hours
RATING	IP 65/67
APPLICATION	Roads, Pathway, Garden

Price on request

iLED 20 Solar Street Light System S02



SOLAR PANEL	60Wp x 1 No
BATTERY	12V 60Ah x 1 No
RECOMMENDED POLE HEIGHT	3.5M
PANEL DIMENSION	665x665x38 mm
BATTERY DIMENSIONS	L-98 X W-98 X H-300 mm
BACK UP TIME	20 - 24 Hours
RATING	IP 65/67
APPLICATION	Roads, Pathway, Garden

Price on request


iLED 40 Solar Street Light System S03



SOLAR PANEL	120Wp x 1 No
BATTERY	12V 100Ah x 1 No
RECOMMENDED POLE HEIGHT	4 M
PANEL DIMENSION	1480x665x35mm
BATTERY DIMENSIONS	L-142 X W-172 X H-378 mm
BACK UP TIME	20 - 24 Hours
RATING	IP 65/67
APPLICATION	Roads, Pathway, Garden

Price on request


iLED Solar 60-70 Solar Street Light System S04

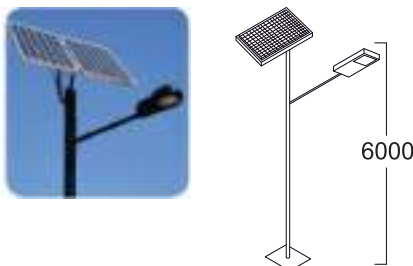

SOLAR PANEL	100Wp x 2 Nos
BATTERY	12V 100Ah x 2 Nos
RECOMMENDED POLE HEIGHT	6 M
PANEL DIMENSION	1325x665x35mm
BATTERY DIMENSIONS	L-142 X W-172 X H-378 mm
BACK UP TIME	20 - 24 Hours
RATING	IP 65/67
APPLICATION	Roads, Pathway, Garden

Price on request


iLED 80-90 Solar Street Light System S05



SOLAR PANEL	130Wp x 2 Nos
BATTERY	12V 130Ah x 2 Nos
RECOMMENDED POLE HEIGHT	7 M
PANEL DIMENSION	1480x665x35mm
BATTERY DIMENSIONS	L-142 XW-172 X H-378 mm
BACK UP TIME	20 - 24 Hours
RATING	IP 65/67
APPLICATION	Roads, Pathway, Garden

Price on request


iLED 120 Solar Street Light System S06



SOLAR PANEL	190Wp*2Nos
BATTERY	12V 150Ah x 2 Nos
RECOMMENDED POLE HEIGHT	8.5 M
PANEL DIMENSION	L-1630 x W-840 x H-35mm
BACK UP TIME	20 - 24 Hours
RATING	IP 65/67
APPLICATION	Roads, Pathway, Garden

Price on request


iLED 150 Solar Street Light System S07



SOLAR PANEL	220Wp x 2 Nos
BATTERY	12V 180Ah x 2 Nos
RECOMMENDED POLE HEIGHT	10 M
PANEL DIMENSION	1635x990x35mm
BATTERY DIMENSIONS	L-142 XW-172 X H378 mm
BACK UP TIME	20 - 24 Hours
RATING	IP 65/67
APPLICATION	Roads, Pathway, Garden

Price on request


iLED 180 Solar Street Light System S08



SOLAR PANEL	250Wp x 2 Nos
BATTERY	12V 200Ah x 2 Nos
RECOMMENDED POLE HEIGHT	12 M
PANEL DIMENSION	1635x990x35mm
BATTERY DIMENSIONS	L-187 X W-187 X H-440 mm
BACK UP TIME	20 - 24 Hours
RATING	IP 65/67
APPLICATION	Roads, Pathway, Garden

Price on request


iLED 20 Solar Street Light System S09

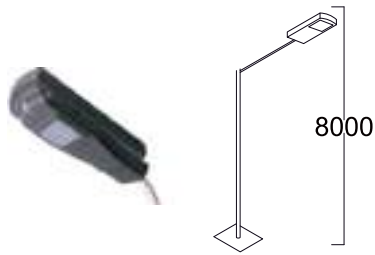

SOLAR PANEL	6V / 15W Panel
BATTERY	6V 5000mAh x 2 Nos
RECOMMENDED POLE HEIGHT	8 M
PANEL DIMENSION	171x291mm
LIGHT DIMENSIONS	L-200 XW-390mm
BACK UP TIME	12 - 18 Hours
IP RATING	IP 65/67
PRODUCT FUNCTION	Radar Sensor+ Light control
EXPOSURE AREA	60 Square meter
APPLICATION	Roads, Pathway, Garden

Price on request


iLED 40 Solar Street Light System S10

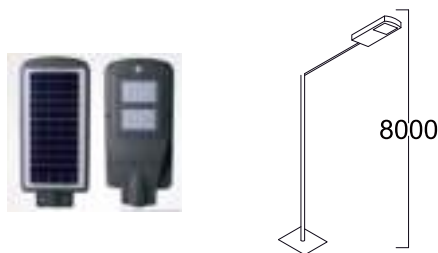

SOLAR PANEL	6V / 20W Panel
BATTERY	6V 5000mAh x 3 Nos
RECOMMENDED POLE HEIGHT	8 M
PANEL DIMENSION	383x193mm
LIGHT DIMENSIONS	L-500 XW-230mm
BACK UP TIME	12 - 18 Hours
IP RATING	IP 65/67
PRODUCT FUNCTION	Radar Sensor+ Light control
EXPOSURE AREA	80 Square meter
APPLICATION	Roads, Pathway, Garden

Price on request


iLED 60 Solar Street Light System S11

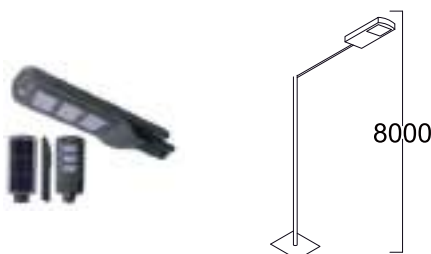

SOLAR PANEL	6V / 30W Panel
BATTERY	6V 5000mAh x 4 Nos
RECOMMENDED POLE HEIGHT	8 M
PANEL DIMENSION	498x208mm
LIGHT DIMENSIONS	L-620 XW-240mm
BACK UP TIME	12 - 18 Hours
IP RATING	IP 65/67
PRODUCT FUNCTION	Radar Sensor+ Light control
EXPOSURE AREA	110 Square meter
APPLICATION	Roads, Pathway, Garden

Price on request

iLED 4 MR16 01

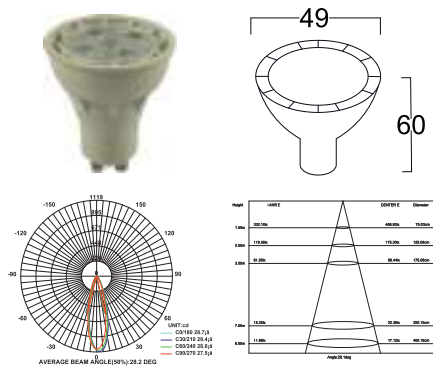

MATERIAL

Thermo Plastic Housing with PMMA lens Milky

MOUNTING

GU10 / External Power Supply

I/P VOLTAGE

230V AC, 50/60Hz

RATED POWER

4W

LUMEN FLUX

480-360 Lm

COLOR

W/ WW/ NW

DIMENSION

D-49 X H-60mm


APPLICATION

Hotel, Show room, Home, Office,
Theaters, Auditorium Etc
5°, 10°, 25°, 30°, 45°

ANGLE

Rs.350/-

iLED 5 MR16 02

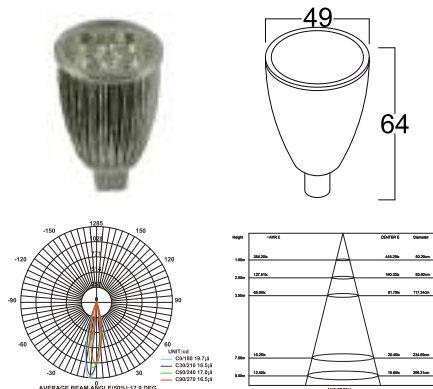

MATERIAL

Ventilated Aluminum Cooling with PMMA lens

MOUNTING

Retrofit E27/ B22/ GU10/E14/ External Power Supply

I/P VOLTAGE

230V AC, 50/60Hz

RATED POWER

5W

LUMEN FLUX

500-400 Lm

COLOR

W/ WW/ NW

DIMENSION

D-49 X H-64mm


APPLICATION

Hotel, Show room, Home, Office,
Theaters, Auditorium Etc
5°, 10°, 25°, 30°, 45°

ANGLE

Rs.450/-

iLED 6 MR16 03

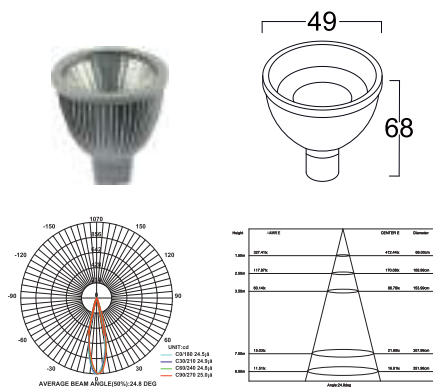

MATERIAL

Ventilated Aluminum Cooling with Reflector & Glass

MOUNTING

Retrofit E27/ B22/ GU10/E14/External Power Supply

I/P VOLTAGE

230V AC, 50/60Hz

RATED POWER

6W

LUMEN FLUX

600- 500Lm

COLOR

W/ WW/ NW

DIMENSION

D-49 X H-68mm


APPLICATION

Hotel, Show room, Home, Office,
Theaters, Auditorium Etc
5°, 10°, 25°, 30°, 45°

ANGLE

Rs.450/-

iLED 8 MR16 04

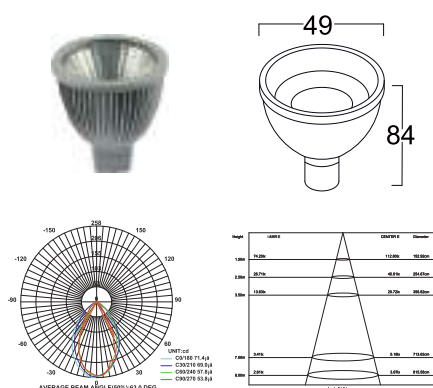

MATERIAL

Ventilated Aluminum Cooling with Reflector & Glass

MOUNTING

Retrofit E27/ B22/ GU10/E14/External Power Supply

I/P VOLTAGE

230V AC, 50/60Hz

RATED POWER

8W

LUMEN FLUX

700 -600Lm

COLOR

W/ WW/ NW

DIMENSION

D-49 X H-84mm


APPLICATION

Hotel, Show room, Home, Office,
Theaters, Auditorium Etc
5°, 10°, 25°, 30°, 45°

ANGLE

Rs.550/-

iLED 8 MR16 COB 05

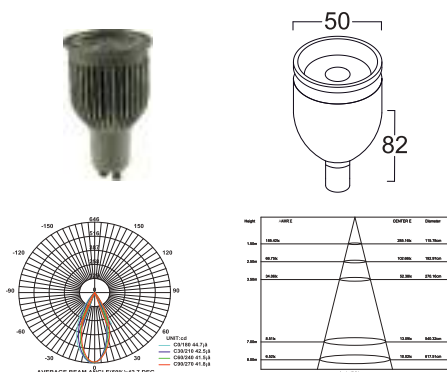

MATERIAL

Ventilated Aluminum Cooling with PMMA lens

MOUNTING

Retrofit E27/ B22/ GU10/External Power Supply

I/P VOLTAGE

230V AC, 50/60Hz

RATED POWER

8 W

LUMEN FLUX

960- 800Lm

COLOR

W/ WW/ NW

DIMENSION

D-50 X H-82mm

APPLICATION

Hotel, Show room, Home, Office,


Theaters, Auditorium Etc

ANGLE

5°, 10°, 25°, 30°, 45°

Rs.750/-

iLED 12-15 AR 111 COB 06

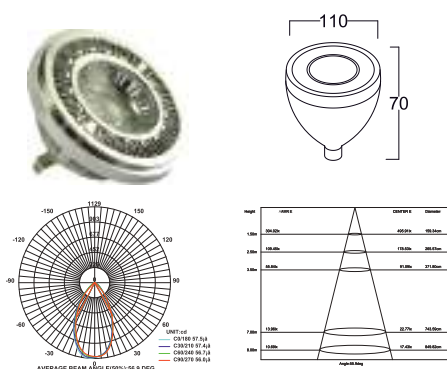

MATERIAL

Ventilated Aluminum Cooling with PMMA lens

MOUNTING

Retrofit with External Power Supply

I/P VOLTAGE

230V AC, 50/60Hz

RATED POWER

12-15W

LUMEN FLUX

1500 - 1350Lm

COLOR

W/WW

DIMENSION

D-110 x H-70mm

APPLICATION

Hotel, Show room, Home, Office,


Theaters, Auditorium Etc

ANGLE

5°, 10°, 25°, 30°, 45°

Rs.1,050/-

iLED 12 MR16 COB 07

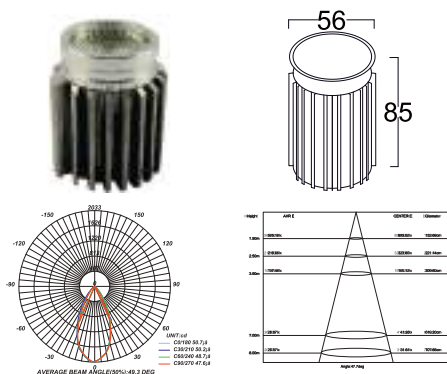

MATERIAL

Ventilated Aluminum Cooling Die Cast with PMMA lens

MOUNTING

Retrofit with External Power Supply

I/P VOLTAGE

230V AC, 50/60Hz

RATED POWER

12W

LUMEN FLUX

1440- 1200Lm

COLOR

W/ WW/ NW

DIMENSION

D-56 X H-85mm

APPLICATION

Hotel, Show room, Home, Office,


Auditorium, Theaters etc

ANGLE

5°, 10°, 25°, 30°, 45°

Rs.950/-

iLED 12 MR16 COB 08

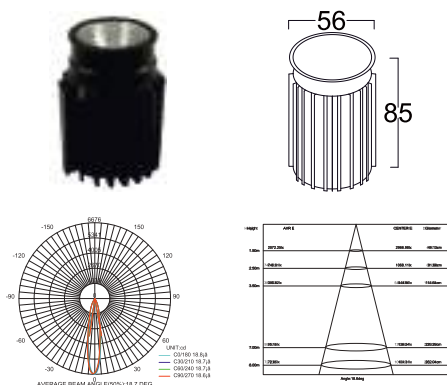

MATERIAL

Ventilated Aluminum Cooling Die Cast with polished Reflector

MOUNTING

Retrofit with External Power Supply

I/P VOLTAGE

230V AC, 50/60Hz

RATED POWER

12W

LUMEN FLUX

1440- 1200Lm

COLOR

W/ WW/ NW

DIMENSION

D-56 X H-85mm

APPLICATION

Hotel, Show room, Home, Office,


Auditorium, Theaters etc

ANGLE

5°, 10°, 25°, 30°, 45°

Rs.950/-

iLED 12 MR16 COB 09

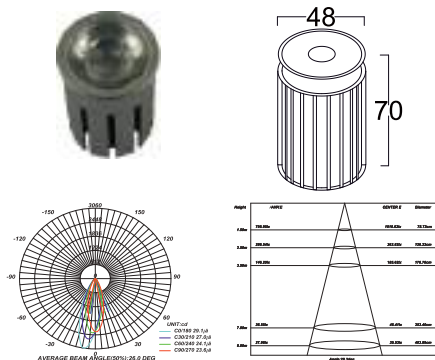


MATERIAL
MOUNTING
I/P VOLTAGE
RATED POWER
LUMEN FLUX
COLOR
DIMENSION
APPLICATION

Ventilated Aluminum Extrusion Cooling with PMMA lens
Retrofit with External Power Supply
230V AC, 50/60Hz
12W
1440- 1200Lm
W/ WW/ NW
D-48 X H-70mm
Hotel, Show room, Home, Office,
Auditorium, Theaters etc

Rs.950/-

NEW

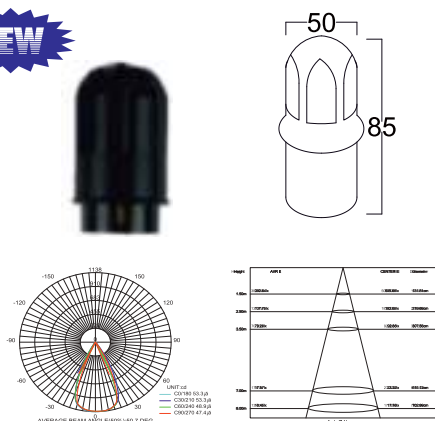


iLED 12 MR16 COB 10 LUXPRO®

MATERIAL
MOUNTING
ANGLE
I/P VOLTAGE
RATED POWER
LUMEN FLUX
COLOR
DIMENSION
APPLICATION

Ventilated Aluminum Cooling Die Cast with PMMA lens
Retrofit with External Driver
10-60 Deg Adjustable
230V AC, 50/60Hz
12W
1440- 1200Lm
W/ WW/ NW
D-50 X H-85mm
Hotel, Show room, Home, Office,
Auditorium, Theaters etc

Rs.1,490/-

iLED 18 PLC 12

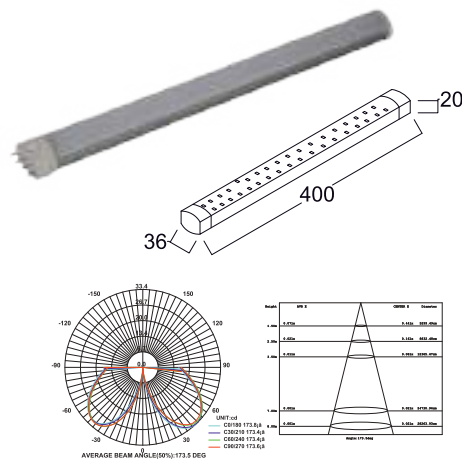


MATERIAL
MOUNTING
I/P VOLTAGE
RATED POWER
LUMEN FLUX
COLOR
DIMENSION
DIMENSION (Box)
APPLICATION

Aluminium Housing with polycarbonate Milky cover
Retrofit 2G11
230VAC, 50/60Hz
18W
1700-1540 Lm
W/WW / NW
L-400 X H-20 X W36mm
W-40 X H-85mm
Office, Hotels, Restaurants, Super Markets,
Home, Hospitals Etc.,

Rs.750/-

iLED 24 PLC 13

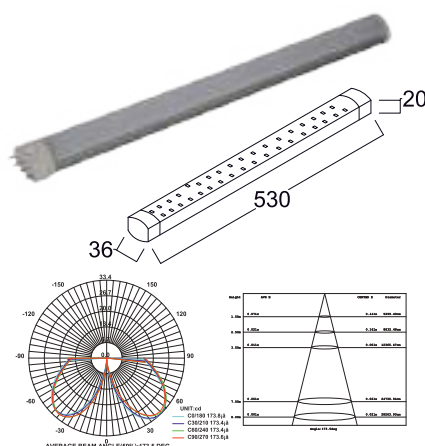

MATERIAL
MOUNTING
I/P VOLTAGE
RATED POWER
LUMEN FLUX
COLOR
DIMENSION
DIMENSION (Box)
APPLICATION

Aluminium Housing with polycarbonate Milky cover
Retrofit 2G11
230VAC, 50/60Hz
24W
300-2060 Lm
W/WW / NWD)
L-530 X H-20 X W-36mm
L-530 X W36 X H 20mm
Office, Hotels, Restaurants, Super Markets,
Home, Hospitals Etc.,


Rs.950/-



iLED 160 TH 226 - RGB PAR CAN

MATERIAL	ABS Engineering plastic with Aluminum heatsink with PMMA lens
MOUNTING	Surface Mount using Aluminium clamps Adjustable
I/P VOLTAGE	230V AC, 50/60Hz
RATED POWER	160 W
LUMEN FLUX	120-60Lm
COLOR	W /WW / NW / RGB
DIMENSION	D-255 X H-365 mm
APPLICATION	Decorative Lighting, Wash walls of buildings, Clubs, Hotels, Stages, Parks, Plazas, Commercial Building Facades, Art Galleries, etc.,

Rs.12,750/-

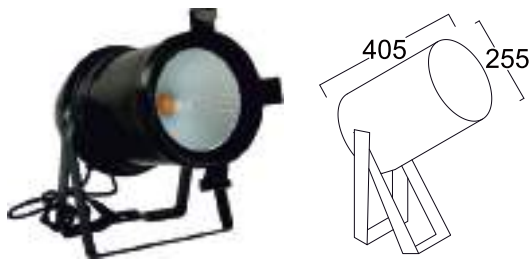

iLED 120 TH 251 - PAR CAN

MATERIAL	ABS Engineering plastic with Aluminum heatsink with Polished Reflector & tempered glass
MOUNTING	Surface Mount using Aluminium clamps Adjustable
I/P VOLTAGE	230V AC, 50/60Hz
RATED POWER	120 W
LUMEN FLUX	120-60Lm
COLOR	W /WW / NW / RGB
DIMENSION	D-255 X H-405 mm
APPLICATION	Decorative Lighting, Wash walls of buildings, Clubs, Hotels, Stages, Parks, Plazas, Commercial Building Facades, Art Galleries, etc.,


Rs.14,000/-



iLED 150 TH 329 - LED PROFILE SPOT LIGHT

MATERIAL	ABS Engineering plastic with Aluminum heatsink with PMMA lens & tempered glass
MOUNTING	Surface Mount using Aluminium clamps Adjustable
I/P VOLTAGE	230V AC, 50/60Hz
RATED POWER	150 W
LUMEN FLUX	120-60Lm
COLOR	W /WW / NW / RGB
DIMENSION	D-300 X H-700 mm
APPLICATION	Decorative Lighting, Wash walls of buildings, Clubs, Hotels, Stages, Parks, Plazas, Commercial Building Facades, Art Galleries, etc.,

Rs.29,000/-



iLED 180 TH 337 - LED PROFILE SPOT LIGHT

MATERIAL

ABS Engineering plastic with Aluminum heatsink with PMMA lens & tempered glass

MOUNTING

Surface Mount using Aluminium clamps Adjustable

I/P VOLTAGE

230V AC, 50/60Hz

RATED POWER

180 W

LUMEN FLUX

120-60Lm

COLOR

W /WW / NW / RGB

DIMENSION

D-350 X H-850 mm

APPLICATION

Decorative Lighting, Wash walls of buildings, Clubs, Hotels, Stages, Parks, Plazas, Commercial Building Facades, Art Galleries, etc.,

Rs.56,500/-


iLED 14 ST 01



MATERIAL	PC with toughened Glass
MOUNTING	Aluminum / GI Pole
I/P VOLTAGE	230V AC, 50/60Hz
RATED POWER	14W
LUMEN FLUX	1680-1400Lm
COLOR	W/WW / NW
IP RATING	IP 65/67
DIMENSION	L-315 X H-65 X W-95mm
POLE	3Mtrs
APPLICATION	Streets / Roads, Pathway, Garden, Stadium, HiMast

Rs.750/-


iLED 20 / 30 / 45 / 60 / 90 ST 02

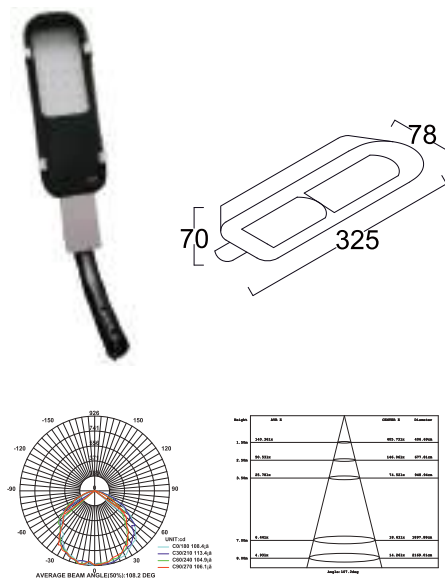

MATERIAL	Powder coated aluminum Die casting with PMMA lens (optional) & tempered glass
MOUNTING	Aluminum / GI Pole
I/P VOLTAGE	230V AC, 50/60Hz
RATED POWER	20/25W
LUMEN FLUX	2400-2000/3000-2500 Lm
COLOR	W/WW / NW
IP RATING	IP 65/67
DIMENSION	L-78 X W-70 x H-325mm
POLE	3Mtrs
APPLICATION	Streets / Roads, Pathway, Garden, Stadium, HiMast

Rs.1,900 / 2,050 / 2,850 / 4,050 / 5,600/-


iLED 40 ST 03

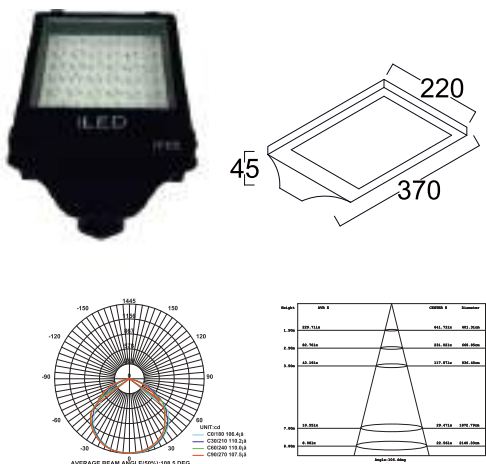

MATERIAL	Powder coated aluminum Die casting with PMMA lens (optional) & tempered glass
MOUNTING	Aluminum / GI Pole
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	40W
LUMEN FLUX	4320-3600 Lm
COLOR	W/WW / NW
IP RATING	IP 65/67
DIMENSION	L-370 X H-45 X W - 220 mm
POLE	5Mtrs
APPLICATION	Streets / Roads, Pathway, Garden, Stadium, HiMast

Rs.3,500/-

iLED 60 ST 04

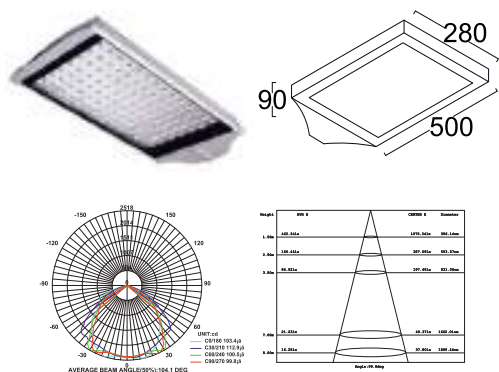

MATERIAL

Ventilated Aluminum extrusion with aluminum casting, Reflector PMMA lens(optional)

MOUNTING

Aluminum / GI Pole

I/P VOLTAGE

230V AC, 50/60Hz

RATED POWER

60/70 W

LUMEN FLUX

7200-6000 Lm

COLOR

W/WW / NW

IP RATING

IP 65/67

DIMENSION

L-500 X W-280 X H-90mm

POLE

6Mtrs

APPLICATION

Streets / Roads, Pathway, Garden, Stadium, HiMast

Rs.5,750/-

iLED 60 ST 05



MATERIAL

Ventilated Aluminum extrusion with aluminum casting, Reflector PMMA lens (optional)

MOUNTING

Aluminum / GI Pole

I/P VOLTAGE

230V AC, 50/60Hz

RATED POWER

60/70 W

LUMEN FLUX

7200-6000 Lm

COLOR

W/WW / NW

IP RATING

IP 65/67

DIMENSION

L-500 X W-280 X H-90mm

POLE


6Mtrs

APPLICATION

Streets / Roads, Pathway, Garden, Stadium, HiMast

Rs.7,500/-

iLED 80 ST 06

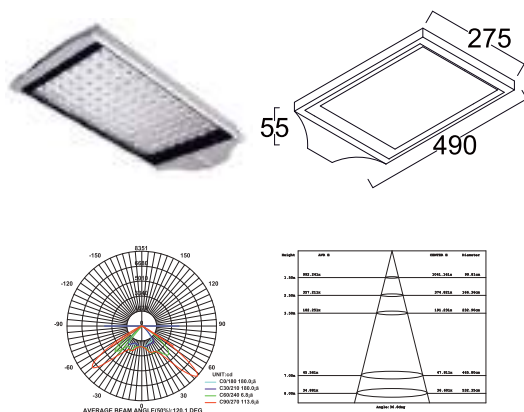

MATERIAL

Ventilated Aluminum extrusion with aluminum casting, Reflector PMMA lens (optional)

MOUNTING

Aluminum / GI Pole

I/P VOLTAGE

230VAC, 50/60Hz

RATED POWER

80W

LUMEN FLUX

9600-8000 Lm

COLOR

W/WW / NW

IP RATING

IP 65/67

DIMENSION

L -490 X W -275 X H- 55 mm



POLE

7.5Mtrs

APPLICATION

Streets / Roads, Pathway, Garden, Stadium, HiMast

Rs.9,000/-

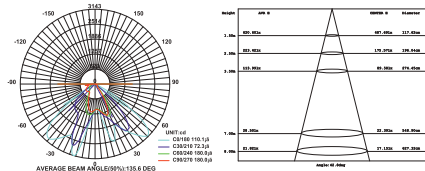

iLED 36 ST 1711

MATERIAL

Ventilated Powder Coated Aluminium
with Wide aero angle Lens

MOUNTING

Aluminum / GI Pole

I/P VOLTAGE

230V AC, 50/60Hz

RATED POWER

36W

LUMEN FLUX

4320-3600W Lm

COLOR

W/WW / NW

DIMENSION

L-200 X W-253 X H-50 mm



APPLICATION

Streets / Roads, Pathway, Garden, Stadium, HiMast

ANGLE

80°/145°

Rs.2,500/-

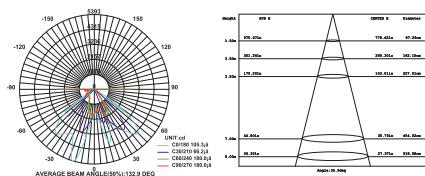

iLED 72 ST 1712

MATERIAL

Ventilated Powder Coated Aluminium
with Wide aero angle Lens

MOUNTING

Aluminum / GI Pole

I/P VOLTAGE

230V AC, 50/60Hz

RATED POWER

72W

LUMEN FLUX

8640-7200W Lm

COLOR

W/WW / NW

DIMENSION

L -400 X W -253 X H- 50 mm



APPLICATION

Streets / Roads, Pathway, Garden, Stadium, HiMast

ANGLE

80°/145°

Rs.4,750/-

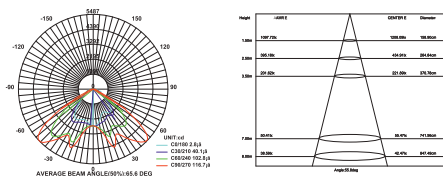

iLED 108 ST 1713

MATERIAL

Ventilated Powder Coated Aluminium
with Wide aero angle Lens

MOUNTING

Pole

I/P VOLTAGE

230V AC, 50/60Hz

RATED POWER

108w

LUMEN FLUX

12960-10800 Lm

COLOR

W/WW / NW

DIMENSION

L-530 X W-253 X H-50 mm



APPLICATION

Streets / Roads, Pathway, Garden, Stadium, HiMast

ANGLE

80°/145°

Rs.7,250/-

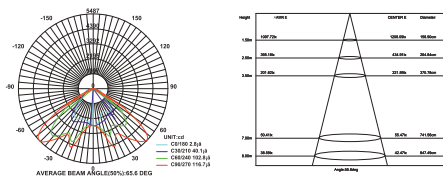

iLED 144 ST 1714

MATERIAL

Ventilated Powder Coated Aluminium
with Wide aero angle Lens

MOUNTING

Pole

I/P VOLTAGE

230V AC, 50/60Hz

RATED POWER

144w

LUMEN FLUX

17280-14400W Lm

COLOR

W/WW / NW

DIMENSION

L-680 X W-253 X H-50 mm

APPLICATION

Streets / Roads, Pathway, Garden, Stadium, HiMast

ANGLE

80°/145°

Rs.10,000/-



iLED 6 STL 2835/60

MATERIAL	Flexible Copper pcb with Silicon casing
LIGHT SOURCE	2835 LED's
I/P VOLTAGE	12 / 24 V
RATED POWER	6 W
COLOR	W/ WW/ R/G/ B/ W+WW Other Colors on request
IP RATING	IP 33/67/68
WIDTH OF THE PCB	8 mm
APPLICATION	Signage, Interior/Exterior lighting, Accent lighting, Under cabinet lighting, landscape lighting, Back lighting.

IP 33 : Rs. 325

**Single Color : IP 67 : Rs. 350
& RGB IP 68 : Rs. 600**



iLED 12 STL 2835/120 -

MATERIAL	Flexible Copper pcb with Silicon casing
LIGHT SOURCE	2835 LED's
I/P VOLTAGE	12 / 24 V
RATED POWER	12 W
COLOR	W/ WW/ R/G/ B/ W+WW Other Colors on request
IP RATING	IP 33/67/68
WIDTH OF THE PCB	8-10 mm
APPLICATION	Signage, Interior/Exterior lighting, Accent lighting, Under cabinet lighting, landscape lighting, Back lighting.

IP 33 : Rs. 450

**Single Color : IP 67 : Rs. 475
& RGB IP 68 : Rs. 775**



iLED 16 STL 2835 / 120 OR iLED 5050 / 60

MATERIAL	Flexible Copper pcb with Silicon casing
LIGHT SOURCE	2835 LED's / 5050 LED's
I/P VOLTAGE	12 / 24 V
RATED POWER	16 W
COLOR	W/ WW/ R/G/ B/ WW +WW/ Other Colors on request
IP RATING	IP 33/67/68
WIDTH OF THE PCB	5-8 mm
APPLICATION	Signage, Interior/Exterior lighting, Accent lighting, Under cabinet lighting, landscape lighting, Back lighting

IP 33 : Rs. 475

**Single Color : IP 67 : Rs. 550
& RGB IP 68 : Rs. 800**



iLED 20 STL 2835/168 -

MATERIAL	Flexible Copper pcb with Silicon casing
LIGHT SOURCE	3528 LEDS
I/P VOLTAGE	12 / 24 V
RATED POWER	20 W
COLOR	W/ WW/ R/G/ B/ W+WW Other Colors on request
IP RATING	IP 33/67/68
WIDTH OF THE PCB	10 mm
APPLICATION	Signage, Interior/Exterior lighting, Accent lighting, Under cabinet lighting, landscape lighting, Back lighting.

IP 33 : Rs. 675

**Single Color : IP 67 : Rs. 750
& RGB IP 68 : Rs. 1,000**



iLED 24 STL 2835/240 -

MATERIAL	Flexible Copper pcb with Silicon casing
LIGHT SOURCE	2835 LEDS
I/P VOLTAGE	12 / 24 V
RATED POWER	24 W
COLOR	W/ WW/ R/G/ B/ W+WW Other Colors on request
IP RATING	IP 33/67/68
WIDTH OF THE PCB	10 mm
APPLICATION	Signage, Interior/Exterior lighting, Accent lighting, Under cabinet lighting, landscape lighting, Back lighting.

IP 33 : Rs. 800

**Single Color : IP 67 : Rs. 950
& RGB IP 68 : Rs. 1,150**







iLED 44 STL 2835/360

MATERIAL	Flexible Copper pcb with Silicon casing
LIGHT SOURCE	2835 LED's
I/P VOLTAGE	12 / 24 V
RATED POWER	44 W
COLOR	W / WW / NW Other Colors on request
IP RATING	IP 33/67/68
WIDTH OF THE PCB	30mm
APPLICATION	Signage, Interior/Exterior lighting, Accent lighting, Under cabinet lighting, landscape lighting, Back lighting.

IP 33 : Rs. 1,500

**Single Color : IP 67 : Rs. 1,700
& RGB IP 68 : Rs. 2,300**






iLED 3 SM RDL 01

MATERIAL	Brushed Aluminum with PMMA lens
MOUNTING	Surface Mount
I/P VOLTAGE	230V AC, 50/60Hz
RATED POWER	3W
LUMEN FLUX	120 - 100 Lm
COLOR	W/ WW / NW
DIMENSION	D-40 x H-40mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters

Brushed Aluminum with PMMA lens
Surface Mount
230V AC, 50/60Hz
3W
120 - 100 Lm
W/ WW / NW
D-40 x H-40mm
Hotel, Show room, Home, Office, Auditorium, Theaters

Rs.550/-






iLED 6 SM RDL 02 -3928

MATERIAL	Ventilated Aluminum Cooling with Reflector & Tempered glass
MOUNTING	SurfaceMount
I/P VOLTAGE	230V AC, 50/60Hz
RATED POWER	6W
LUMEN FLUX	720-600 Lm
COLOR	W/ WW / NW
DIMENSION	D - 65 X H-100 mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters

Ventilated Aluminum Cooling with Reflector & Tempered glass
SurfaceMount
230V AC, 50/60Hz
6W
720-600 Lm
W/ WW / NW
D - 65 X H-100 mm
Hotel, Show room, Home, Office, Auditorium, Theaters

Rs.1,350/-






iLED 10 SM RDL 03 - 3931

MATERIAL	Ventilated Aluminum Cooling with Reflector & Tempered glass
MOUNTING	Surface Mount
I/P VOLTAGE	230V AC, 50/60Hz
RATED POWER	10W
LUMEN FLUX	1200-1000 Lm
COLOR	W/ WW / NW
DIMENSION	D - 90 X H-120 mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters

Ventilated Aluminum Cooling with Reflector & Tempered glass
Surface Mount
230V AC, 50/60Hz
10W
1200-1000 Lm
W/ WW / NW
D - 90 X H-120 mm
Hotel, Show room, Home, Office, Auditorium, Theaters

Rs.1,800/-




iLED 15 SM RDL 04 - 3935

MATERIAL	Ventilated Aluminum Cooling with Reflector & Tempered glass
MOUNTING	Surface Mount
I/P VOLTAGE	230V AC, 50/60Hz
RATED POWER	15W
LUMEN FLUX	1800-1500 Lm
COLOR	W/ WW / NW
DIMENSION	D - 110 X H-200 mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters

Ventilated Aluminum Cooling with Reflector & Tempered glass
Surface Mount
230V AC, 50/60Hz
15W
1800-1500 Lm
W/ WW / NW
D - 110 X H-200 mm
Hotel, Show room, Home, Office, Auditorium, Theaters

Rs.1,950/-

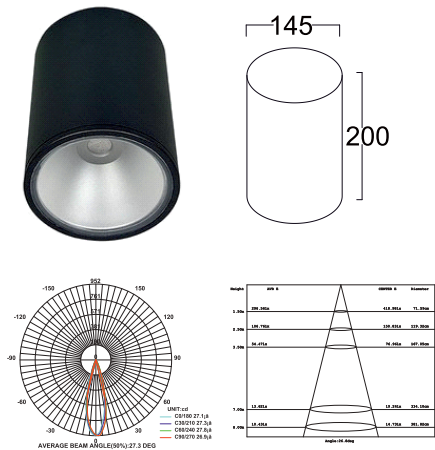

iLED 20 SM RDL 05 - 3936

MATERIAL

Ventilated Aluminum Cooling with Reflector & Tempered glass

MOUNTING

Surface Mount

I/P VOLTAGE

230V AC, 50/60Hz

RATED POWER

20W

LUMEN FLUX

2400-2000 Lm

COLOR

W/ WW / NW


DIMENSION

D - 145 X H-200 mm

APPLICATION

Hotel, Show room, Home, Office, Auditorium, Theaters

Rs.2,700/-

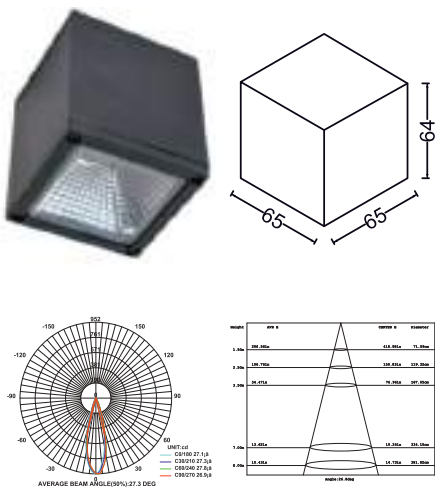

iLED 6 SM SDL 06 - 3955

MATERIAL

Ventilated Aluminum Cooling with Reflector & Tempered glass

MOUNTING

Surface Mount

I/P VOLTAGE

230V AC, 50/60Hz

RATED POWER

6 W

LUMEN FLUX

720-600 Lm

COLOR

W/ WW / NW


DIMENSION

L - 65 X W - 65 X H- 64 mm

APPLICATION

Hotel, Show room, Home, Office, Auditorium, Theaters

Rs.1,450/-

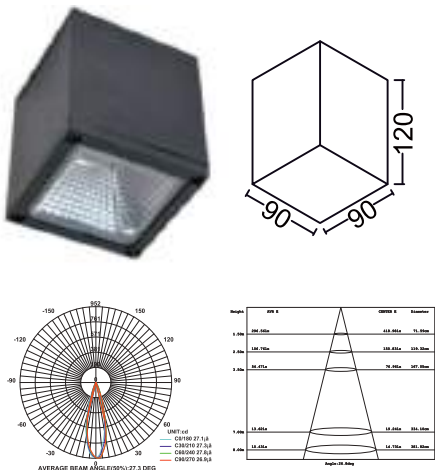

iLED 10 SM SDL 07-3956

MATERIAL

Ventilated Aluminum Cooling with Reflector & Tempered glass

MOUNTING

Surface Mount

I/P VOLTAGE

230V AC, 50/60Hz

RATED POWER

10 W

LUMEN FLUX

1200-1000 Lm

COLOR

W/ WW / NW


DIMENSION

L - 90 X W - 90 X H- 120 mm

APPLICATION

Hotel, Show room, Home, Office, Auditorium, Theaters

Rs.1,800/-

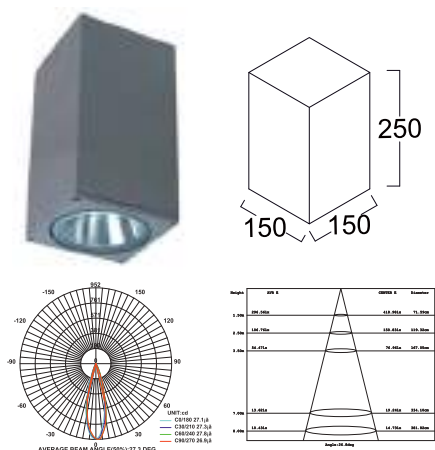

iLED 20 SM SDL 08-3956-1

MATERIAL

Ventilated Aluminum Cooling with Reflector & Tempered glass

MOUNTING

Surface Mount

I/P VOLTAGE

230V AC, 50/60Hz

RATED POWER

20W

LUMEN FLUX

2400-2000 Lm

COLOR

W/ WW / NW

DIMENSION




L - 150 X W - 150 X H- 250 mm

APPLICATION

Hotel, Show room, Home, Office, Auditorium, Theaters

Rs.2,750/-

iLED 8 SM RDL 09



MATERIAL

Ventilated Aluminum Die cast with high transitive milky diffuser

MOUNTING

Surface Mount

I/P VOLTAGE

230V AC, 50/60Hz

RATED POWER

8 W

LUMEN FLUX

960-800 Lm

COLOR

W/ WW / NW

DIMENSION




D - 90 X H- 55 mm

APPLICATION

Hotel, Show room, Home, Office, Auditorium, Theaters

Rs.950/-

iLED 8 SM SDL 10



MATERIAL

Ventilated Aluminum Die cast with high transitive milky diffuser

MOUNTING

Surface Mount

I/P VOLTAGE

230V AC, 50/60Hz

RATED POWER

8 W

LUMEN FLUX

960-800 Lm

COLOR

W/ WW / NW

DIMENSION




L - 90 X W - 90 X H- 55 mm

APPLICATION

Hotel, Show room, Home, Office, Auditorium, Theaters

Rs.950/-

iLED 20 SM RDL 11



MATERIAL

Ventilated Aluminum Die cast with high transitive milky diffuser

MOUNTING

Surface Mount

I/P VOLTAGE

230V AC, 50/60Hz

RATED POWER

20 W

LUMEN FLUX

2400-2000 Lm

COLOR

W/ WW / NW

DIMENSION




D - 180 X H- 55 mm

APPLICATION

Hotel, Show room, Home, Office, Auditorium, Theaters

Rs.1,950/-

iLED 20 SM SDL 12



MATERIAL

Ventilated Aluminum Die cast with high transitive milky diffuser

MOUNTING

Surface Mount

I/P VOLTAGE

230V AC, 50/60Hz

RATED POWER

20 W

LUMEN FLUX

2400-2000 Lm

COLOR

W/ WW / NW

DIMENSION


L - 180 X W - 180 X H- 55 mm

APPLICATION

Hotel, Show room, Home, Office, Auditorium, Theaters

Rs.1,950/-

iLED 27 SM RDL 13

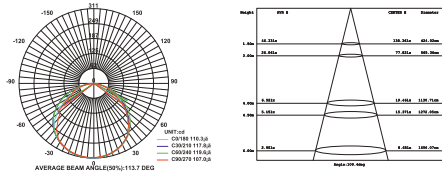

MATERIAL

Ventilated Aluminum Die cast with high transitive milky diffuser

MOUNTING

Surface Mount

I/P VOLTAGE

230V AC, 50/60Hz

RATED POWER

27 W

LUMEN FLUX

3240-2700 Lm

COLOR

W/ WW / NW

DIMENSION



D - 220 X H- 55 mm

APPLICATION

Hotel, Show room, Home, Office, Auditorium, Theaters

Rs.2,900/-

iLED 27 SM SDL 14

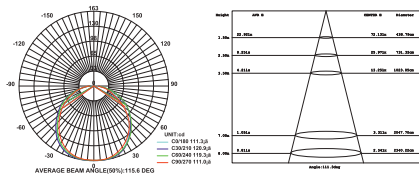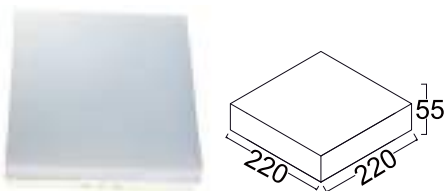

MATERIAL

Ventilated Aluminum Die cast with high transitive milky diffuser

MOUNTING

Surface Mount

I/P VOLTAGE

230V AC, 50/60Hz

RATED POWER

27 W

LUMEN FLUX

3240-2700 Lm

COLOR

W/ WW / NW

DIMENSION



L - 220 X W - 220 X H- 55 mm

APPLICATION

Hotel, Show room, Home, Office, Auditorium, Theaters

Rs.2,900/-

iLED 12 SM RDL 15 ECO

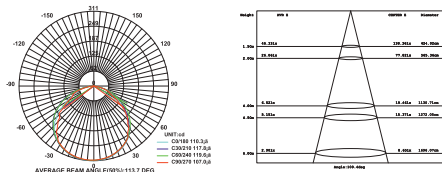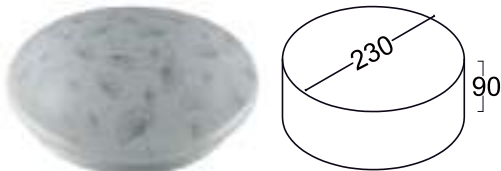

MATERIAL

Sheet metal with PMMA high transitive with milky diffuser

MOUNTING

Recess/Surface Mount

I/P VOLTAGE

230V AC, 50/60Hz

RATED POWER

12W

LUMEN FLUX

1200-960 Lm

COLOR

W/ WW / NW

DIMENSION


D-230 X H-90mm

APPLICATION

Commercial Office, Showrooms, Parking, Corridors, Industries, etc.,

Rs.1,190/-

iLED 18 SM RDL 16 ECO

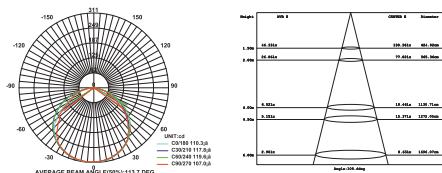

MATERIAL

Sheet metal with PMMA high transitive with milky diffuser

MOUNTING

Recess/Surface Mount

I/P VOLTAGE

230V AC, 50/60Hz

RATED POWER

18W

LUMEN FLUX

1800-1440 Lm

COLOR

W/ WW / NW

DIMENSION


D-300 X H-100mm

APPLICATION

Commercial Office, Showrooms, Parking, Corridors, Industries, etc.,

Rs.1,350/-

iLED 7/12/15 SM RDL 17

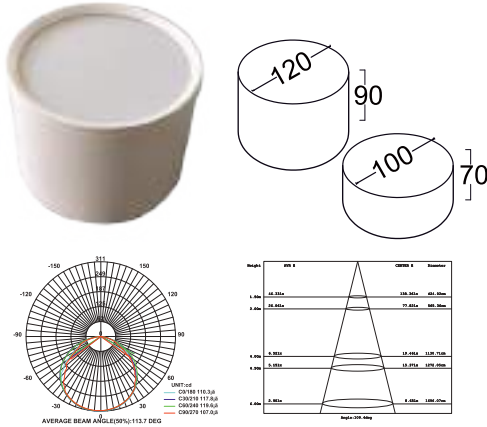

MATERIAL

Ventilated Aluminum Die cast with high transitive milky diffuser

MOUNTING

Surface Mount

I/P VOLTAGE

230V AC, 50/60Hz

RATED POWER

7/12/15 W

LUMEN FLUX

1440-1200 Lm

COLOR

W/ WW / NW

DIMENSION

D - 120 X H- 90 mm - 15W

DIMENSION


D - 100 X H- 70 mm - 12W / D - 75 X H- 60mm - 7W

APPLICATION

Hotel, Show room, Home, Office, Auditorium, Theaters

Rs.1,500/-

iLED 12 SM SDL 18

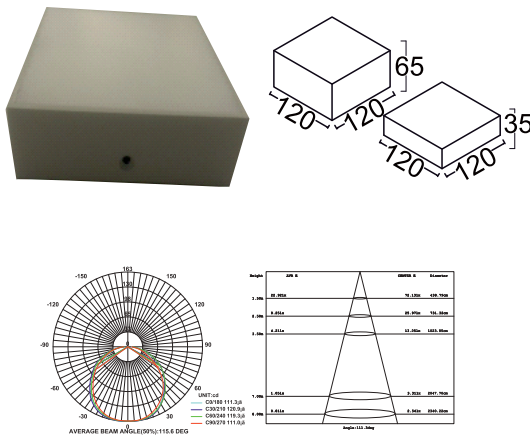

MATERIAL

Ventilated Aluminum Die cast with high transitive milky diffuser

MOUNTING

Surface Mount

I/P VOLTAGE

230V AC, 50/60Hz

RATED POWER

12 W

LUMEN FLUX

1440-1200 Lm

COLOR

W/ WW / NW

DIMENSION

L - 120 X W - 120 X H- 65 mm

DIMENSION


L - 120 X W - 120 X H- 37 mm

APPLICATION

Hotel, Show room, Home, Office, Auditorium, Theaters

Rs.1,500/-

iLED SMDL D17 19

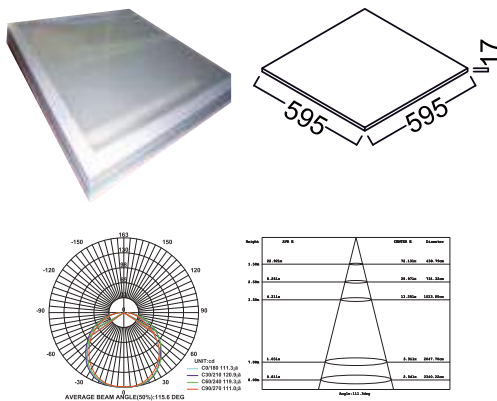

MATERIAL

Sheet metal with PMMA high transitive with milky diffuser

MOUNTING

Surface Mount

I/P VOLTAGE

230V AC, 50/60Hz

RATED POWER

40/60/120W

LUMEN FLUX

~120 Lm per Watt

COLOR

W/ WW/ NW

DIMENSION

L-595 X W-595 X H-17 mm

DIMENSION BOX


L-610 X W-610 X H-30 mm

APPLICATION

Commercial Office, Showrooms, Parking, Corridors, Industries, etc.

Rs.4,500 / 6,500 / 9,500/-

iLED SMDL D35 20

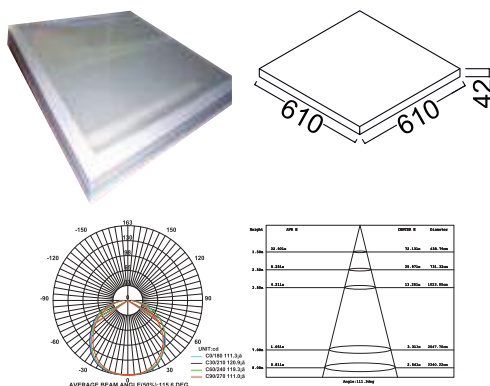

MATERIAL

Sheet metal with PMMA high transitive with milky diffuser

MOUNTING

Surface Mount

I/P VOLTAGE

230V AC, 50/60Hz

RATED POWER

40/60/120W

LUMEN FLUX

~120 Lm per Watt

COLOR

W/ WW/ NW

DIMENSION

L-595 X W-595 X H-35 mm

DIMENSION BOX




L-610 X W-610 X H-42 mm

APPLICATION

Commercial Office, Showrooms, Parking, Corridors, Industries, etc.,

Rs.4,500 / 6,500 / 9,500/-

iLED 120 SMDL D70 21



MATERIAL

Sheet metal with PMMA high transitive with milky diffuser

MOUNTING

Surface Mount MS with Aluminum PCB

I/P VOLTAGE

230V AC, 50/60Hz

RATED POWER

120W

LUMEN FLUX

14400-10800 Lm

COLOR

W/ WW / NW

DIMENSION

L-545 X W-545X H-70mm



DIMENSION BOX

L-580 X W-565 X H-100 mm Each

APPLICATION

Commercial Office, Showrooms, Parking, Corridors, Industries, etc.,

Rs.10,500/-

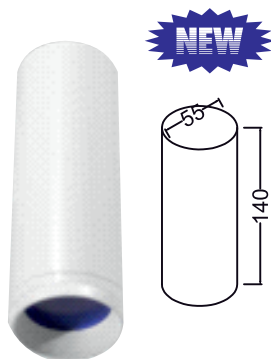

iLED 10 SM RDL 22 - FR SERIES LUXPRO®

MATERIAL

Ventilated Aluminum Cooling with Reflector OR Lens

MOUNTING

Surface Mount / Suspended

I/P VOLTAGE

230V AC, 50/60Hz

RATED POWER

10W

LUMEN FLUX

1200-1000 Lm

COLOR

W/ WW / NW


DIMENSION

D - 55 X H-140 mm

APPLICATION

Hotel, Show room, Home, Office, Auditorium, Theaters

Rs.2,675/-

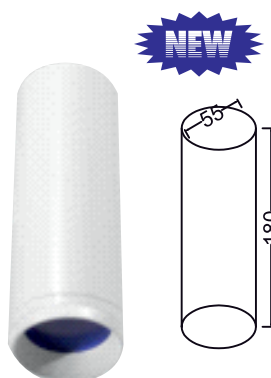

iLED 15 SM RDL GP-M-5518-Q 23- FR SERIES LUXPRO®

MATERIAL

Ventilated Aluminum Cooling with Reflector OR Lens

MOUNTING

Surface Mount / Suspended

I/P VOLTAGE

230V AC, 50/60Hz

RATED POWER

15W

LUMEN FLUX

1800-1500 Lm

COLOR

W/ WW / NW

DIMENSION


D - 55 X H-180 mm

APPLICATION

Hotel, Show room, Home, Office, Auditorium, Theaters

Rs.2,975/-

Locking Rings - Q2



MATERIAL

Plastic Ring

MOUNTING

Locking Type

RING COLOR

White


Half-White

Black


DIMENSION

D-55 X H-43mm


Rs.125/-



MATERIAL	Stainless Steel, tough glass or diffuser
MOUNTING	Surface / Recess mount inside water body.
I/P VOLTAGE	12V/24V-AC OR DC
RATED POWER	1 W
LUMEN FLUX	120- 100 Lm
COLOR	W/WW/G/R/B/RGB
IP RATING	IP 68
DIMENSION	D-42 X H-90 mm
DRIVER TYPE	Internal Driver
APPLICATION	Swimming Pool / Fountain Lights
ANGLE	5°, 10°, 25°, 30°, 45°






MATERIAL	Stainless Steel, tough glass or diffuser
MOUNTING	Surface / Recess mount inside water body.
I/P VOLTAGE	12V/24V-AC OR DC
RATED POWER	1 W
LUMEN FLUX	120- 100 Lm
COLOR	W/WW/G/R/B/RGB
IP RATING	IP 68
DIMENSION	D- 44 X H-50 mm
DRIVER TYPE	Internal Driver
APPLICATION	Swimming Pool / Fountain Lights
ANGLE	5°, 10°, 25°, 30°, 45°



MATERIAL	Stainless steel (SS316)
MOUNTING	Surface / Recess mount inside water body.
I/P VOLTAGE	12V/24V-AC OR DC
RATED POWER	3W
LUMEN FLUX	360-300 Lm
COLOR	W/WW/G/R/B/RGB
IP RATING	IP 68
DIMENSION	D-67 X H- 85mm
DRIVER TYPE	Internal Driver
APPLICATION	Swimming Pool / Fountain Lights
ANGLE	5°, 10°, 25°, 30°, 45°



Rs.5,500/-



iLED 3 SWP 04

MATERIAL	Stainless steel (SS316)
MOUNTING	Surface / Recess mount inside water body.
I/P VOLTAGE	12V/24V-AC OR DC
RATED POWER	3W
LUMEN FLUX	360-300 Lm
COLOR	W/WW/G/R/B/RGB
IP RATING	IP 68
DIMENSION	D-67 X H- 87mm
DRIVER TYPE	Internal Driver
APPLICATION	Swimming Pool / Fountain Lights
ANGLE	5°, 10°, 25°, 30°, 45°



Rs.4,900/-



iLED 9 SWP 05

MATERIAL	Stainless steel (SS316)
MOUNTING	Surface / Recess mount inside water body.
I/P VOLTAGE	12V/24V-AC OR DC
RATED POWER	9W
LUMEN FLUX	1080-900 Lm
COLOR	W/WW/G/R/B/RGB
IP RATING	IP 68
DIMENSION	D-165 X H- 102 mm
DRIVER TYPE	Internal Driver
APPLICATION	Swimming Pool / Fountain Lights
ANGLE	5°, 10°, 25°, 30°, 45°




Rs.9,500/-



iLED 18 SWP 06

MATERIAL	Stainless steel (SS316)
MOUNTING	Surface / Recess mount inside water body.
I/P VOLTAGE	12V/24V-AC OR DC
RATED POWER	18W
LUMEN FLUX	2160-1800 Lm
COLOR	W/WW/G/R/B/RGB
IP RATING	IP 68
DIMENSION	D-165 X H- 102mm
DRIVER TYPE	External Driver
APPLICATION	Swimming Pool / Fountain Lights
ANGLE	5°, 10°, 25°, 30°, 45°




Rs.14,500/-



iLED 6 SWP 07

MATERIAL	Stainless steel (SS316)
MOUNTING	Surface / Recess mount inside water body.
I/P VOLTAGE	12V/24V-AC OR DC
RATED POWER	6W
LUMEN FLUX	720-600 Lm
COLOR	W/WW/G/R/B/RGB
IP RATING	IP 68
DIMENSION	D -120 X H- 110 mm
DRIVER TYPE	Internal Driver
APPLICATION	Swimming Pool / Fountain Lights
ANGLE	5°, 10°, 25°, 30°, 45°




Rs.7,500/-



iLED 12 SWP 08

MATERIAL	Stainless steel (SS316)
MOUNTING	Surface / Recess mount inside water body.
I/P VOLTAGE	12V/24V-AC OR DC
RATED POWER	12W
LUMEN FLUX	1440-1200Lm
COLOR	W/WW/G/R/B/RGB
IP RATING	IP 68
DIMENSION	D -120 X H- 110 mm
DRIVER TYPE	Internal Driver
APPLICATION	Swimming Pool / Fountain Lights
ANGLE	5°, 10°, 25°, 30°, 45°




Rs.9,500/-



iLED 10 SWP 09

MATERIAL	ABS Plastic with Toughened frosted Glass
MOUNTING	Surface / Recess mount inside water body.
I/P VOLTAGE	12V/24V-AC OR DC
RATED POWER	10W
LUMEN FLUX	1200-1000Lm
COLOR	W/WW/G/R/B/RGB
IP RATING	IP 68
DIMENSION	D -120 X H- 25 mm
DRIVER TYPE	Internal Driver
APPLICATION	Swimming Pool / Fountain Lights
ANGLE	5°, 10°, 25°, 30°, 45°




Rs.9,500/-



iLED 12/24 SWP 10

MATERIAL	ABS Plastic with Toughened frosted Glass
MOUNTING	Surface / Recess mount inside water body.
I/P VOLTAGE	12V/24V-AC OR DC
RATED POWER	12/24W
LUMEN FLUX	2880-2400Lm
COLOR	W/WW/G/R/B/RGB
IP RATING	IP 68
DIMENSION	D -290 X H- 65 mm
DRIVER TYPE	Internal Driver
APPLICATION	Swimming Pool / Fountain Lights
ANGLE	5°, 10°, 25°, 30°, 45°




Rs.10,000/- / Rs.12,500/-



iLED 24 SWP 11

MATERIAL	Stainless steel (SS304, SS316 optional)
MOUNTING	Surface / Recess mount inside water body.
I/P VOLTAGE	12V/24V-AC OR DC
RATED POWER	24W
LUMEN FLUX	2880-2400Lm
COLOR	W/WW/G/R/B/RGB
IP RATING	IP 68
DIMENSION	D -180 X H- 85 mm
DRIVER TYPE	Internal Driver
APPLICATION	Swimming Pool / Fountain Lights
ANGLE	5°, 10°, 25°, 30°, 45°

Rs.16,750/-



iLED 40/65 SWP 12 LUXPRO®

MATERIAL	Die Cast Aluminum / Stainless Steel, tough glass diffuser
MOUNTING	Surface / Recess mount inside water body.
I/P VOLTAGE	12V/24V-AC OR DC
RATED POWER	40/65W
LUMEN FLUX	7800 - 6500 Lm
COLOR	W/WW/G/R/B/RGB
IP RATING	IP 68
DIMENSION	D -270 X H-125mm
DRIVER TYPE	Internal Driver
APPLICATION	Swimming Pool / Fountain Lights
ANGLE	5°, 10°, 25°, 30°, 45°

Rs.45,000/- / Rs.65,000/-



iLED 8082 Table Top/8062 Table CLIP Lamp 01

MATERIAL	Natural anodized aluminum + metal color gray tiltable and 360 degree rotatable on lamp holder with incorporated on/off switch.
MOUNTING	Table Top/table Clip
FINISH	Brushed Nickel
IP VOLTAGE	230V AC, 50/60Hz
LIGHT SOURCE	LED Bulbs
SWITCH TYPE	Knob Switch
BULB BASE TYPE	E27
APPLICATION	Reading Lamp

Rs.2,550/-



iLED Wall Mount LED Lamp 02

MATERIAL	Natural anodized aluminum +metal color gray tiltable and 360 degree rotatable on lamp holder with incorporated on/off switch.
MOUNTING	Wall Mount
FINISH	Brushed Nickel
IP VOLTAGE	230V AC, 50/60Hz
LIGHT SOURCE	LED Bulbs
SWITCH TYPE	Knob Switch
BULB BASE TYPE	E27
APPLICATION	Reading Lamp

Rs.1,900/-



iLED UE 001 LED Desk Lamp 03

MATERIAL	Aluminum Alloy withToughened GLASS
MOUNTING	Desk Top
I/P VOLTAGE	230V AC, 50/60Hz
POWER SUPPLY	USB power supply, adapter
COLOR	black, white(other customizable)
PACKING SIZE	L-315 X W-160 X H-50 mm
WATTS	5W
APPLICATION	Reading Lamp

Rs.1,350/-




iLED UE 009 LED Desk Lamp 04

TYPE	Built-in battery back up (Rechargeable)
MATERIAL	Aluminum Alloy with Toughened Glass.
MOUNTING	Desk Top
I/P VOLTAGE	230V AC, 50/60Hz
POWER SUPPLY	USB power supply, adapter
COLOR	black, white (other customizable)
PACKING SIZE	L-315 X W-160 X H-50 mm
WATTS	5W
APPLICATION	Reading Lamp

Rs.2,550/-

iLED 10 TRL COB 01

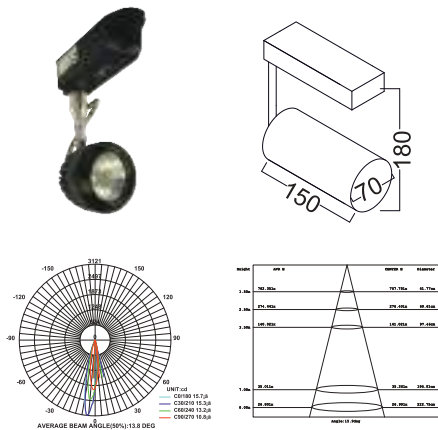

MATERIAL

Powder coated Aluminum with toughened Glass with reflector

MOUNTING

Ceiling Mount Track

I/P VOLTAGE

230VAC, 50/60Hz

RATED POWER

10 W

LUMEN FLUX

1200-1000Lm

COLOR

W/ WW/ NW

DIMENSION

L-150 X W-70 X H-180 mm

APPLICATION


Hotels, Apartments, Textile & Jewellerys Etc.,

ANGLE

5°, 10°, 25°, 30°, 45°

Rs.1,250/-

iLED 12 TRL COB 02

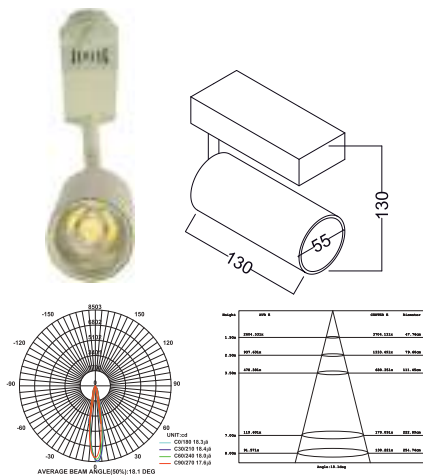

MATERIAL

Powder coated Aluminum with reflector & lens

MOUNTING

Ceiling Mount Track

I/P VOLTAGE

230V AC, 50/60Hz

RATED POWER

12 W

LUMEN FLUX

1200-1000Lm

COLOR

W/ WW/ NW

DIMENSION

L-130 X W-55 X H-130 mm

APPLICATION


Hotels, Apartments, Textile & Jewellerys Etc.,

ANGLE

5°, 10°, 25°, 30°, 45°

Rs.1,350/-

iLED 12 TRL COB 03

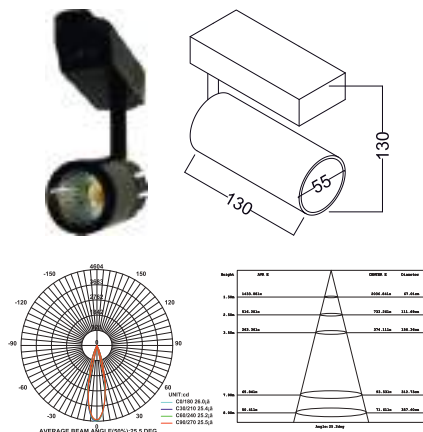

MATERIAL

Powder coated Aluminum with toughened Glass with reflector

MOUNTING

Ceiling Mount Track

I/P VOLTAGE

230V AC, 50/60Hz

RATED POWER

12W

LUMEN FLUX

1440-1200 Lm

COLOR

W/ WW/ NW

DIMENSION

L-130 X W-55 X H-130 mm

APPLICATION


Hotels, Apartments, Textile & Jewellerys Etc.,

ANGLE

5°, 10°, 25°, 30°, 45°

Rs.1,350/-

iLED 15 TRL COB 04

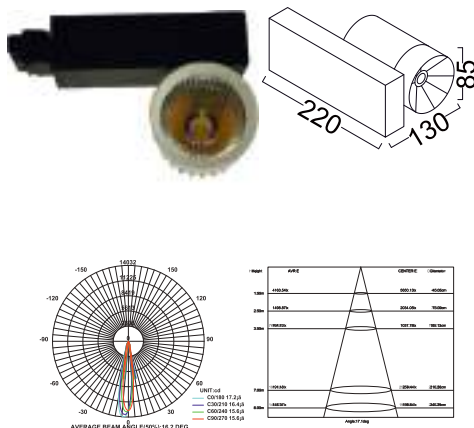

MATERIAL

Powder coated Aluminum with toughened Glass with reflector LENS

MOUNTING

Ceiling Mount Track

I/P VOLTAGE

230V AC, 50/60Hz

RATED POWER

15W

LUMEN FLUX

1800-1500Lm

COLOR

W/ WW/ NW

DIMENSION

L-130 X W-220 X H-85 mm













APPLICATION

Hotels, Apartments, Textile & Jewellerys Etc.,

ANGLE

5°, 10°, 25°, 30°, 45°

Rs.2,200/-



iLED 15+15 TRL COB 05

MATERIAL	Powder coated Aluminum with toughened Glass with reflector lens
MOUNTING	Ceiling Mount Track
I/P VOLTAGE	230V AC, 50/60Hz
RATED POWER	30W
LUMEN FLUX	3600-3000 Lm
COLOR	W/ WW/ NW
DIMENSION	L-250 X W-220 X H-97 mm
APPLICATION	Hotels, Apartments, Textile & Jewellerys Etc.,
ANGLE	5°, 10°, 25°, 30°, 45°

Rs.3,450/-

iLED 24 TRL COB 06

MATERIAL	Powder coated Aluminum with Lens & toughened Glass
MOUNTING	Ceiling Mount Track
I/P VOLTAGE	230V AC, 50/60Hz
RATED POWER	24W
LUMEN FLUX	3250- 2750Lm
COLOR	W/ WW/ NW
DIMENSION	L -220 X W- 110 X H- 265 mm
APPLICATION	Hotels, Apartments, Textile & Jewellerys Etc.,
ANGLE	5°, 10°, 25°, 30°, 45°

Rs.3,900/-

iLED 30 TRL COB 07

MATERIAL	Powder coated Aluminum with toughened Glass / honeycomb lens with reflector
MOUNTING	Ceiling Mount Track
I/P VOLTAGE	230V AC, 50/60Hz
RATED POWER	30W
LUMEN FLUX	3600- 3000Lm
COLOR	W/ WW/ NW
DIMENSION	L -195 X W- 146 X H- 205 mm
DIMENSION BOX	230 X 230 X 115 mm
APPLICATION	Hotels, Apartments, Textile & Jewellerys Etc.,
ANGLE	5°, 10°, 25°, 30°, 45°

Rs.3,450/-

iLED 8 TRL COB 08 LUXPRO®

MATERIAL	Powder coated Aluminum with toughened Glass / honeycomb lens with reflector
MOUNTING	Ceiling Mount Track
I/P VOLTAGE	230V AC, 50/60Hz
RATED POWER	8W
LUMEN FLUX	960- 800Lm
COLOR	W/ WW/ NW
DIMENSION	D- 40 X H- 90 mm
APPLICATION	Hotels, Apartments, Textile & Jewellerys Etc.,
ANGLE	5°, 10°, 25°, 30°, 45°


Rs.1,200/-



iLED 12 TRL COB 09 LUXPRO®

MATERIAL	Powder coated Aluminum with toughened Glass / honeycomb lens with reflector
MOUNTING	Ceiling Mount Track
I/P VOLTAGE	230V AC, 50/60Hz
RATED POWER	12W
LUMEN FLUX	1440- 1200Lm
COLOR	W/ WW/ NW
DIMENSION	D- 40 X H- 145 mm
APPLICATION	Hotels, Apartments Etc.,
ANGLE	5°, 10°, 25°, 30°, 45°

Rs.1,600/-

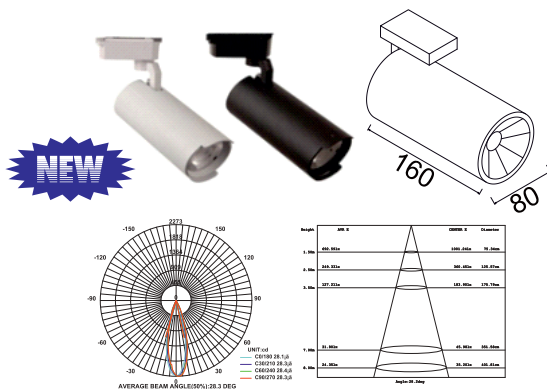

iLED 24 TRL COB 10 LUXPRO®

MATERIAL	Powder coated Aluminum with toughened Glass / honeycomb lens with reflector
MOUNTING	Ceiling Mount Track
I/P VOLTAGE	230V AC, 50/60Hz
RATED POWER	24W
LUMEN FLUX	2880- 2400Lm
COLOR	W/ WW/ NW
DIMENSION	D- 80 X H- 160 mm
APPLICATION	Hotels, Apartments Etc.,
ANGLE	5°, 10°, 25°, 30°, 45°


Rs.3,500/-



iLED 36 TRL COB 11 LUXPRO®

MATERIAL	Powder coated Aluminum with toughened Glass / honeycomb lens with reflector
MOUNTING	Ceiling Mount Track
I/P VOLTAGE	230V AC, 50/60Hz
RATED POWER	36W
LUMEN FLUX	4320- 3600Lm
COLOR	W/ WW/ NW
DIMENSION	D- 80 X H- 180 mm
APPLICATION	Hotels, Apartments Etc.,
ANGLE	5°, 10°, 25°, 30°, 45°


Rs.4,000/-

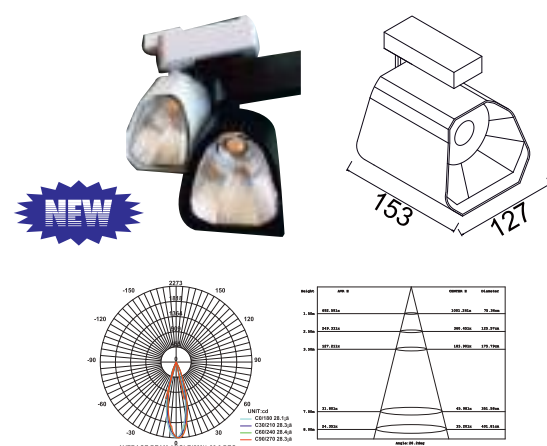

iLED 30 / 40 TRL COB 12 LUXPRO®

MATERIAL	Powder coated Aluminum with toughened Glass / honeycomb lens with reflector
MOUNTING	Ceiling Mount Track
I/P VOLTAGE	230V AC, 50/60Hz
RATED POWER	30/40W
LUMEN FLUX	3600- 3000Lm / 4800- 4000Lm
COLOR	W/ WW/ NW
DIMENSION	D- 127 X H- 153 mm
APPLICATION	Hotels, Apartments Etc.,
ANGLE	5°, 10°, 25°, 30°, 45°


Rs.5,650/- | Rs.6,200/-

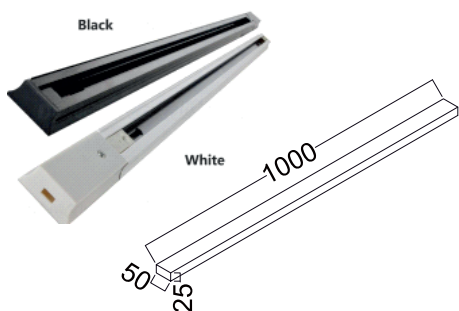

iLED 1M TRACK 01 3 Circuit 13

I/P VOLTAGE	N/A
RATED POWER	N/A
LUMEN FLUX	N/A
COLOR	N/A
DIMENSION	L-1000 X W-50 X H-25 mm


Rs.300/-

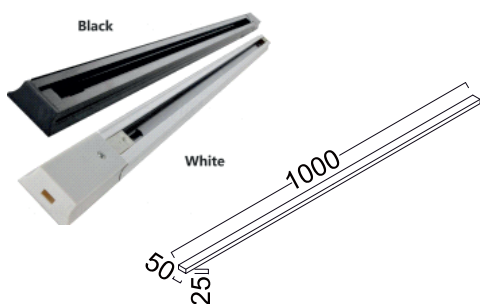

iLED 2M TRACK 02 3 Circuit 14

I/P VOLTAGE	N/A
RATED POWER	N/A
LUMEN FLUX	N/A
COLOR	N/A
DIMENSION	L-2000 X W-50 X H-25 mm

Rs.600/-

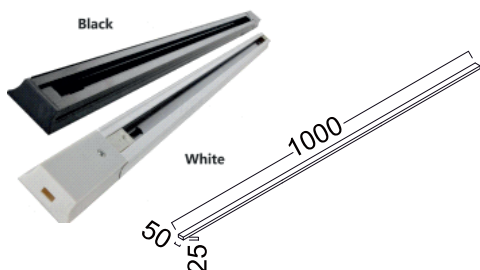

iLED 3M TRACK 02 3 Circuit 15

I/P VOLTAGE	N/A
RATED POWER	N/A
LUMEN FLUX	N/A
COLOR	N/A
DIMENSION	L -3000 X W -50 X H- 25 mm

Rs.800/-



iLED X-CONNECTOR 16

I/P VOLTAGE	N/A
RATED POWER	N/A
LUMEN FLUX	N/A
COLOR	WHITE / BLACK
DIMENSION	N/A

Rs.200/-



iLED I-CONNECTOR 17

I/P VOLTAGE	N/A
RATED POWER	N/A
LUMEN FLUX	N/A
COLOR	WHITE / BLACK
DIMENSION	N/A

Rs.100/-



iLED T-CONNECTOR 17

I/P VOLTAGE	N/A
RATED POWER	N/A
LUMEN FLUX	N/A
COLOR	WHITE / BLACK
DIMENSION	N/A


Rs.150/-



iLED L-CONNECTOR 18

I/P VOLTAGE	N/A
RATED POWER	N/A
LUMEN FLUX	N/A
COLOR	WHITE / BLACK
DIMENSION	N/A

Rs.100/-

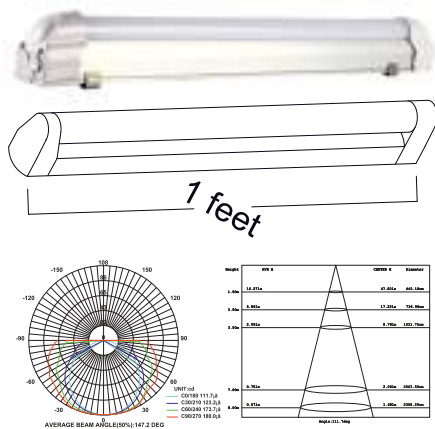

iLED 5 TL T5 01

MATERIAL

Aluminium Housing With PCB with polycarbonate Milky cover

MOUNTING

Batten Type

I/P VOLTAGE

230V AC, 50/60Hz

RATED POWER

5W

LUMEN FLUX

600-500 Lm

COLOR

W / WW / NW

DIMENSION

1 foot

DIMENSION BOX

L-310 X W-35 X H-25 mm

APPLICATION

Hotel, Show room, Home, Office, Auditorium

Rs.260/-

iLED 10 TL T5 02

MATERIAL

Aluminium Housing With PCB with polycarbonate Milky cover

MOUNTING

Batten Type

I/P VOLTAGE

230V AC, 50/60Hz

RATED POWER

10W

LUMEN FLUX

1200-1000 Lm

COLOR

W / WW / NW

DIMENSION

2 feet



DIMENSION BOX

L-615 X W-35 X H-25 mm

APPLICATION

Hotel, Show room, Home, Office, Auditorium

Rs.360/-

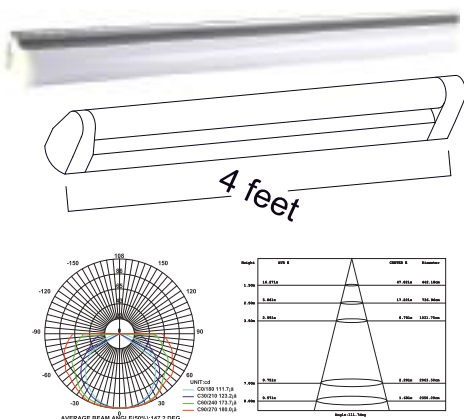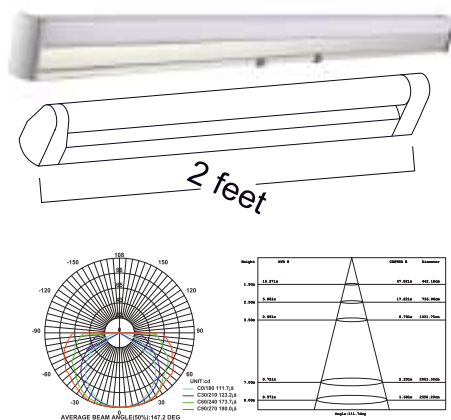

iLED 20 TL T5 03

MATERIAL

Aluminium Housing With PCB with polycarbonate Milky cover

MOUNTING

Batten Type

I/P VOLTAGE

230V AC, 50/60Hz

RATED POWER

20W

LUMEN FLUX

2400-2000 Lm

COLOR

W / WW / NW

DIMENSION

4 feet


DIMENSION BOX


L-1230 X W-40 X H-35 mm

APPLICATION

Hotel, Show room, Home, Office, Auditorium

Rs.475/-

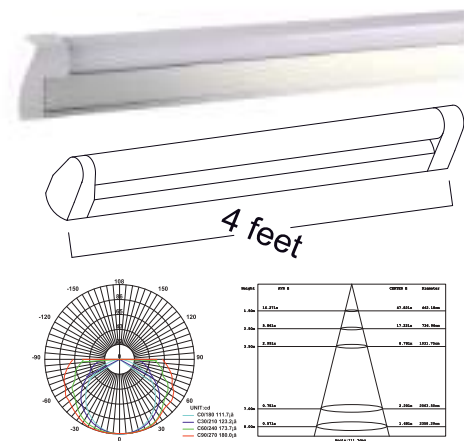

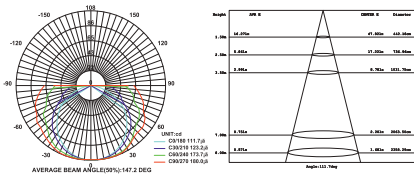

iLED 20 / 24 TL T8 05 - RETRO

MATERIAL

Aluminium Housing With PCB with polycarbonate Milky cover

MOUNTING

Batten Type

I/P VOLTAGE

230V AC, 50/60Hz

RATED POWER

20W

LUMEN FLUX

2400-2000 Lm

COLOR

W / WW / NW

DIMENSION

4 feet


DIMENSION BOX

L-1230 X W-40 X H-35 mm

APPLICATION

Hotel, Show room, Home, Office, Auditorium

Rs.625/-

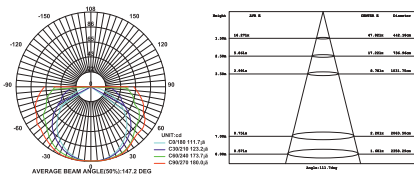

iLED 40 / 48 TL T8 06

MATERIAL

Aluminium Housing With PCB with polycarbonate Milky cover

MOUNTING

Batten Type

I/P VOLTAGE

230VAC, 50/60Hz

RATED POWER

40W

LUMEN FLUX

4800-4000 Lm

COLOR

W / WW / NW

DIMENSION

8 feet


DIMENSION BOX

L-2450 X W-40 X H-35 mm

APPLICATION

Hotel, Show room, Home, Office, Auditorium

Rs.1,450/-

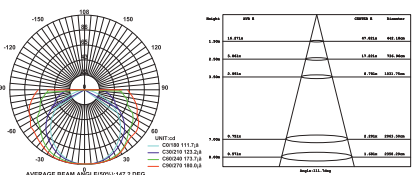

iLED 36/40 TL 07 - TRI PROOF IP67

MATERIAL

Aluminium Housing With PCB with polycarbonate Milky cover

MOUNTING

Batten Type

I/P VOLTAGE

85-265V AC, 50/60Hz

RATED POWER

36/40W

LUMEN FLUX

4800-4000 Lm

COLOR

W / WW / NW

DIMENSION

4 feet


DIMENSION BOX

L-2700 X W-50 X H-60 mm

APPLICATION

Hotel, Show room, Home, Office, Auditorium


Rs.2,750/-

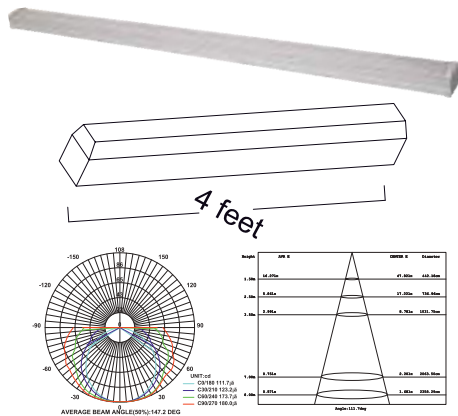

ILED 40 TL 08 - TRI PROOF IP67

MATERIAL	Aluminium Housing With PCB with polycarbonate Milky cover
MOUNTING	Batten Type
I/P VOLTAGE	230V AC, 50/60Hz
RATED POWER	40W
LUMEN FLUX	4800 - 4000 Lm
COLOR	W / WW / NW
DIMENSION	4 feet
DIMENSION BOX	L-1230 X W-40 X H-35 mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium

Rs.2750/-

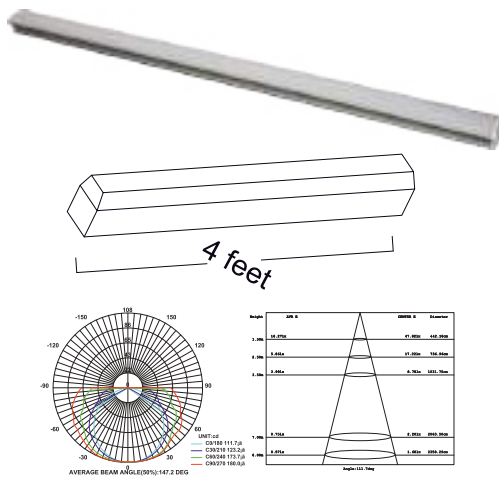

ILED 40 TL 09 - TRI PROOF IP67

MATERIAL	Aluminium Housing With PCB with polycarbonate Milky cover
MOUNTING	Batten Type
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	40W
LUMEN FLUX	4800-4000 Lm
COLOR	W / WW / NW
DIMENSION	4 feet
DIMENSION BOX	L-2450 X W-40 X H-35 mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium

Rs.2,750/-



iLED VIDEO ID PH 4 - 01

ASSEMBLY MODE	φ3.0 (module)
PIXEL PITCH	4 mm
PIXEL DENSITY (pixel/m ²)	62500
PIXEL CONFIGURATION	1R1YG
UNIT BOARD RESOLUTION	64 X 32
VIEWING DISTANCE (M)	≥4m
VIEWING ANGLE	≥140
VERTICAL AXIS	≥110
I/P VOLTAGE	230V AC, 50/60Hz
VIDEO SIGNAL / INPUT	RF,S-Video, RGB, RGBHV, YUV, YC, COMPOSITION
	Power Consumption
AVG/MAX (W/m ²)	1220
IP RATING	Indoor
DIMENSION	DIM : Optional

Price On Request



iLED VIDEO ID PH 6 - 02

ASSEMBLY MODE	SMD
PIXEL PITCH	6 mm
PIXEL DENSITY (pixel/m ²)	27777
PIXEL CONFIGURATION	1R1PG1B
UNIT BOARD RESOLUTION	32 X 32
VIEWING DISTANCE (M)	≥ 4 m
VIEWING ANGLE	Horizontal ≥140
VERTICAL AXIS	≥110
I/P VOLTAGE	230V AC, 50/60Hz
VIDEO SIGNAL / INPUT	RF, S-Video, RGB, RGBHV, YUV, YC, COMPOSITION
	Power Consumption
AVG/MAX (W/m ²)	1380
IP RATING	Indoor
DIMENSION	Optional

Price On Request



iLED VIDEO ID PH 7.62 - 03

ASSEMBLY MODE	SMD
PIXEL PITCH	7.62 mm
PIXEL DENSITY (pixel/m ²)	17222
PIXEL CONFIGURATION	1R1PG1B
UNIT BOARD RESOLUTION	32 X 32
VIEWING DISTANCE (M)	≥ 8m
VIEWING ANGLE	Horizontal ≥140
VERTICAL AXIS	≥110
I/P VOLTAGE	230V AC, 50/60Hz
VIDEO SIGNAL / INPUT	RF, S-Video, RGB, RGBHV, YUV, YC, COMPOSITION
	Power Consumption
AVG/MAX (W/m ²)	860
IP RATING	Indoor
DIMENSION	DIM : Optional

Price On Request



iLED VIDEO OD PH 10 - 04

ASSEMBLY MODE	SMD
PIXEL PITCH	10 mm
PIXEL DENSITY (pixel/m ²)	10000
PIXEL CONFIGURATION	1R1PG1B
UNIT BOARD RESOLUTION	32 X 16
VIEWING DISTANCE (M)	≥12m
VIEWING ANGLE	Horizontal ≥140
VERTICAL AXIS	≥110
I/P VOLTAGE	230V AC, 50/60Hz
VIDEO SIGNAL / INPUT	RF, S-Video, RGB, RGBHV, YUV, YC, COMPOSITION
	Power Consumption
AVG/MAX (W/m ²)	825
IP RATING	Indoor
DIMENSION	Optional

Price On Request



iLED VIDEO OD PH 12 - 05

PIXEL PITCH	12 mm
PIXEL DENSITY (pixel/m ²)	6944
PIXEL CONFIGURATION	2R1PG1B
UNIT BOARD RESOLUTION	80 x 80
VIEWING DISTANCE (M)	12~120
VIEWING ANGLE	Horizontal Axis 90, Vertical Axis 30
I/P VOLTAGE	I/P VOLTAGE : 230V AC, 50/60Hz
VIDEO SIGNAL / INPUT	RF, S-Video, RGB, RGBHV, YUV, YC, COMPOSITION
	Power Consumption
AVG/MAX (W/m ²)	600~1300 / ≥ 2000
IP RATING	Outdoor
DIMENSION	Optional

Price On Request



iLED VIDEO OD PH 14 - 06

PIXEL PITCH	14 mm
PIXEL DENSITY (pixel/m ²)	5102
PIXEL CONFIGURATION	2R1PG1B
PANEL RESOLUTION	80 x 64
VIEWING DISTANCE (M)	12~120
VIEWING ANGLE	Horizontal Axis 90,
VERTICAL AXIS	30, 60deg
I/P VOLTAGE	230V AC, 50/60Hz
VIDEO SIGNAL / INPUT	RF, S-Video, RGB, RGBHV, YUV, YC, COMPOSITION
	Power Consumption
AVG/MAX (W/m ²)	500~1000 / ≥1200
IP RATING	Outdoor
DIMENSION	Optional

Price On Request



iLED VIDEO OD PH 16 - 07

PIXEL PITCH	16 mm
PIXEL DENSITY (pixel/m ²)	3906
PIXEL CONFIGURATION	2R1PG1B
UNIT BOARD RESOLUTION	64 x 48
VIEWING DISTANCE (M)	12~130
VIEWING ANGLE	Horizontal Axis 90,120deg
VERTICAL AXIS	30-60deg
I/P VOLTAGE	230VAC,50/60Hz
VIDEO SIGNAL / INPUT	RF,S-Video, RGB,RGBHV, YUV, YC, COMPOSITION
	Power Consumption
AVG/MAX (W/m ²)	400~800 / ≥1100
IP RATING	Outdoor
DIMENSION	Optional

Price On Request



iLED VIDEO OD PH 20 - 08

PIXEL PITCH	20 mm
PIXEL DENSITY (pixel/m ²)	2500
PIXEL CONFIGURATION	2R1PG1B
UNIT BOARD RESOLUTION	64 x 48
VIEWING DISTANCE (M)	12~160
VIEWING ANGLE	Horizontal Axis 90, 120deg
VERTICAL AXIS	30-60deg
I/P VOLTAGE	230V AC, 50/60Hz
VIDEO SIGNAL / INPUT	RF, S-Video, RGB, RGBHV, YUV, YC, COMPOSITION
	Power Consumption
AVG/MAX (W/m ²)	350~700 / ≥ 750
IP RATING	Outdoor
DIMENSION	Optional

Price On Request



iLED RUNNING DISPLAY P3 RGB

PIXEL PITCH	3mm
PANEL RESOLUTION	64 x 48
VIEWING DISTANCE (M)	12~130
VIEWING ANGLE	Horizontal Axis 90,120deg
VERTICAL AXIS	30-60deg
I/P VOLTAGE	230V AC, 50/60Hz
VIDEO SIGNAL / INPUT	RF, S-Video, RGB, RGBHV, YUV, YC, COMPOSITION
AVG/MAX (W/m ²)	400~800 / ≥1100
IP RATING	Outdoor
DIMENSION	Optional




Price On Request



iLED RUNNING DISPLAY P4 RGB

PIXEL PITCH	4mm
PANEL RESOLUTION	64 x 48
VIEWING DISTANCE (M)	12~160
VIEWING ANGLE	Horizontal Axis 90, 120deg
VERTICAL AXIS	30-60 deg
I/P VOLTAGE	230V AC, 50/60Hz
VIDEO SIGNAL / INPUT	RF, S-Video, RGB, RGBHV, YUV, YC, COMPOSITION
AVG/MAX (W/m ²)	350~700 / ≥ 750
IP RATING	Outdoor
DIMENSION	Optional




Price On Request



iLED 3 CWL OD 01

MATERIAL	Aluminum Die Casting Graphite Black Finsh
MOUNTING	Surface Mount
I/P VOLTAGE	230V AC, 50/60Hz
RATED POWER	3W
LUMEN FLUX	360-300Lm
COLOR	W/WW/NW
DIMENSION	L-105 X W-36 X H-65mm
APPLICATION	Wall Decorative ,Garden lights




Rs.1,100/-



iLED 4 CWL OD 02

MATERIAL	Aluminum Die Casting Outdoor Wall Light Graphite Black Finish
MOUNTING	Surface Mount
I/P VOLTAGE	230V AC, 50/60Hz
RATED POWER	4W
LUMEN FLUX	480-400 Lm
COLOR	W/WW/NW
DIMENSION	L- 200 X W-200 X H-50 mm
APPLICATION	Wall Decorative ,Garden lights




Rs.3,500/-



iLED 4 CWL OD 03

MATERIAL	Square Outdoor Wall Light 4Way Graphite Black Finish
MOUNTING	Surface Mount
I/P VOLTAGE	230V AC, 50/60Hz
RATED POWER	4W
LUMEN FLUX	480 - 400Lm
COLOR	W/WW/NW
DIMENSION	W-50 X H-110 x L-110mm
APPLICATION	Garden lights
ANGLE	5°, 10°, 25°, 30°, 45°


Rs.2,700/-



iLED CWL OD 04-without Light source

MATERIAL	Aluminum Die Casting Graphite Black Finish
MOUNTING	Surface Mount
I/P VOLTAGE	230V AC, 50/60Hz
COLOR	W/WW/NW
RATED POWER	On request
DIMENSION	D-200mm X H-210 mm
APPLICATION	Bollards,Wall Decorative ,gate lights



Rs.1,950/-

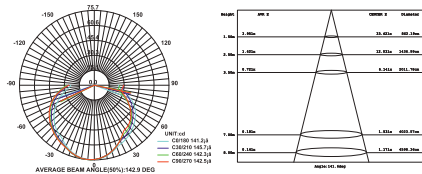

iLED CWL OD 05 -WITHOUT LIGHT SOURCE

MATERIAL	Aluminum Die Casting Graphite Black Finish
MOUNTING	Surface Mount
I/P VOLTAGE	230VAC,50/60Hz
COLOR	W/WW/NW
RATED POWER	On request
DIMENSION	D-65 X H-250 mm
APPLICATION	Wall Decorative ,gate lights



Rs.1,550/-

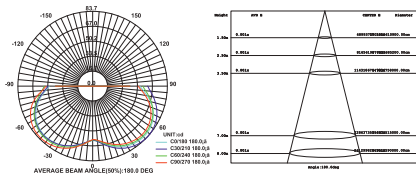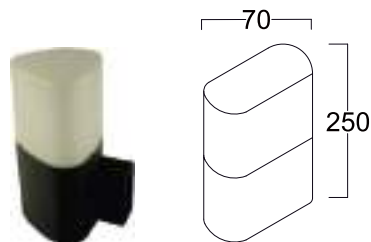

iLED CWL OD 06

MATERIAL	Aluminum Die Casting Graphite Black Finish
MOUNTING	Surface Mount
I/P VOLTAGE	230V AC, 50/60Hz
COLOR	W/WW/NW
RATED POWER	On request
DIMENSION	D-70 X H-250 mm
APPLICATION	Wall Decorative ,gate lights



Rs.1,550/-

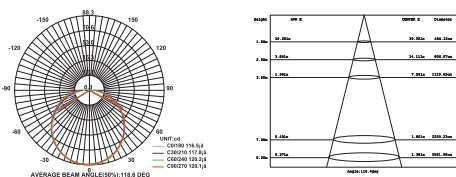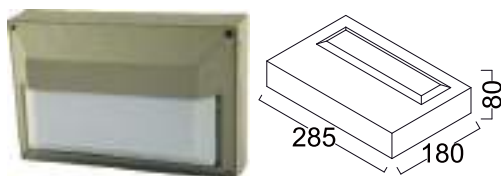

iLED 10 FD014 OD 07 ECO

MATERIAL	Aluminium die cast with polycarbonate milky diffuser
MOUNTING	Surface Mount
I/P VOLTAGE	230VAC,50/60Hz
RATED POWER	10W
LUMEN FLUX	1200 - 1000 Lm
COLOR	W/WW/NW
DIMENSION	L-285 X W-180 X H-80 mm
APPLICATION	Garden lights




Rs.3,500/-

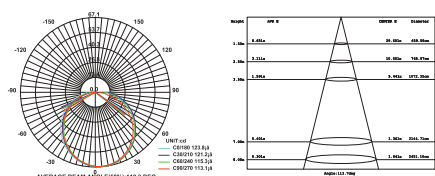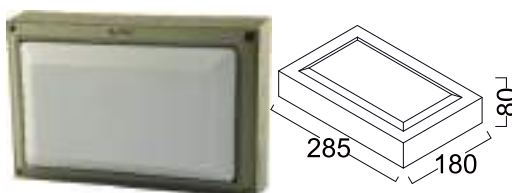

iLED 10 FD014 OD 08 ECO

MATERIAL	Aluminium die cast with polycarbonate milky diffuser
MOUNTING	Surface Mount
I/P VOLTAGE	230VAC,50/60Hz
RATED POWER	10W
LUMEN FLUX	1200 - 1000 Lm
COLOR	W/WW/NW
DIMENSION	L-285 X W-180 X H-80 mm
APPLICATION	Garden lights




Rs.3,500/-



iLED FD014 OD 09 ECO

MATERIAL	Aluminium die cast with poly carbonate milky diffuser
MOUNTING	Surface Mount
I/P VOLTAGE	230VAC,50/60Hz
RATED POWER	10W
LUMEN FLUX	1200 - 1000 Lm
COLOR	W/WW/NW
DIMENSION	L-285 X W-180 X H-80 mm
APPLICATION	Garden lights




Rs.3,500/-



iLED 5 U/D OD 10

MATERIAL	Ventilated Powder coated Die cast Aluminium with Tempered glass
MOUNTING	Surface Mount
I/P VOLTAGE	230V AC, 50/60Hz
RATED POWER	5W
LUMEN FLUX	600-500Lm
COLOR	W/WW/NW
DIMENSION	L-65 X W-77 x H-90mm
APPLICATION	Outdoor , Garden & Wall light
ANGLE	5°, 10°, 25°, 30°, 45°




Rs.2,550/-



iLED 5+5 U&D OD 11

MATERIAL	Ventilated Powder coated Diecast Aluminium with Tempered glass
MOUNTING	Surface Mount
I/P VOLTAGE	230VAC,50/60Hz
RATED POWER	10W
LUMEN FLUX	1200-900Lm
COLOR	W/WW
DIMENSION	L-65 X W-150 x H-90mm
APPLICATION	Outdoor , Garden & Wall light
ANGLE	5°, 10°, 25°, 30°, 45°

Rs.4,250/-




iLED 5 U / D OD 12

MATERIAL	Ventilated Powder coated Die cast Aluminium with Tempered glass & Reflector
MOUNTING	Surface Mount
I/P VOLTAGE	230V AC, 50/60Hz
RATED POWER	5W
LUMEN FLUX	600-450Lm
COLOR	W/WW/NW
DIMENSION	L-80 X W-75 x H-64mm
APPLICATION	Outdoor, Garden & Wall light
ANGLE	5°, 10°, 25°, 30°, 45°

Rs.1,750/-


iLED 8 U / D OD 13

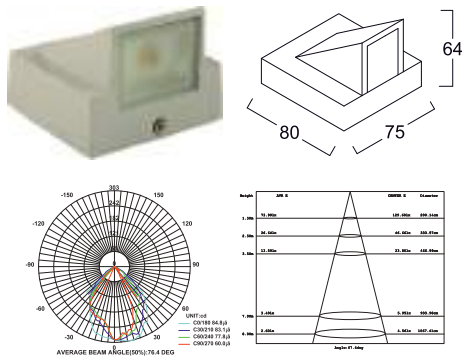

MATERIAL	Ventilated Powder coated Die cast Aluminium with Tempered glass & Reflector
MOUNTING	Surface Mount
I/P VOLTAGE	230V AC, 50/60Hz
RATED POWER	8W
LUMEN FLUX	960-800Lm
COLOR	W/WW/NW
DIMENSION	L-80 X W-75 x H-64mm
APPLICATION	Outdoor, Garden & Wall light
ANGLE	5°, 10°, 25°, 30°, 45°

Rs.1,950/-


iLED 5 + 5 U & D OD 14

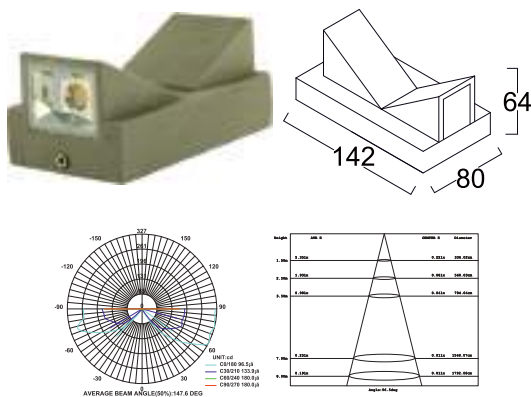

MATERIAL	Ventilated Powder coated Die cast Aluminium with Tempered glass & Reflector
MOUNTING	Surface Mount
I/P VOLTAGE	230V AC, 50/60Hz
RATED POWER	10W
LUMEN FLUX	1200-100Lm
COLOR	W/WW/NW
DIMENSION	L-80 X W-142 x H-64mm
APPLICATION	Outdoor, Garden & Wall light
ANGLE	5°, 10°, 25°, 30°, 45°

Rs.2,250/-


iLED 8 + 8 U & D OD 15

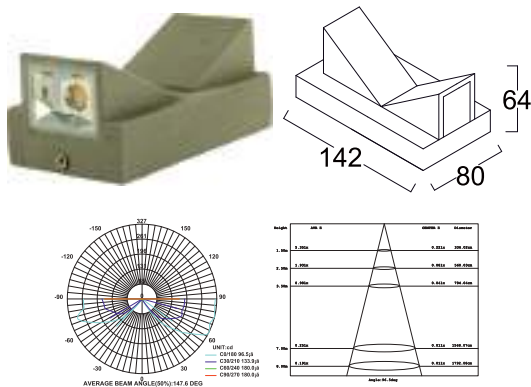

MATERIAL	Ventilated Powder coated Die cast Aluminium with Tempered glass & Reflector
MOUNTING	Surface Mount
I/P VOLTAGE	230V AC, 50/60Hz
RATED POWER	16W
LUMEN FLUX	1920-1600Lm
COLOR	W/WW/NW
DIMENSION	L-80 X W-142 x H-64mm
APPLICATION	Outdoor, Garden & Wall light
ANGLE	5°, 10°, 25°, 30°, 45°


Rs.3,550/-

iLED 12 U & D OD 16

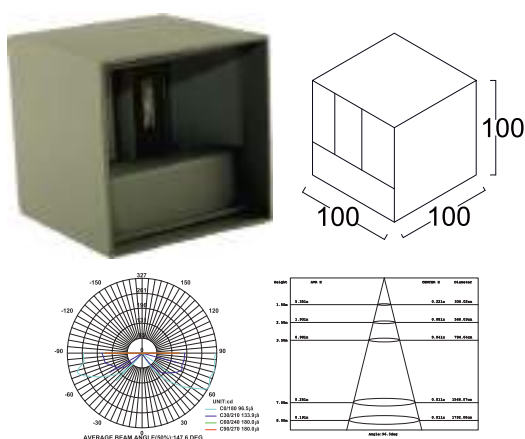

MATERIAL	Ventilated Powder coated Die cast Aluminium with Tempered glass & Angle Adjustable
MOUNTING	Surface Mount
I/P VOLTAGE	230V AC, 50/60Hz
RATED POWER	12W
LUMEN FLUX	1440-1080Lm
COLOR	W/WW/NW
DIMENSION	L-100 X W-100 x H-100mm
APPLICATION	Outdoor, Garden & Wall light


Rs.4,100/-

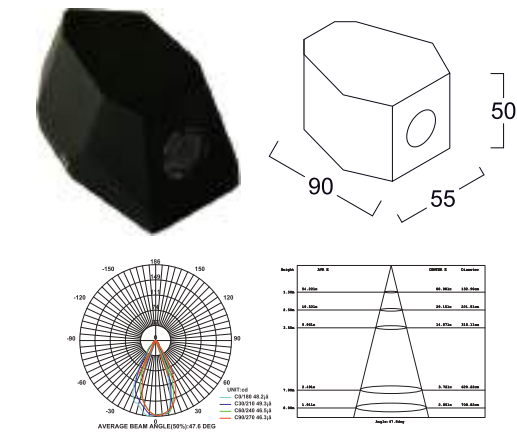

iLED 5 U / D 8022 OD 17

MATERIAL	Ventilated Powder coated Die cast Aluminium with Tempered glass
MOUNTING	Surface Mount
I/P VOLTAGE	230V AC, 50/60Hz
RATED POWER	5W
LUMEN FLUX	600-450Lm
COLOR	W/WW/NW
DIMENSION	L-90 X W-55 x H-50mm
APPLICATION	Outdoor , Garden & Wall light
ANGLE	5°, 10°, 25°, 30°, 45°


Rs.1,950/-

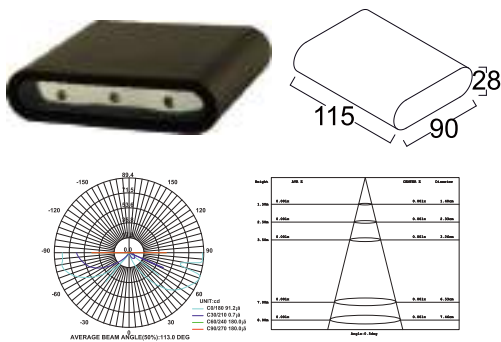

iLED 3+3 U & D 8023 OD 18

MATERIAL	Ventilated Powder coated Die cast Aluminium with Tempered glass
MOUNTING	Surface Mount
I/P VOLTAGE	230V AC, 50/60Hz
RATED POWER	6W
LUMEN FLUX	720-540Lm
COLOR	W/WW/NW
DIMENSION	L-115 X W-28 x H-90mm
APPLICATION	Outdoor, Garden & Wall light


Rs.1,750/-

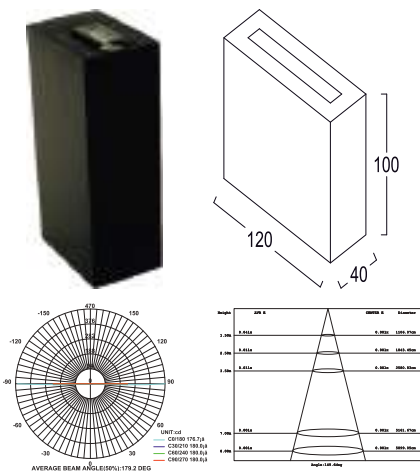

iLED 3+3 U & D OD 19 - NARROW BEAM

MATERIAL	Ventilated Powder coated Die cast Aluminium with Narrow Beam Lens
MOUNTING	Surface Mount
I/P VOLTAGE	230V AC, 50/60Hz
RATED POWER	6W
LUMEN FLUX	720-600Lm
COLOR	W/WW/NW
DIMENSION	L-120 X W-40 X H-100mm
APPLICATION	Outdoor, Garden & Wall light etc.


Rs.2,950/-

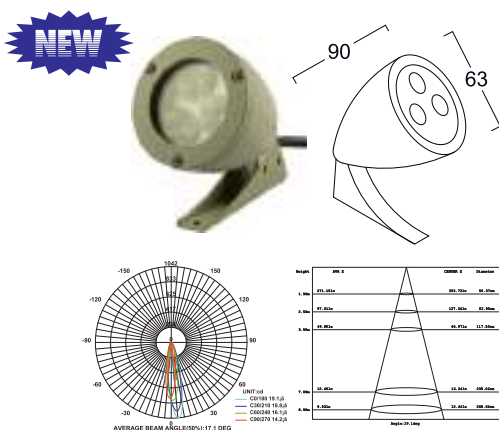

iLED 6 U / D OD 20 LUXPRO®

MATERIAL	Ventilated Powder coated Die cast Aluminium with Narrow Beam Lens
MOUNTING	Surface Mount
I/P VOLTAGE	230V AC, 50/60Hz
RATED POWER	6W
LUMEN FLUX	360-270Lm
COLOR	W/WW/NW
DIMENSION	D-63 X H-90mm
APPLICATION	Outdoor, Garden & Wall light etc.


Rs.2,700/-

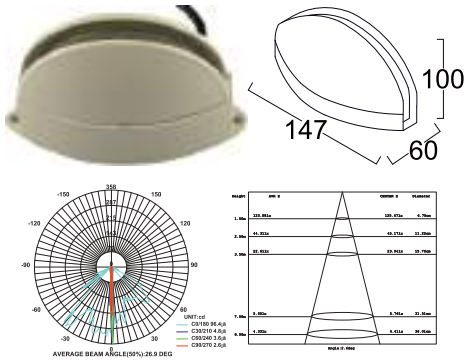

iLED 8 RL SM OD 21

MATERIAL	Ventilated Powder coated Die cast Aluminium with ray lens
MOUNTING	Surface Mount
I/P VOLTAGE	230V AC, 50/60Hz
RATED POWER	8W
LUMEN FLUX	960-720Lm
COLOR	W/WW/NW
DIMENSION	L-147 X W-60 X H-100mm
APPLICATION	Outdoor, Garden & Wall light etc.


Rs.2,950/-

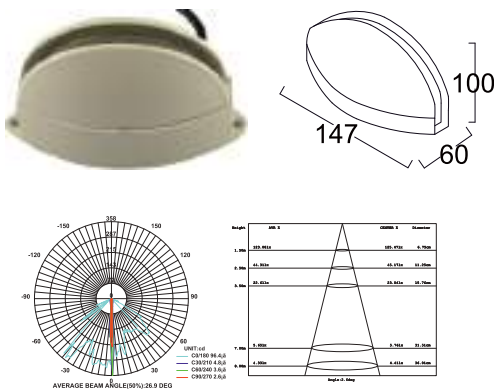

iLED 12 RL SM OD 22

MATERIAL	Ventilated Powder coated Die cast Aluminium with ray lens
MOUNTING	Surface Mount
I/P VOLTAGE	230V AC, 50/60Hz
RATED POWER	12W
LUMEN FLUX	1440-1200Lm
COLOR	W/WW/NW
DIMENSION	L-147 X W-60 X H-100mm
APPLICATION	Outdoor, Garden & Wall light etc.


Rs.4,250/-

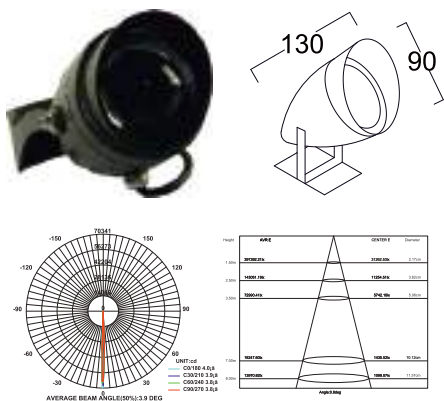

iLED 10 OD 23 - VERY NARROW BEAM

MATERIAL	Ventilated Powder coated Die cast Aluminium with Special narrow beam angle Tempered glass
MOUNTING	Surface Mounting
I/P VOLTAGE	230V AC, 50/60Hz
RATED POWER	10W
LUMEN FLUX	1200-900Lm
COLOR	W/WW/NW
DIMENSION	L-90 X W-130 x H-160mm
APPLICATION	Facade, Hoarding, Name Board Building, Tunnel, Petrol Bunk Stage etc.




Rs.6,500/-

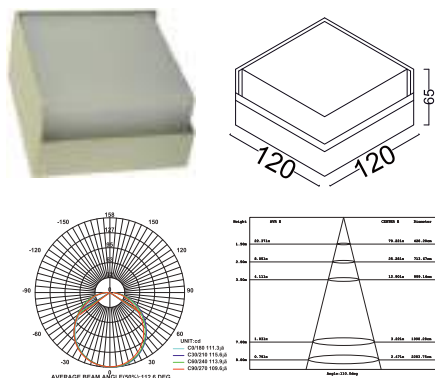

iLED 8 WL OD B815 24

MATERIAL	Ventilated Powder coated Die cast Aluminium with PMMA diffuser
MOUNTING	Surface Mount
I/P VOLTAGE	230V AC, 50/60Hz
RATED POWER	8W
LUMEN FLUX	960-800Lm
COLOR	W/WW/NW
DIMENSION	L-120 X W-120 X H-65mm
APPLICATION	Outdoor, Garden & Wall light etc.

Rs.1,950/-



iLED 8 WL OD B816 25

MATERIAL

Ventilated Powder coated Die cast Aluminium with PMMA diffuser

MOUNTING

Surface Mount

I/P VOLTAGE

230V AC, 50/60Hz

RATED POWER

8W

LUMEN FLUX

960-800Lm

COLOR

W/WW/NW




DIMENSION

D-120 X H-65mm

APPLICATION

Outdoor, Garden & Wall light etc.

Rs.1,950/-



iLED 6 WL OD B822 26

MATERIAL

Ventilated Powder coated Die cast Aluminium with Tempered Glass

MOUNTING

Surface Mount

I/P VOLTAGE

230V AC, 50/60Hz

RATED POWER

6W

LUMEN FLUX

720-600Lm

COLOR

W/WW/NW




DIMENSION

L-102 X W-92 X H-76mm

APPLICATION

Outdoor, Garden & Wall light etc.

Rs.1,600/-



iLED 3+3 U&D OD B854 27

MATERIAL

Ventilated Powder coated Die cast Aluminium with Lens

MOUNTING

Surface Mount

I/P VOLTAGE

230V AC, 50/60Hz

RATED POWER

6W

LUMEN FLUX

720-600Lm

COLOR

W/WW/NW




DIMENSION

L-86 X W-58 X H-36mm

APPLICATION

Outdoor, Garden & Wall light etc.

Rs.1,950/-



iLED 4+4 U & D OD 28 LUXPRO®

MATERIAL

Ventilated Powder coated Die cast Aluminium with V-Shaped Beam Lens

MOUNTING

Surface Mount

I/P VOLTAGE

230V AC, 50/60Hz

RATED POWER

8W

LUMEN FLUX

960-800Lm

COLOR

W/WW/NW

DIMENSION

L-120 X W-90 X H-40mm

APPLICATION




Outdoor, Garden & Wall light etc.

Rs.3,100/-

WALL LIGHTS - OUTDOOR

iLED®

NEW



iLED 6+6 U & D OD 29 LUXPRO®

MATERIAL

Ventilated Powder coated Die cast Aluminium with V-Shaped Beam Lens

MOUNTING

Surface Mount

I/P VOLTAGE

230V AC, 50/60Hz

RATED POWER

12W

LUMEN FLUX

1440-1200Lm

COLOR

W/WW/NW

DIMENSION




L-180 X W-90 X H-40mm

APPLICATION

Outdoor, Garden & Wall light etc.

Rs.4,200/-

NEW



iLED 4*2 WL OD 30 LUXPRO®

MATERIAL

Ventilated Powder coated Die cast Aluminium with V-Shaped Beam Lens

MOUNTING

Surface Mount

I/P VOLTAGE

230V AC, 50/60Hz

RATED POWER

8W

LUMEN FLUX

960-800Lm

COLOR

W/WW/NW




DIMENSION

D-90 X H-90mm

APPLICATION

Outdoor, Garden & Wall light etc.

Rs.4,500/-



iLED 6 SM OD 31 - 3928

MATERIAL

Ventilated Aluminum Cooling with Reflector

MOUNTING

Surface Mount

I/P VOLTAGE

230V AC, 50/60Hz

RATED POWER

6W

LUMEN FLUX

720-600 Lm

COLOR

W/ WW / NW

DIMENSION




D - 65 X H-100 mm

APPLICATION

Hotel, Show room, Home, Office, Auditorium, Theaters

5°, 10°, 25°, 30°, 45°

Rs.2,300/-



iLED 10 SM OD 32 - 3931

MATERIAL

Ventilated Aluminum Cooling with Reflector

MOUNTING

Surface Mount

I/P VOLTAGE

230V AC, 50/60Hz

RATED POWER

10W

LUMEN FLUX

1200-1000 Lm

COLOR

W/ WW / NW

DIMENSION


D - 90 X H-200 mm

APPLICATION

Hotel, Show room, Home, Office, Auditorium, Theaters

5°, 10°, 25°, 30°, 45°


Rs.3,050/-

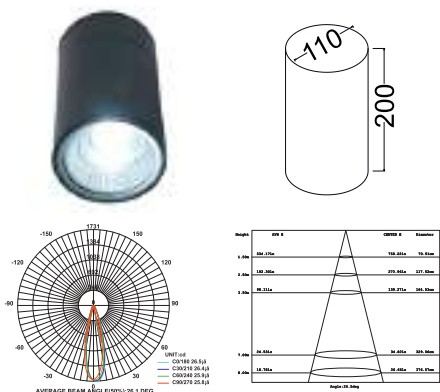

iLED 15 SM OD 33 - 3935

MATERIAL	Ventilated Aluminum Cooling with Reflector
MOUNTING	Surface Mount
I/P VOLTAGE	230V AC, 50/60Hz
RATED POWER	15W
LUMEN FLUX	1800-1500 Lm
COLOR	W/ WW / NW
DIMENSION	D-110 X H-200 mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters
ANGLE	5°, 10°, 25°, 30°, 45°


Rs.3,350/-

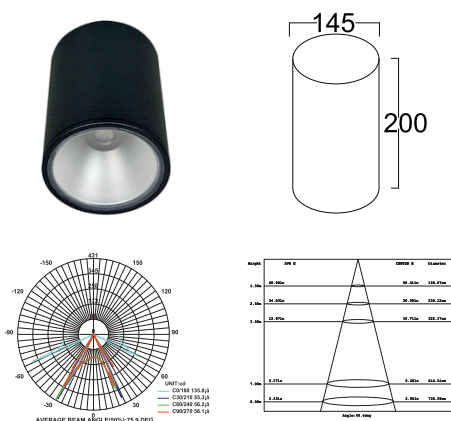

iLED 20 SM OD 34 - 3936

MATERIAL	Ventilated Aluminum Cooling with Reflector
MOUNTING	Surface Mount
I/P VOLTAGE	230V AC, 50/60Hz
RATED POWER	20W
LUMEN FLUX	2400-2000 Lm
COLOR	W/ WW / NW
DIMENSION	D - 145 X H-200 mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters
ANGLE	5°, 10°, 25°, 30°, 45°


Rs.4,600/-

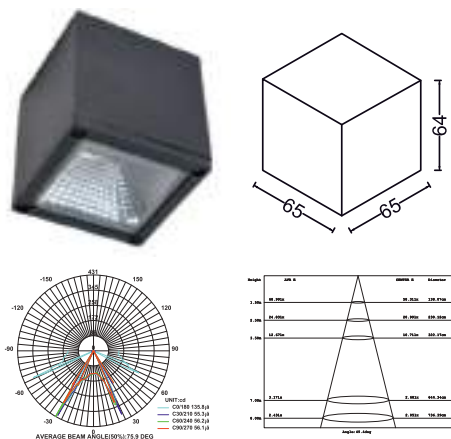

iLED 6 SM OD 35 - 3955

MATERIAL	Ventilated Aluminum Cooling with Reflector
MOUNTING	Surface Mount
I/P VOLTAGE	230V AC, 50/60Hz
RATED POWER	6 W
LUMEN FLUX	720-600 Lm
COLOR	W/ WW / NW
DIMENSION	L - 65 X W - 65 X H- 64 mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters
ANGLE	5°, 10°, 25°, 30°, 45°


Rs.2,500/-

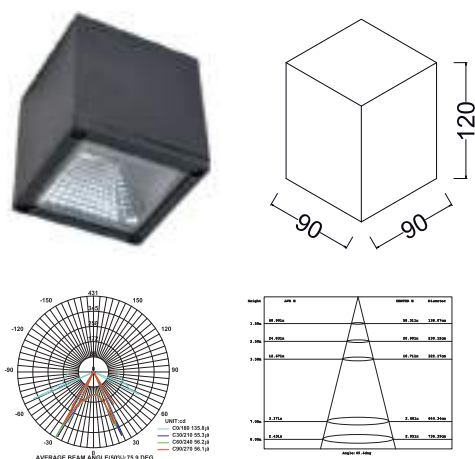

iLED 10 SM OD 36 - 3956

MATERIAL	Ventilated Aluminum Cooling with Reflector
MOUNTING	Surface Mount
I/P VOLTAGE	230V AC, 50/60Hz
RATED POWER	10 W
LUMEN FLUX	1200-1000 Lm
COLOR	W/ WW / NW
DIMENSION	L - 90 X W-90 X H-120 mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters
ANGLE	5°, 10°, 25°, 30°, 45°


Rs.3,050/-

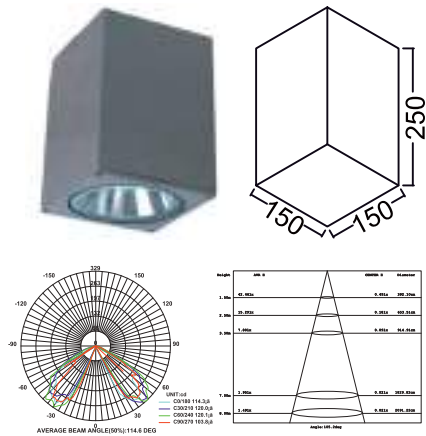

iLED 20 SM OD 37 - 3956

MATERIAL	Ventilated Aluminum Cooling with Reflector
MOUNTING	SurfaceMount
I/P VOLTAGE	230V AC, 50/60Hz
RATED POWER	20W
LUMEN FLUX	2400-2000 Lm
COLOR	W/ WW / NW
DIMENSION	L - 150 X W-150 X H- 250 mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters
ANGLE	5°, 10°, 25°, 30°, 45°


Rs.4,600/-

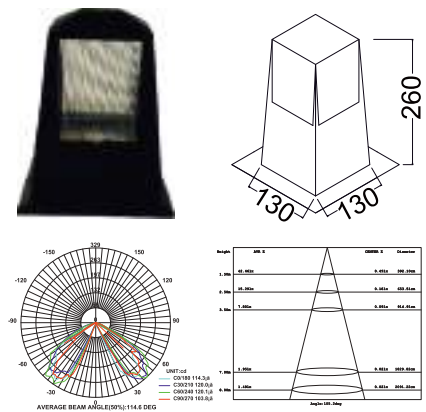

iLED 10 / 15 CWL 38

MATERIAL	Ventilated Powder coated Die cast Aluminium with Tempered Glass
MOUNTING	Surface Mount
I/P VOLTAGE	230V AC, 50/60Hz
RATED POWER	10 / 15 W
LUMEN FLUX	1200-1000 Lm / 1800-1500Lm
COLOR	W/ WW / NW
DIMENSION	L - 130 X W-130 X H- 260 mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters


Rs.3,300/-

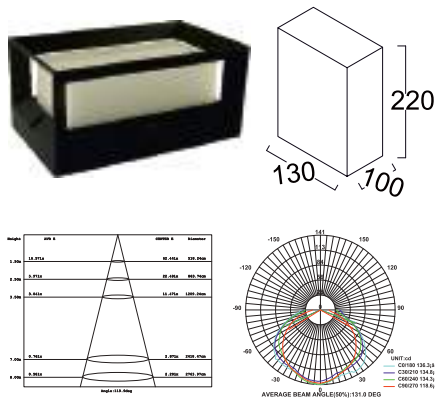

iLED 10 / 15 CWL 39

MATERIAL	Ventilated Powder coated Die cast Aluminium with Tempered Glass
MOUNTING	Surface Mount
I/P VOLTAGE	230V AC, 50/60Hz
RATED POWER	10 / 15 W
LUMEN FLUX	1200-1000 Lm / 1800-1500Lm
COLOR	W/ WW / NW
DIMENSION	L - 130 X W-100 X H- 220 mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters

Rs.3,300/-

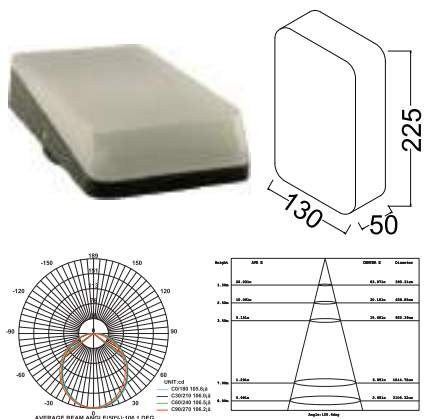

iLED 12 CWL 40



MATERIAL	Ventilated Powder coated Die cast Aluminium with Tempered Glass
MOUNTING	Surface Mount
I/P VOLTAGE	230V AC, 50/60Hz
RATED POWER	12 W
LUMEN FLUX	1440-1200Lm
COLOR	W/ WW / NW
DIMENSION	L - 135 X W-225 X H- 50 mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters

Rs.2,950/-

WALL LIGHTS - OUTDOOR





NEW

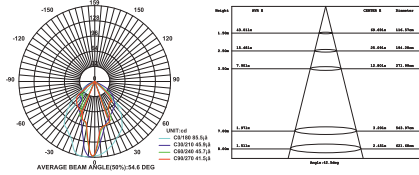**iLED 6 U / D 41 LUXPRO®**

MATERIAL	Ventilated Powder coated Die cast with toughened glass
MOUNTING	Surface Mount
I/P VOLTAGE	230V AC, 50/60Hz
RATED POWER	6W
LUMEN FLUX	720-600Lm
COLOR	W/WW/NW
DIMENSION	L-120 X W-25 X H-35mm
APPLICATION	Outdoor, Garden & Wall light etc.

Rs.1,500/-



NEW

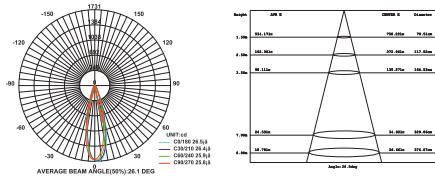**iLED 6 RPL 152 - 42** **LUXPRO®**

MATERIAL	Ventilated Powder coated Die cast Aluminium with Lens & Tempered Glass
MOUNTING	Surface Mount
I/P VOLTAGE	230V AC, 50/60Hz
RATED POWER	6W
LUMEN FLUX	720-600 Lm
COLOR	W/ WW / NW
DIMENSION	L-210 X W-80 X H-45mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters

Rs.2,450/-

NEW

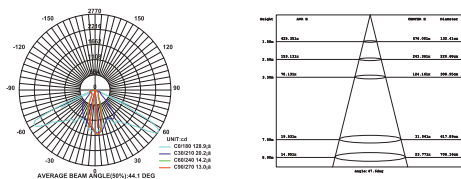

iLED 30 WL OD 43 **LUXPRO®**



MATERIAL	Ventilated Powder coated Die cast Aluminium with wide Beam Lens
MOUNTING	Wall Mount
I/P VOLTAGE	230V AC, 50/60Hz
RATED POWER	30W
LUMEN FLUX	3600-3000Lm
COLOR	W/WW/NW
DIMENSION	L-175 X W-140 X H-42mm
APPLICATION	Outdoor, Garden & Wall light etc.
ANGLE	5°, 10°, 25°, 30°, 45°



Rs.5,500/-







iLED 1 / 3 WDL 44

MATERIAL	Aluminium Die Cast with Powder coated
MOUNTING	Inwall
I/P VOLTAGE	230VAC,50/60Hz
RATED POWER	1/3W
LUMEN FLUX	120-100 Lm
COLOR	W/WW/NWDIM :
DIMENSION	L-75 X W-60 X H-60mm
APPLICATION	Bed rooms, passages, corridors, etc.



Rs.1,037/-

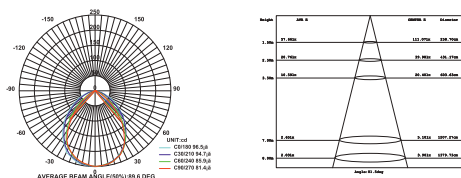

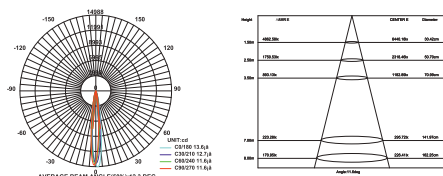

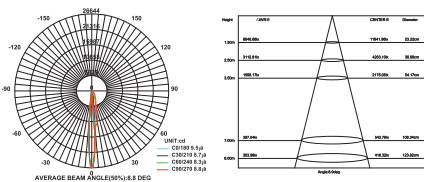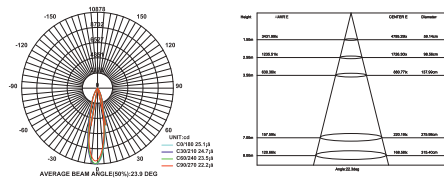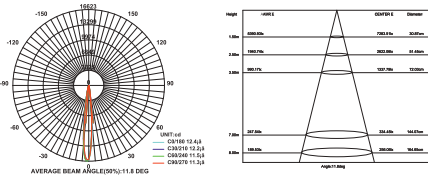

NEW

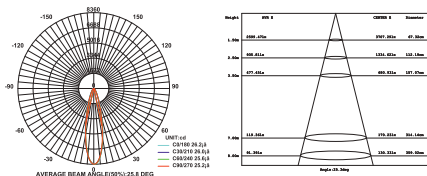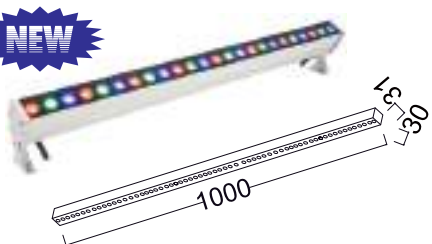

iLED 36 WW 05

MATERIAL

Aluminum housing with PMMA lens & tempered glass

MOUNTING

Surface Mount using Aluminium clamps Adjustable

I/P VOLTAGE

230V AC, 50/60Hz

RATED POWER

36W

LUMEN FLUX

4320-3600Lm

COLOR

W/WW/NW / AMBER / RGB

DIMENSION

L-1000 X W-60 X H-60 mm

APPLICATION

Decorative Lighting, Wash walls of buildings, Clubs, Hotels, Stages, Parks, 5°, 10°, 25°, 30°, 45°

ANGLE

Rs.8,500/-

iLED 72 WW 06

MATERIAL

Aluminum housing with PMMA lens & tempered glass

MOUNTING

Surface Mount using Aluminium clamps Adjustable

I/P VOLTAGE

230V AC, 50/60Hz

RATED POWER

60W

LUMEN FLUX

7200- 6000Lm

COLOR

W/WW/NW

DIMENSION

L-1000 X W-84 X H-60 mm

APPLICATION

Decorative Lighting, Wash walls of buildings, Clubs, Hotels, Stages, Parks, 5°, 10°, 25°, 30°, 45°

ANGLE

Rs.12,500/-

iLED 22/32 BSPL 07

MATERIAL

Aluminum housing with PMMA lens & tempered glass

MOUNTING

Surface Mount using Aluminium clamps Adjustable

I/P VOLTAGE

230V AC, 50/60Hz

RATED POWER

22/32 W

LUMEN FLUX

2640/2200 Lm

COLOR

W/WW/NW

DIMENSION

L- 840 X W-120 X H-80mm

APPLICATION

ADVERTISING, BILLBOARD, DISPLAY AND FACADE 5°, 10°, 25°, 30°, 45°

ANGLE

Rs.6,700/-

iLED 30 WW 08 LUXPRO®

MATERIAL

Ap04 with Special PMMA lens with IP67 Rated

MOUNTING

Surface Mount using Aluminium clamps

I/P VOLTAGE

230V AC, 50/60Hz

RATED POWER

30W

LUMEN FLUX

3600-3000Lm

COLOR

W/WW/NW / AMBER / RGB

DIMENSION

L-1000 X W-31 X H-30 mm

APPLICATION

Decorative Lighting, Wash walls of buildings, Clubs, Hotels, Stages, Parks, 5°, 10°, 25°, 30°, 45°



ANGLE

Rs.2,950/-

WALL WASHERS - OUTDOOR

iLED®

NEW

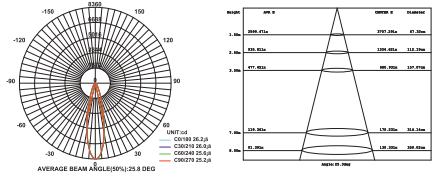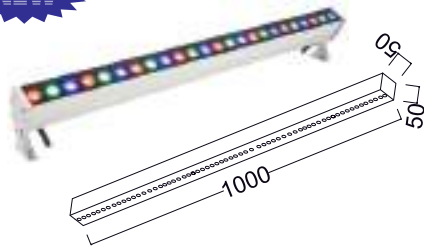

iLED 18 WW 09 RGB DMX LUXPRO®

MATERIAL

Aluminum housing with PMMA lens & tempered glass

MOUNTING

Surface Mount using Aluminium clamps Adjustable

I/P VOLTAGE

24V DC

RATED POWER

18 W

LUMEN FLUX

2160- 1800Lm

COLOR

RGB DMX

DIMENSION

L-1000 X W-50 X H-50 mm



APPLICATION

Decorative Lighting, Wash walls of buildings, Clubs, Hotels, Stages, Parks, Plazas, Commercial Building Facades, Art Galleries, etc., 5°, 10°, 25°, 30°, 45°

ANGLE

Rs.8,000/-

NEW

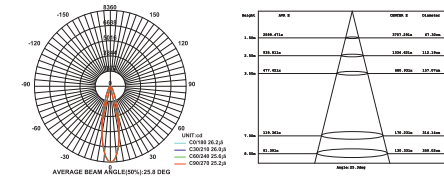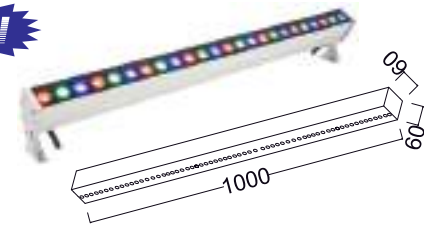

iLED 36 WW 10 RGB DMX LUXPRO®

MATERIAL

Aluminum housing with PMMA

Lens & tempered glass

MOUNTING

Surface Mount using Aluminium clamps Adjustable

I/P VOLTAGE

24V DC

RATED POWER

36 W

LUMEN FLUX

4320-3600Lm

COLOR

RGB DMX

DIMENSION

L-1000 X W-60 X H-60 mm



APPLICATION

Decorative Lighting, Wash walls of buildings, Clubs, Hotels, Stages, Parks, Plazas, Commercial Building Facades, Art Galleries, etc., 5°, 10°, 25°, 30°, 45°

ANGLE

Rs.12,500/-

NEW

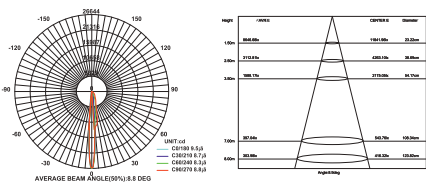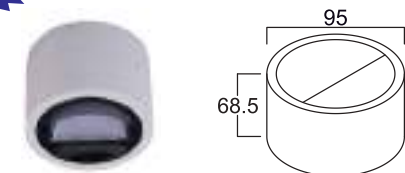

iLED 12 WW SM 11 WW (INDOOR) LUXPRO®

MATERIAL

Aluminum housing with PMMA lens

MOUNTING

Surface Mount

I/P VOLTAGE

230V AC, 50/60Hz

RATED POWER

22/32 W

LUMEN FLUX

2640/2200 Lm

COLOR

W/WW/NW

DIMENSION



D-95 X H-68.5mm

APPLICATION

Decorative Lighting, Wash walls of buildings, Clubs, Hotels, Stages, Parks,

Rs.2,500/-

NEW

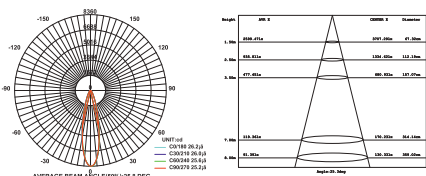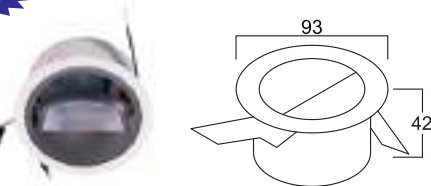

iLED 12 WW RM 12 WW (INDOOR) LUXPRO®

MATERIAL

Aluminum housing with PMMA lens

MOUNTING

Recess Mount

I/P VOLTAGE

230V AC, 50/60Hz

RATED POWER

30W

LUMEN FLUX

3600-3000Lm

COLOR

W/WW/NW / AMBER / RGB

DIMENSION

D- 93 X H- 42mm

APPLICATION


Decorative Lighting, Wash walls of buildings, Clubs, Hotels, Stages, Parks,

Rs.2,500/-

WALL WASHERS - OUTDOOR

iLED®

NEW

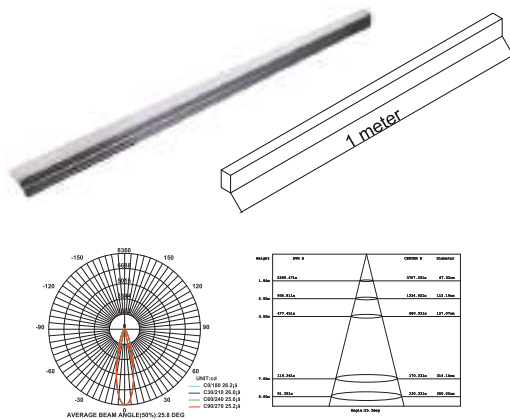


iLED 10 WW 13 WW (INDOOR) LUXPRO®

MATERIAL	Aluminum housing with PMMA lens & tempered glass
MOUNTING	Surface Mount using Aluminium clamps Adjustable
I/P VOLTAGE	24V DC
RATED POWER	10 W
LUMEN FLUX	1200- 1000Lm
COLOR	RGB / W/WW/NW
DIMENSION	1meter
APPLICATION	Decorative Lighting, Wash walls of buildings, Clubs, Hotels, Stages, Parks, Plazas, Commercial Building Facades, Art Galleries, etc.,

Rs.4,500/-


WINDOW SILL / RAY LIGHT - OUTDOOR

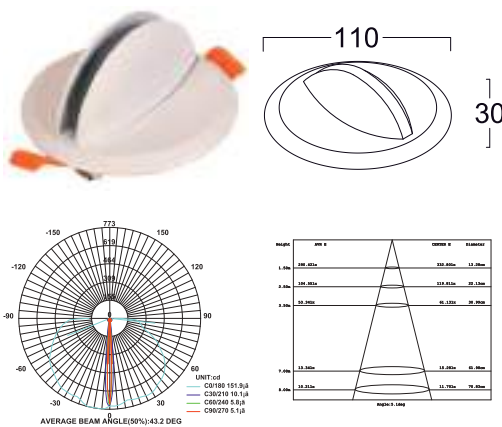

iLED 8 RL RM 01

MATERIAL	Ventilated Powder coated Die cast Aluminium with ray lens
MOUNTING	Recess Mount
I/P VOLTAGE	230VAC, 50/60Hz
RATED POWER	8W
LUMEN FLUX	960-720Lm
COLOR	W/WW/NW
DIMENSION	L-110 X H-30mm
APPLICATION	Hotel, Show room, Home, Office, Auditorium, Theaters.


Rs.2,950/-

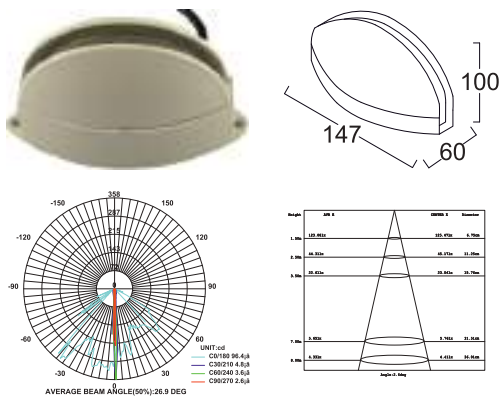

iLED 8 RL SM OD 02

MATERIAL	Ventilated Powder coated Die cast Aluminium with ray lens
MOUNTING	Surface Mount
I/P VOLTAGE	230V AC, 50/60Hz
RATED POWER	8W
LUMEN FLUX	960-720Lm
COLOR	W/WW/NW
DIMENSION	L-147 X W-60 X H-100mm
APPLICATION	Outdoor, Garden & Wall light etc.

Rs.2,950/-

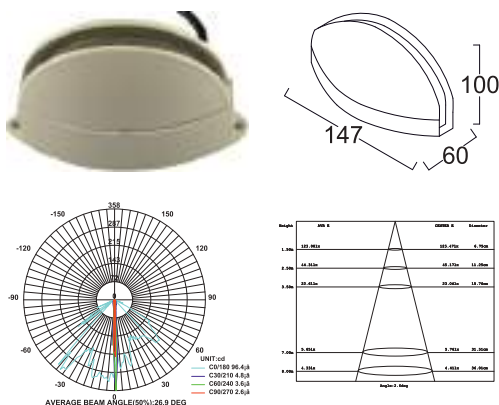


iLED 12 RL SM OD 03

MATERIAL	Ventilated Powder coated Die cast Aluminium with ray lens
MOUNTING	Surface Mount
I/P VOLTAGE	230V AC, 50/60Hz
RATED POWER	12W
LUMEN FLUX	1440-1200Lm
COLOR	W/WW/NW
DIMENSION	L-147 X W-60 X H-100mm
APPLICATION	Outdoor, Garden & Wall light etc.

Rs.4,250/-


iLED 3D A16 -01



MATERIAL	Stainless Steel Housing with Transparent Acrylic cover
MOUNTING	Floor Mounting
RATED POWER	90/450W
DIMENSION	L-70 X W-74 X H-70 mm
APPLICATION	Indoors Laying, Non waterproof

Price on request


iLED 3D A08- 02



MATERIAL	Stainless Steel Housing with Transparent Acrylic cover
MOUNTING	Floor Mounting
RATED POWER	10/50W
DIMENSION	L-25 X W-31 X H- 25 mm
APPLICATION	Indoors Laying, Non waterproof

Price on request


iLED 3D A03-03



MATERIAL	Aluminum Housing with Transparent Acrylic cover
MOUNTING	Floor Mounting
IP VOLTAGE	230V AC, 50/60Hz
RATED POWER	5/15W
DIMENSION	L-92 X W-13mm X H- 8 mm
APPLICATION	Indoors Laying, Non waterproof


Price on request

iLED 3D T10- 04



MATERIAL	White Acrylic plate with Transparent / Brown Acrylic cover
MOUNTING	Floor Mounting
IP VOLTAGE	230V AC, 50/60Hz
RATED POWER	10/50W
DIMENSION	L-31 X W-35 X H-31mm
APPLICATION	Indoors Laying, Non waterproof


Price on request



iLED 3D C04-05

MATERIAL	Plated - painted Iron with Polycarbonate Strips cover
MOUNTING	Ceiling Mounting
LIGHT SOURCE	SMD 5050
IP VOLTAGE	230V AC, 50/60Hz
RATED POWER	90/500W
DIMENSION	D-140 X H-105cm
APPLICATION	Indoors Laying, Non waterproof


Price on request



iLED 3D C08-06

MATERIAL	Stainless steel and Aluminum with Polycarbonate cover
MOUNTING	Ceiling Mounting
LIGHT SOURCE	SMD 5050
IP VOLTAGE	230V AC, 50/60Hz
RATED POWER	80/400W
DIMENSION	L-135 X W-130 X H-122 mm
APPLICATION	Indoors Laying, Non water



Price on request



iLED 3D C06-07

MATERIAL	Iron with Nickel plating+ steelmirror with polycarbonate+ crystal glassball Strips cover
MOUNTING	Ceiling Mounting
LIGHT SOURCE	SMD 5050
IP VOLTAGE	230V AC, 50/60Hz
RATED POWER	90/500W
DIMENSION	D-140 X H-105cm
APPLICATION	Indoors Laying, Non waterproof


Price on request

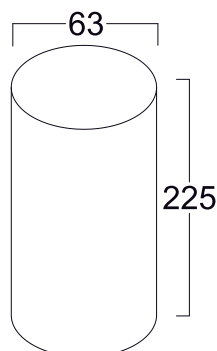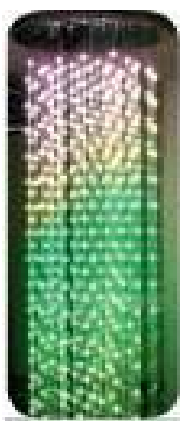

iLED 3D C05-08

MATERIAL	Iron with Nickel plating+ steelmirror with polycarbonate+ crystal glassball Strips cover
MOUNTING	Ceiling Mounting
LIGHT SOURCE	SMD 5050
IP VOLTAGE	230V AC, 50/60Hz
RATED POWER	150/270W
DIMENSION	D-63 X H-225cm
APPLICATION	Indoors Laying, Non waterproof


Price on request



iLED 3D MC05-09

MATERIAL	Iron with nickel plating, High transparent crystal ball material with polycarbonate cover
MOUNTING	Ceiling Mounting
LIGHT SOURCE	SMD 5050
IP VOLTAGE	230V AC, 50/60Hz
RATED POWER	26/52W
DIMENSION	D-20 X H-90cm
APPLICATION	Indoors Laying, Non waterproof


Price on request



iLED 3D C20-10

MATERIAL	Stainless steel and Aluminum with Polycarbonate cover
MOUNTING	Ceiling Mounting
LIGHT SOURCE	SMD 5050
IP VOLTAGE	230V AC, 50/60Hz
RATED POWER	400/1800W
DIMENSION	D-200cm
APPLICATION	Indoors Laying, Non waterproof



Price on request



iLED 3D C21-011

MATERIAL	Iron with the baking varnish disposal with polycarbonate strips cover
MOUNTING	Ceiling Mounting
LIGHT SOURCE	SMD 5050
IP VOLTAGE	230V AC, 50/60Hz
RATED POWER	890/4000W
DIMENSION	D-200cm
APPLICATION	Indoors Laying, Non waterproof


Price on request

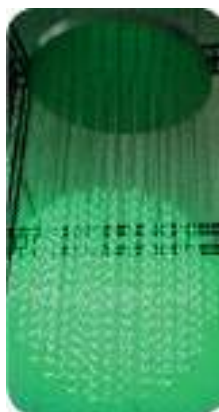

iLED 3D C22-012

MATERIAL	Iron with the baking varnish disposal with polycarbonate strips cover
MOUNTING	Ceiling Mounting
LIGHT SOURCE	SMD 5050
IP VOLTAGE	230V AC, 50/60Hz
RATED POWER	200/650W
DIMENSION	D-135cm
APPLICATION	Indoors Laying, Non waterproof


Price on request



iLED 3D H08-013

MATERIAL	Stainless Steel Housing with Transparent Acrylic cover
MOUNTING	Floor Mounting
IP VOLTAGE	230V AC, 50/60Hz
RATED POWER	3/7.5W
DIMENSION	L-11 X W-14 X H- 11 mm
APPLICATION	Indoors Laying, Non - waterproof


Price on request



iLED 3D H48-014

MATERIAL	Stainless steel and Aluminum with Polycarbonate cover
MOUNTING	Ceiling Mounting
LIGHT SOURCE	SMD 5050
IP VOLTAGE	230V AC, 50/60Hz
RATED POWER	400/1800W
DIMENSION	D-200cm
APPLICATION	Indoors Laying, Non waterproof


Price on request



iLED 3D H12-015

MATERIAL	Stainless Steel
MOUNTING	Ceiling Mounting
IP VOLTAGE	230V AC, 50/60Hz
RATED POWER	100/550W
DIMENSION	L-54 X W-54 X H- 54mm
APPLICATION	Indoors Laying, Non - water

Price on request




iLED 3D H32-016

MATERIAL	Stainless Steel
MOUNTING	Ceiling Mounting
IP VOLTAGE	230V AC, 50/60Hz
RATED POWER	1000/5000W
DIMENSION	L-2000 X W-2300 X H- 2000 mm
APPLICATION	Indoors Laying, Non - water

Price on request


iLED 3D T05-017



MATERIAL	White/Black Acrylic plate with Transparent / Brown Acrylic cover
MOUNTING	Floor Mounting
IP VOLTAGE	230V AC, 50/60Hz
RATED POWER	3/7.5W
DIMENSION	L-11 X W-14 X H-11 mm
APPLICATION	Indoors Laying, Non - waterproof

Price on request

iLED 3D H16-018



MATERIAL	Stainless Steel
MOUNTING	Wall/Floor Mounting
IP VOLTAGE	230V AC, 50/60Hz
RATED POWER	90/450W
DIMENSION	L-100 X W-110mm X H- 100 mm
APPLICATION	Indoors Laying, Non - waterproof

Price on request

CONSTANT CURRENT POWER SUPPLY

1W/300 mA	- Rs.150
1X3W/600 mA	- Rs.225
3-5W/300 mA	- Rs.250
4-7W/300 mA	- Rs.275
8-12W/300 mA	- Rs.325
12-18W/300 mA	- Rs.375
18-24W/300 mA	- Rs.425
72-80/240 mA (Tube Light)	- Rs.150



WATERPROOF POWER SUPPLY - 230 VOLTS AC

1-5W/300 mA	- Rs.300
6-10W/300 mA	- Rs.400
8-10X2W/480 mA	- Rs.525
12V/2A	- Rs.600



DIMMABLE POWER SUPPLY - CONSTANT CURRENT

5W/300 mA	- Rs.275
5-15W/300 mA	- Rs.550
24W / 36V / 600 Ma	- Rs.950
1-10V/50-90V/330 mA	- Rs.1,050
1-10V/21-36V/1300 mA	- Rs.1,750



WATERPROOF POWER SUPPLY - 12/24 VOLTS AC OR DC

1-7W/300 mA	- Rs.350
5-9W/300 mA	- Rs.450



DIMMABLE POWER SUPPLY - CONSTANT VOLTAGE

60W/24V/2.5A TRAIC DIMMABLE	- Rs.2050
100W/24V/4.1A TRAIC DIMMABLE	- Rs.2900
150W/24V/6.25A TRAIC DIMMABLE	- Rs.4000
200W/24V/8.3A TRAIC DIMMABLE	- Rs.4850
360W/24V/15A TRAIC DIMMABLE	- Rs.7000



CONSTANT VOLTAGE POWER SUPPLY

12V/1A/12W	- Rs.300
12V/2A/24W	- Rs.550
12V/4.2A/50W	- Rs.1351
12V/8.8A/100W	- Rs.1596
12V/12.5A/150W	- Rs.2450
24V/1.46A/35W	- Rs.1200
24V/2.2A/50W	- Rs.1351
24V/4.5A/100W	- Rs.1596
24V/6.5A/150W	- Rs.2450
24V/8.8A/200W	- Rs.3267
24V/14.6A/350W	- Rs.3789
24V/45W	- Rs.950
SLEEK 16V/48W (L-292 X W-18 X H-18mm)	- Rs.1150
SLEEK 18V/60W (L-292 X W-18 X H-18mm)	- Rs.1350



W / WW / NW	White / Warm White / Neutral White
R	RED
G	GREEN
B	BLUE
ECO	Economy
AP & ALP	Aluminum Profile
SMRL	Surface Mount Round Light
SMDL	Surface Mount Down Light
TL	Tube Light
PL	Pigmy Lamp
SM	Surface Mount
CB	Corn Bulb
PDL	Panel Down light
CDL	Ceiling Down Light
COB	Chip On Board
RDL	Round Down light
SDL	Square Down light
RGBL	Round Gimbal Light
SGBL	Square Gimbal Light
TRL	Track Light
TCB	Tricolor Bulb
SLPDL	Slim Panel Down Light
CBL	Cupboard Light
ASL	Anti Stumble Light
MSL	Motion Sensor Light
U&D	UP DOWN
ST BD	Stainless Steel Bollard
OL	Outdoor Light
FR	Front Removable
SQ	Square
FL	Focus Light / Flood Light
HB	Hi-Bay
IWL	Inwall Light
JL	Jewel Light
ML	Mirror Light
BRL	Burial Light
UG	Underground Light
WW	Wall Washer
GL	Garden Light
ES - SS	Exit Sign - Single Side
ES - DS	Exit Sign - Double Side
SL	Spot Lights
STL	Strip Lights
ST	Street Light
SWP	Swimming Pool Light
RRF	Retrofit
RDH	Round Hotel
DS	Departmental Store
ML	Mushroom Light
CWL	Compount Wall Light
U/D	UP or DOWN
PWL	Pathway Light
WL	Wall Light
WW	Wall Washer
GPL	Gypsum Light
RDL NA	Round Down light Non Adjustable
IA	Inter-Active
RPL	Roof / Pillar Light
PL	Pole Light
RND	Round
RL	Ray Light

Our Satisfied Customer



Our Satisfied Customer



Our Satisfied Customer



			
			
			
			
			
			
			
		<i>& More...</i>	



iLED Lighting Systems Pvt Ltd

HEAD OFFICE & FACTORY

No: 85, Developed Plot, Perungudi Industrial Estate,
Perungudi, Chennai - 600 096, Tamil Nadu, India.

SHOWROOM

Chennai - 9/6, Turn Bulls Road, Nandhanam,
Chennai - 600 035, Tamilnadu, India.

OPERATIONS AT:

UK, AUSTRALIA, DUBAI, MUSCAT, AND CHINA

PHONE : +91 - 44 - 2496 7444 / +91 9884901043

WEB : www.iled.in