



Facade/Projection Lights

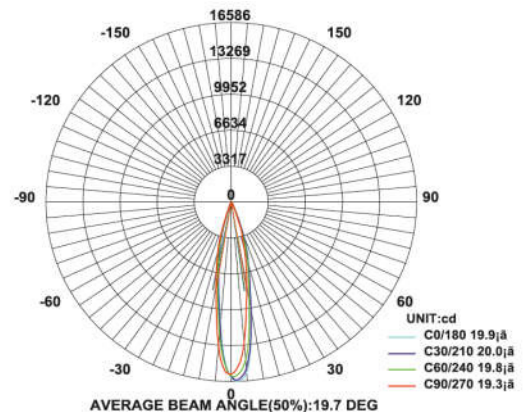



Model: iLED 40 OL 67004

PRODUCT DESCRIPTION


The Facade/Projection luminaires are in the range of 40W. Universal power supply/drivers with input range of 90 V to 305 V AC 50/60 Hz and PF >0.95. The material used is Ventilated powder coated die cast aluminum with tempered glass & reflector. It is ideal for sign, Building facade, accent, general security lighting etc.

Different fixture colours available on request. The light can travel up to 20+ floors

SPECIFICATION

Material	: Ventilated powder coated die cast aluminum with tempered glass & reflector
Lumen Efficacy	: 160 – 180 lumens
Mounting	: Surface mount
Power	: 40 W
Voltage	: 90 V to 305 V AC 50/60 Hz
Power Factor	: >0.95
LED colors	: White 6000-6400 K Neutral White 4000-4500 K Warm White 2700-3000 K
Lumen Flux	: 120-140 lm/W
Dimension	: L-280 X W-130 X H-300 mm
Driver	: Internal
Operating Temp	: -40°C ~ + 70°C
CRI	: 85
IP Rating	: IP 67
Led used	: CREE 
Dimmable Interface	: CASAMBI  , Colour tunable (2700 K – 6000 K), DALI, Edge pulse/0/1-10 V dimming control (optional)

BEAM ANGLE

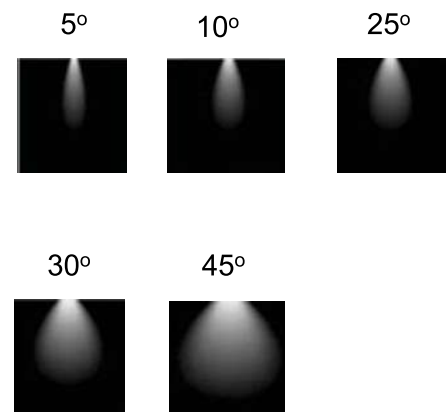

VARIANTS

MODEL	RATED POWER	DIMENSION
iLED 50 OL 67005	50 W	L-280 X W-130 X H-300 mm

ORDERING INFORMATION

iLED	40	OL	67004	W	WW	NW
Brand name	Rated Power	Outdoor Light	Model No.	White	Warm White	Neutral White

The technical specifications may vary due to continuous improvement without prior notice.

*Logos of products and companies are used for reference

www.iled.in

iLED Lighting Systems Pvt Ltd
Chennai-600096, Tamil Nadu, India