
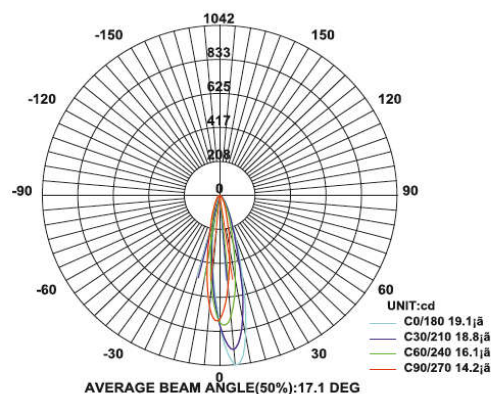


Facade/Projection Lights

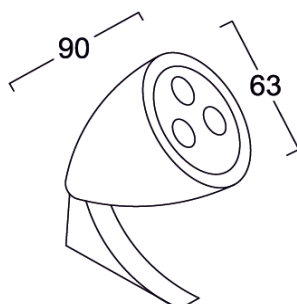

Model: iLED 6 U/D OD 670010

PRODUCT DESCRIPTION


The Facade/Projection luminaires are in the range of 6W. Universal power supply/drivers with input range of 90 V to 305 V AC 50/60 Hz and PF >0.95. The material used is Ventilated powder coated die cast aluminum with narrow beam lens. It is ideal for sign, Building facade, accent, general security lighting etc.

Different fixture colours available on request.

SPECIFICATION

| | |
|--------------------|--|
| Material | : Ventilated powder coated die cast aluminum with narrow beam lens |
| Lumen Efficacy | : 160 – 180 lumens |
| Mounting | : Surface mount |
| Power | : 6 W |
| Voltage | : 90 V to 305 V AC 50/60 Hz |
| Power Factor | : >0.95 |
| LED colors | : White 6000-6400 K Neutral White 4000-4500 K Warm White 2700-3000 K |
| Lumen Flux | : 120-140 lm/W |
| Dimension | : D-63 X H-90 mm |
| Driver | : Internal |
| Operating Temp | : -40°C ~ + 70°C |
| CRI | : 85 |
| IP Rating | : IP 67 |
| Led used | : CREE |
| Dimmable Interface | : CASAMBI , Colour tunable (2700 K – 6000 K), DALI, Edge pulse/0/1-10 V dimming control (optional) |

BEAM ANGLE

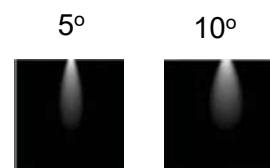

ORDERING INFORMATION

| | | | | | | |
|------------|-------------|---------|-----------|-------|------------|---------------|
| iLED | 6 | OD | 670010 | W | WW | NW |
| Brand name | Rated Power | Outdoor | Model No. | White | Warm White | Neutral White |

The technical specifications may vary due to continuous improvement without prior notice.

*Logos of products and companies are used for reference

www.iled.in

iLED Lighting Systems Pvt Ltd
Chennai-600096, Tamil Nadu, India