


Garden Light

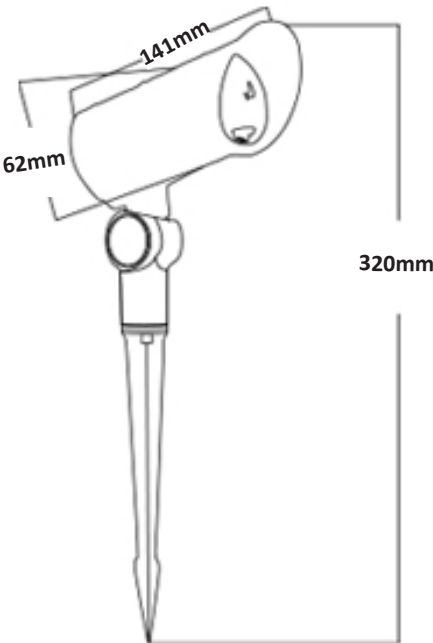

Model : iLED 10/15 GL 67005


PRODUCT DESCRIPTION

The Facade/Projection luminaires are in the range of 10/15W. Universal power supply/drivers with input range of 90 V to 305 V AC 50/60 Hz and PF >0.95. The material used is Ventilated powder coated die cast aluminum with tempered glass & reflector.It is ideal for sign, Bulding facade, accent, general security lighting etc.
Different fixture colours available on request.

SPECIFICATION

Material : Ventilated aluminum Die cast With Polished Reflector & Toughened Glass
Mounting : Surface Mount / Spike Mount
Lumen flux : 1200-1000/1800-1500 LM
Rated Power : 10/15W
Color : WW/WW/NW
Dimesion : D-62mm X L-141MM,H-320mm
IP Rating : IP67

BEAM ANGLE

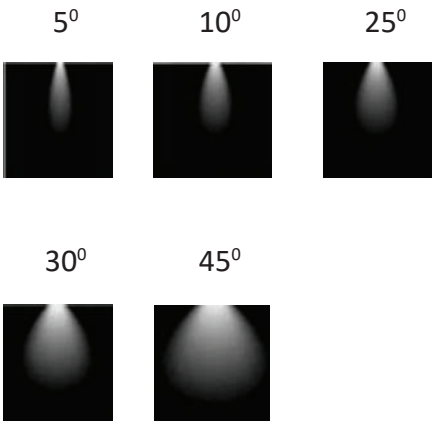

ORDERING INFORMATION

iLED	10/15	GL	67005	W	WW	NW
Brand Name	Rated Power	Outdoor Light	Model No.	White	Warm White	Neutral White