


Garden Light

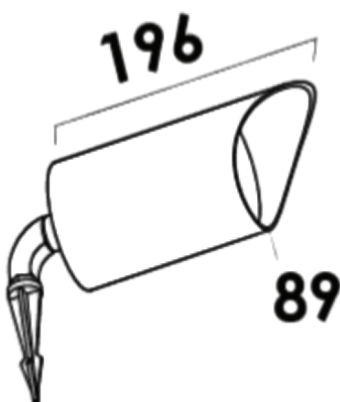

Model : iLED 10-15 GL 670014


PRODUCT DESCRIPTION

The Facade/Projection luminaires are in the range of 10-15W. Universal power supply/drivers with input range of 90 V to 305 V AC 50/60 Hz and PF >0.95. The material used is Ventilated powder coated die cast aluminum with tempered glass & reflector.It is ideal for sign, Bulding facade, accent, general security lighting etc. Different fixture colours available on request.

SPECIFICATION

Material : Ventilated aluminum Die cast With Polished Reflector & Toughened Glass
 Mounting : Spike Mount
 Lumen flux : 1300-1000 / 1950-1500Lm
 Rated Power : 10-15W
 Color : WW/WW/NW
 Dimesion : D-89 X H-196 mm
 IP Rating : IP67

BEAM ANGLE

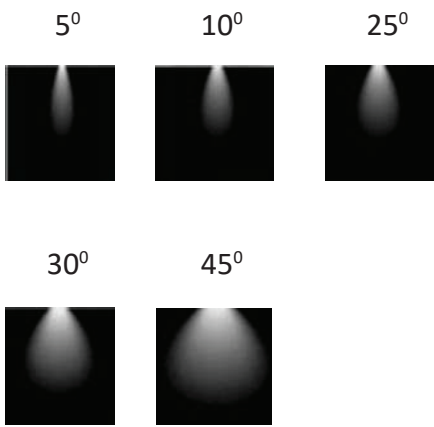

ORDERING INFORMATION

iLED	10-15W	GL	670014	W	WW	NW
Brand Name	Rated Power	Outdoor Light	Model No.	White	Warm White	Neutral White