


Garden Light

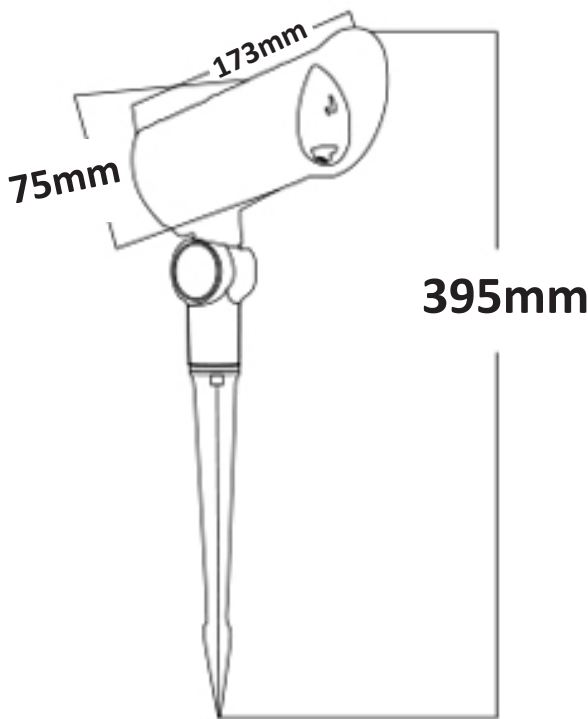

Model : iLED 20/30 GL 670014


PRODUCT DESCRIPTION

The Facade/Projection luminaires are in the range of 20/30W. Universal power supply/drivers with input range of 90 V to 305 V AC 50/60 Hz and PF >0.95. The material used is Ventilated powder coated die cast aluminum with tempered glass & reflector.It is ideal for sign, Bulding facade, accent, general security lighting etc.
Different fixture colours available on request.

SPECIFICATION

Material : Ventilated aluminum Die cast With Polished Reflector & Toughened Glass
Mounting : Surface Mount / Spike Mount
Lumen flux : 2400-2000LM /3600-3000LM
Rated Power : 20/30
Color : WW/WW/NW
Dimesion : D-75mm X L-173mm , H-395mm
IP Rating : IP67

BEAM ANGLE

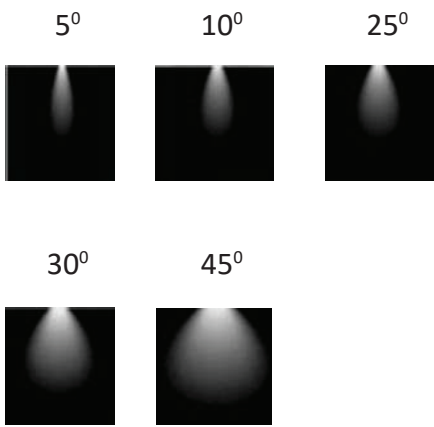

ORDERING INFORMATION

iLED	20/30	GL	670014	W	WW	NW
Brand Name	Rated Power	Outdoor Light	Model No.	White	Warm White	Neutral White