
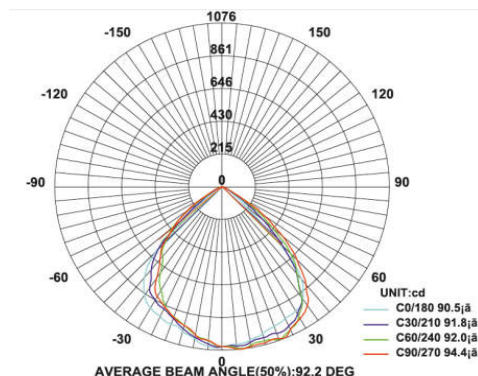


## Garden Lights /wall light IP65

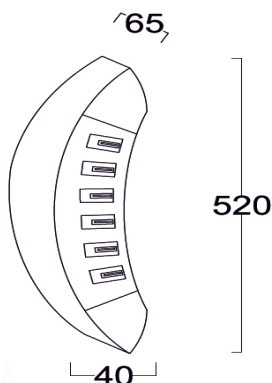

**Model:** iLED 30/40 GL 67006

### PRODUCT DESCRIPTION

The garden luminaire is made of die cast aluminium with clear diffuser and it is available in 30 W and 40 W. Universal power supply/drivers with input range of 90 V to 270 V AC 50/60 Hz and PF >0.96. It is ideal for garden, gate lights etc.

*Different fixture colours available on request.*

### SPECIFICATION

|                    |                                                                                                              |
|--------------------|--------------------------------------------------------------------------------------------------------------|
| Material           | : Ventilated powder coated aluminum with reflector & clear diffuser                                          |
| Mounting           | : Wall mount                                                                                                 |
| Power              | : 30/40 W                                                                                                    |
| Voltage            | : 90 – 270 V AC 50/60 Hz                                                                                     |
| Power Factor       | : >0.96                                                                                                      |
| LED colors         | : White 6000-6400 K<br>Neutral White 4000-4500 K<br>Warm White 2700-3000 K                                   |
| Lumen Flux         | : 120-140 lm/W (lumen efficacy: 160 -180 lm)                                                                 |
| Dimension          | : L-520 X W-80 X H-62 mm                                                                                     |
| Driver             | : External                                                                                                   |
| Operating Temp     | : -40°C ~ + 70°C                                                                                             |
| CRI                | : >85                                                                                                        |
| IP Rating          | : IP 65                                                                                                      |
| Led used           | : <b>CREE</b> ⇄                                                                                              |
| Dimmable Interface | : <b>CASAMBI</b> , Colour tunable (2700 K – 6000 K), DALI,<br>Edge pulse/0/1-10 V dimming control (optional) |

### ORDERING INFORMATION

|            |             |              |           |       |            |               |
|------------|-------------|--------------|-----------|-------|------------|---------------|
| iLED       | 30/40       | GL           | 67006     | W     | WW         | NW            |
| Brand Name | Rated Power | Garden Light | Model No. | White | Warm White | Neutral White |