
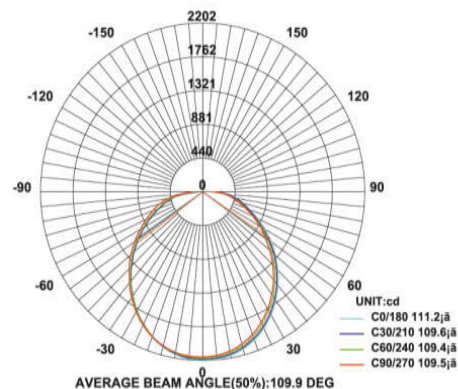


Garden/Multi projection Lights



Model: iLED 40 GL 670011

PRODUCT DESCRIPTION

The garden/ Multi projection luminaire is made of die cast aluminium with toughened glass and it is available in 40, 80 and 100 W . Universal power supply/drivers with input range of 90 V to 270 V AC 50/60 Hz and PF >0.96. It is ideal for garden, gate lights etc.

Different fixture colours available on request.

SPECIFICATION

Material	: Ventilated powder coated die cast aluminum & milky diffuser
Mounting	: Pole mount
Power	: 40 W
Voltage	: 90 – 270 V AC 50/60 Hz
Power Factor	: >0.96
LED colors	: White 6000-6400 K Neutral White 4000-4500 K Warm White 2700-3000 K
Lumen Flux	: 120-140 lm/W (lumen efficacy: 160 -180 lm)
Dimension	: W-276 X H-499 mm
Driver	: External
Operating Temp	: -40°C ~ + 70°C
CRI	: 85
IP Rating	: IP 67
Led used	: CREE ⇄
Dimmable Interface	: CASAMBI , Colour tunable (2700 K – 6000 K), DALI, Edge pulse/0/1-10 V dimming control (optional)

VARIANTS

MODEL	RATED POWER	DIMENSION
iLED 80 GL 670012	80 W	W-276 X H-499 mm
iLED 100 GL 670013	100 W	W-276 X H-499 mm

ORDERING INFORMATION

iLED	40	GL	670011	W	WW	NW
Brand Name	Rated Power	Garden Light	Model No.	White	Warm White	Neutral White

The technical specifications may vary due to continuous improvement without prior notice.

*Logos of products and companies are used for reference

www.iled.in

iLED Lighting Systems Pvt Ltd
Chennai-600096, Tamil Nadu, India