
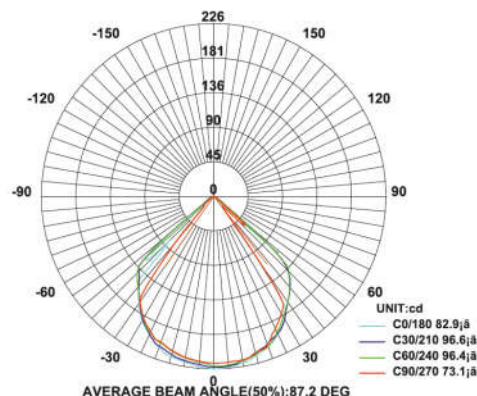


Garden Lights Spike IP65

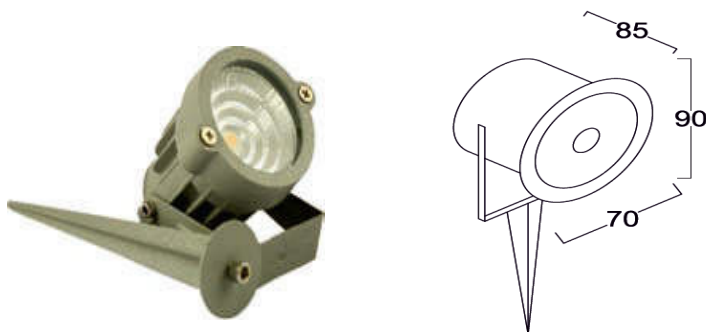

Model: iLED 5 GL 67001, iLED 8 GL 67002

PRODUCT DESCRIPTION

The garden luminaire is made of die cast aluminium with toughened glass and it is available in 5 W and 8 W. Universal power supply/drivers with input range of 90 V to 270 V AC 50/60 Hz and PF >0.96. It is ideal for garden, gate lights etc.

Different fixture colours available on request.

SPECIFICATION

Material	: Ventilated aluminum die cast with polished reflector & toughened glass
Mounting	: Surface mount/ Spike mount
Power	: 5 W, 8 W
Voltage	: 90 – 270 V AC 50/60 Hz
Power Factor	: >0.96
LED colors	: White 6000-6400 K Neutral White 4000-4500 K Warm White 2700-3000 K
Lumen Flux	: 120-140 lm/W (lumen efficacy: 160 -180 lm)
Dimension	: D-60 X H-275 mm, D-95 X H-260 mm
Driver	: Internal
Operating Temp	: -40°C ~ + 70°C
CRI	: >85
IP Rating	: IP 65
Led used	: CREE ⇄
Dimmable Interface	: CASAMBI , Colour tunable (2700 K – 6000 K), DALI, Edge pulse/0/1-10 V dimming control (optional)

ORDERING INFORMATION

iLED	5	GL	67001	W	WW	NW
Brand name	Rated Power	Garden Light	Model No.	White	Warm White	Neutral White

The technical specifications may vary due to continuous improvement without prior notice.

*Logos of products and companies are used for reference

www.iled.in

iLED Lighting Systems Pvt Ltd
Chennai-600096, Tamil Nadu, India