
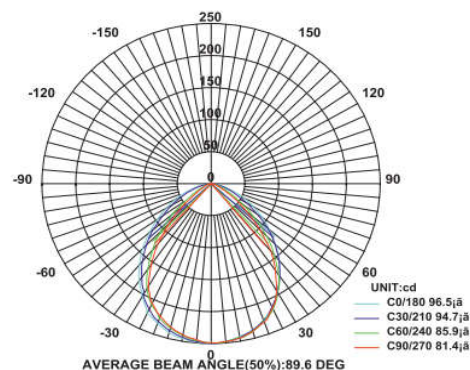


In wall Lights Outdoor



Model: iLED 35 IWL 67007 -IP 65

PRODUCT DESCRIPTION

The recessed mount wall luminaire is made of aluminium die cast with powder coated and glass depending on the fixture size it is available in the range of 35 W. Universal power supply/drivers with input range of 90 V to 270 V AC, 50/60 Hz and PF >0.96. It is ideal for outdoor, passages, corridors, RAMP etc.

Different fixture colours available on request.

SPECIFICATION

Material	: Aluminum die cast with powder coated and glass
Mounting	: In wall
Power	: 35 W
Voltage	: 90 – 270 V AC ,50/60 Hz
Power Factor	: >0.96
LED colors	: White 6000-6400 K Neutral White 4000-4500 K Warm White 2700-3000 K
Lumen Flux	: 120-140 lm/W (lumen efficacy: 160 -180 lm)
Dimension	: L-260 X W-245 X H-60 mm H-110mm
Cut out dimension	: L-256 X W-236 X H-95mm
Driver	: Internal
Operating Temp	: -40°C ~ + 70°C
CRI	: 85
IP Rating	: IP 65
Led used	: CREE 
Dimmable Interface	: CASAMBI , Colour tunable (2700 K – 6000 K), DALI, Edge pulse/0/1-10 V dimming control (optional)

ORDERING INFORMATION

iLED	35	IWL	67007	W	WW	NW
Brand name	Rated Power	In Wall Light	Model No.	White	Warm White	Neutral White

The technical specifications may vary due to continuous improvement without prior notice.

*Logos of products and companies are used for reference

www.iled.in

iLED Lighting Systems Pvt Ltd
Chennai-600096, Tamil Nadu, India